

QSDC-400-3000-10-20-S

0.4~3GHz, 10W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4~3GHz
Insertion Loss:	0.5dB max.
Coupling:	20±1dB
Coupling Flatness:	±1dB max.
Directivity:	20dB min.
VSWR:	1.3 max.
Average Power:	10W max.

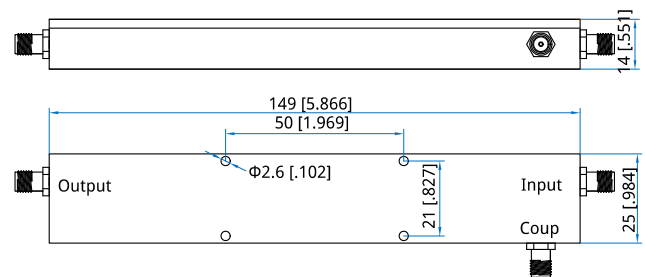
Mechanical

Size*1:	149*25*14mm 5.866*0.984*0.551in
Connectors:	SMA Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-400-3000-10-20-S

Customization is available upon request.