

QSDC-400-3900-K1-20-N

0.4~3.9GHz, 100W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4~3.9GHz
Insertion Loss:	0.5dB max.
Coupling:	20±2dB
Coupling Flatness:	±1dB max.
Directivity:	17dB min.
VSWR:	1.2 max.
Average Power:	100W max.

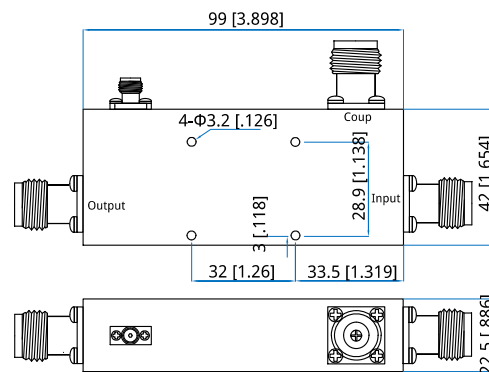
Mechanical

Size*1:	99*42*22.5mm 3.898*1.654*0.886in
Connectors:	N Female, SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order
[QSDC-400-3900-K1-20-N](#)

Customization is available upon request.