

## QSDC-4000-16000-30-10-S

4~16GHz, 30W, 10dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	4~16GHz
Insertion Loss:	1.2dB max.
VSWR:	1.5 max.
Directivity:	12dB min.
Coupling:	10±1.2dB
Average Power:	30W
Impedance:	50Ω

### Mechanical


Size*1:	43*15*11mm 1.693*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole 4-M2,depth 5mm

[1] Exclude connectors and terminations.

### Environmental

Temperature:	-35~+75°C
--------------	-----------

### Outline Drawings

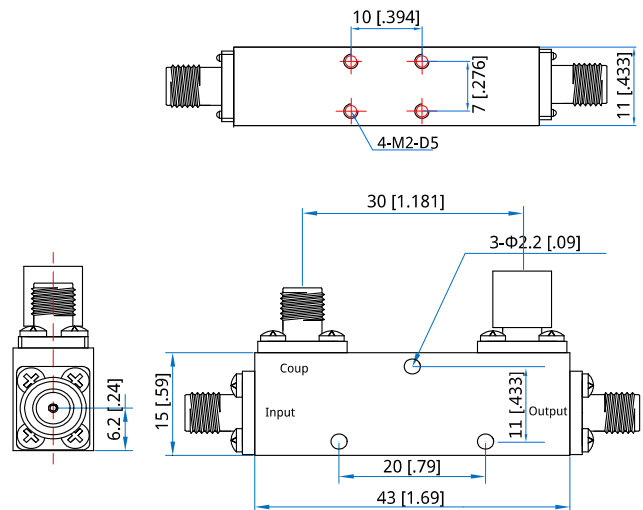

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QSDC-4000-16000-30-10-S**

Customization is available upon request.