

QSDC-600-3000-K2-20-NS

0.6~3GHz, 200W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.6~3GHz
Insertion Loss:	0.7dB max.
Coupling:	20±1.2dB
Coupling Flatness:	±1.5dB
Directivity:	16dB min.
VSWR (Mainline):	1.25 max.
VSWR (Coupling):	1.35 max.
Average Power:	200W
Impedance:	50Ω

Mechanical


Size*1:	120*26*22mm 4.724*1.024*0.866in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

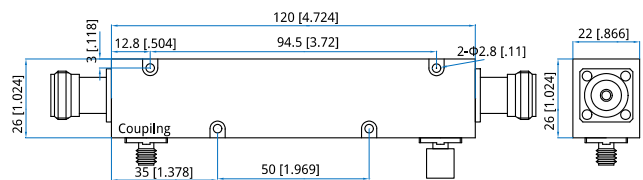

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-600-3000-K2-20-NS

Customization is available upon request.