

QSDC-6000-18200-30-6-S

6~18.2GHz, 30W, 6dB

Features:
 * Broadband
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	6~18.2GHz
Insertion Loss:	1.2dB max.
VSWR:	1.5 max.
Directivity:	12dB min.
Coupling:	6±1dB
Frequency Sensitivity:	±1dB max.
Impedance:	50Ω
Average Power:	30W

Mechanical


Size ^{*1} :	33*15*11mm 1.299*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

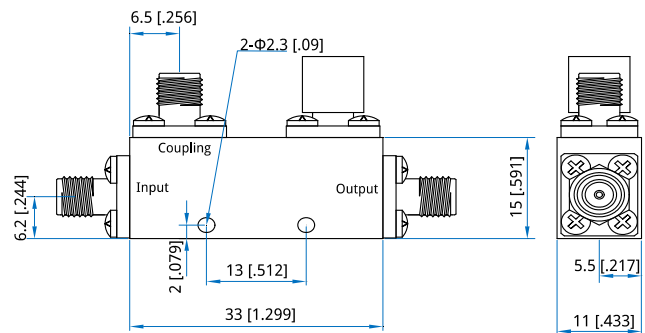

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QSDC-6000-18200-30-6-S

Customization is available upon request.