

# QWCA-340-7

## WR-340 to L29

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 2.17~3.3GHz  
VSWR: 1.2 max.

### Mechanical

Coax Connectors: L29  
Waveguide Size: WR-340  
Flange: FDP26  
Material: Aluminium

### How To Order

**QWCA-340-X-Y-Z**

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:

7 - L29 Male (Outline A)

7F - L29 Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

1 - FBP

2 - FDP (Outline A)

3 - FBM


4 - FDM

Examples:

To order a waveguide to coax adapter, WR-340 to L29 female, right angle, FDP, specify QWCA-340-7F-R-2.

Customization is available upon request.

### Outline Drawings

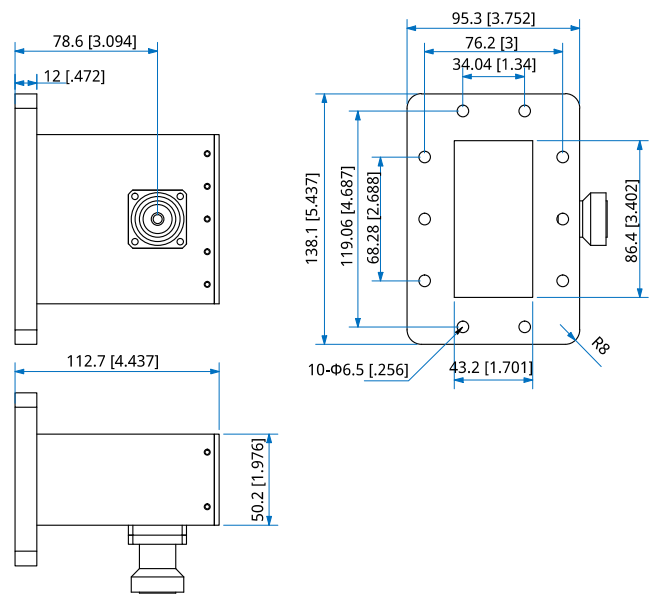

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]