QWCA-D750-S

WRD-750 to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	7.5~18GHz
VSWR:	1.25 max.
Impedance:	50Ω

Mechanical

RF Connectors:	SMA
Interface:	WRD-750
Flange:	FPWRD750
Material:	Aluminium

How To Order

QWCA-D750-S-X-Y-Z

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:
S - SMA Male (Outline A)
SF - SMA Female (Outline A)

Configuration naming rules:
E - End launch
R - Right angle (Outline A)

Flange naming rules:
8 - FPWRD (Outline A)

Examples:
To order a waveguide to coax adapter, WR-D750 to N female, right angle, FPWRD, specify QWCA-D750-SF-R-8.

Customization is available upon request.

Outline Drawings

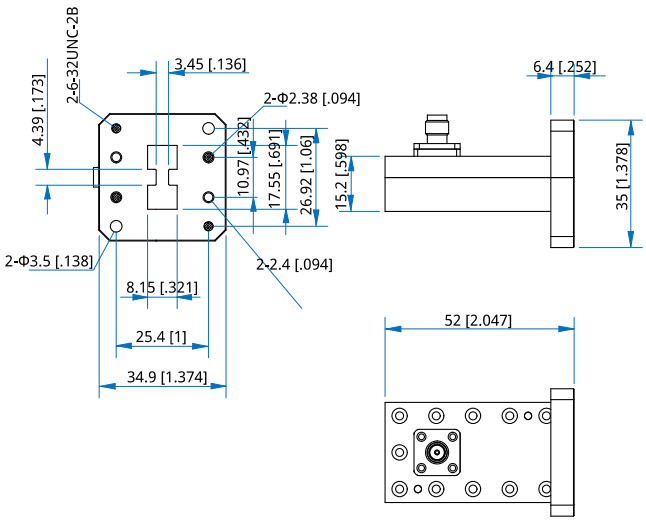

Outline A

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]