

QWD-28

WR-28, 26.5~40GHz

Features:

- * Broadband
- * High Sensitivity

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

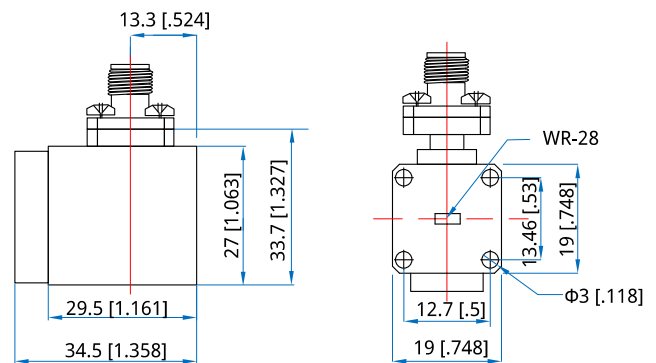
Frequency Range:	26.5~40GHz
Sensitivity:	300mV/mW
Flatness:	±1.5dB max.
Polarity:	Negative
Input Power Without Damage:	20dBm

Mechanical

Size:	34.5*33.7*19mm 1.358*1.327*0.748in
Weight:	150g max.
Input Connector:	WR-28
Output Connector:	SMA Female

Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
QWD-28

Customization is available upon request.