

## QWRJ1-14500-46

Single Channel, 13.75~14.5GHz, 46mm

**Features:**

- \* Low VSWR
- \* Low VSWR Flatness
- \* Low Insertion Loss Flatness

**Applications:**

- \* High Speed Digital Signal Transmission
- \* Analog Signal Transmission

### Electrical

Frequency:	13.75~14.5GHz
VSWR:	1.2 max.
VSWR Flatness:	0.1 max.
Insertion Loss:	0.2dB max.
Insertion Loss Flatness:	0.05 dB max.
Average Power:	200W max.
Peak Power:	5000W max.
IP Grade:	IP40


### Mechanical

Rotating Speed:	120RPM max.
Operation Life:	10M Cycles

### Environmental

Temperature:	-40~+70°C
--------------	-----------

### Outline Drawings

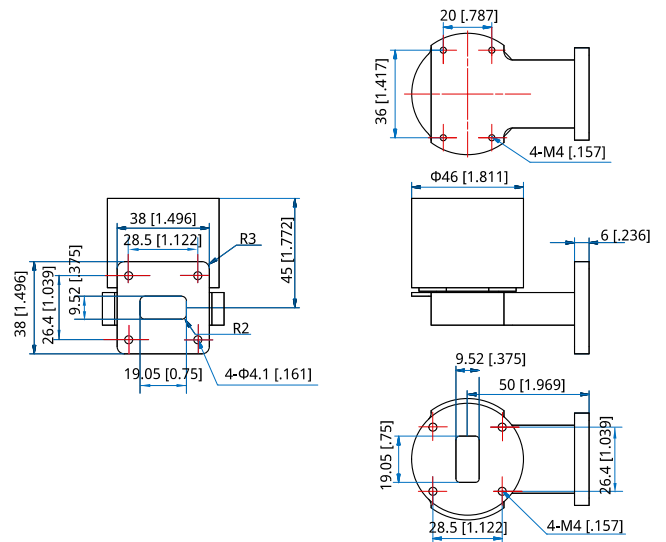

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

[QWRJ1-14500-46](#)

Customization is available upon request.