

QWT159-L WR-159

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 4.64~7.05GHz
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-159 (BJ58)
Flange: FDP58

Environmental

Temperature: -55~+125°C

Outline Drawings

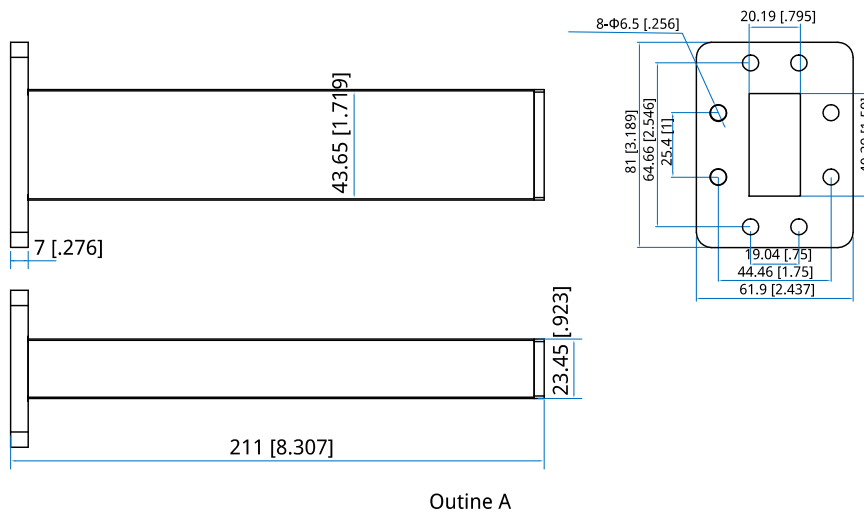

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT159-L-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP58 (Outline A)

Examples:

To order a low power waveguide termination, WR-159, low power, Aluminum, FDP58, specify QWT159-L-A-2.

Customization is available upon request.