

QWT284-L WR-284

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 2.6~3.95GHz
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-284 (BJ32)
Flange: FDP32

Environmental

Temperature: -55~+125°C

Outline Drawings

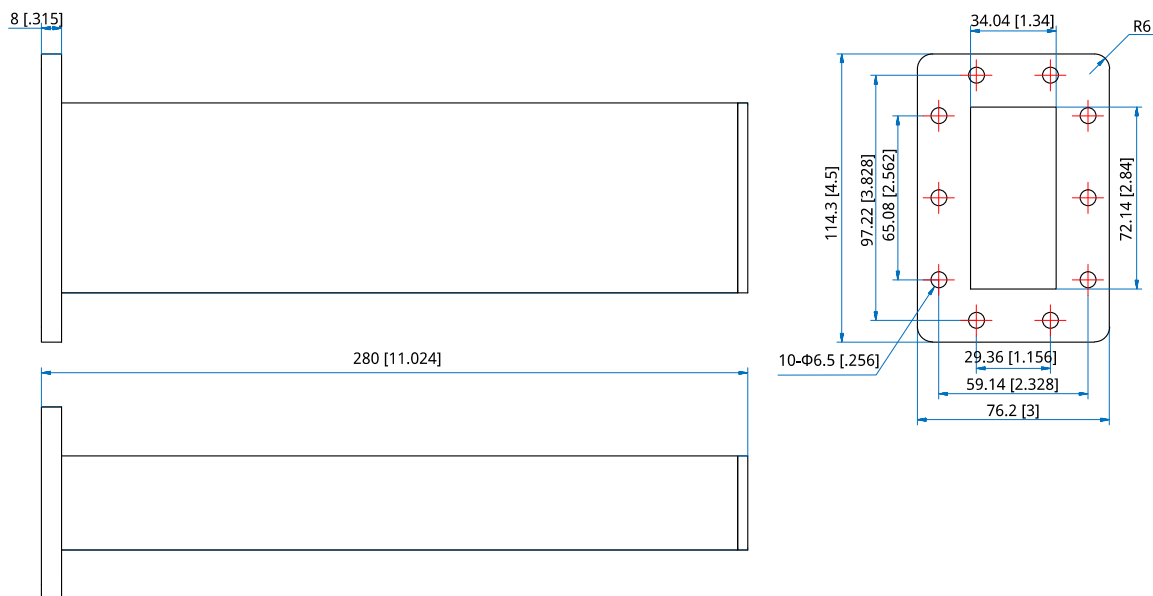

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT284-L-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
2 - FDP32 (Outline A)

Examples:
To order a low power waveguide termination, WR-284, low power, Aluminum, FDP32, specify QWT284-L-A-2.

Customization is available upon request.