

QWT34-2K5 WR-34, 2.5KW

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 21.7~33GHz
Average Power: 2.5KW
VSWR: 1.15 max.


Mechanical

Waveguide Size: WR-34 (BJ260)
Flange: FBP260

Environmental

Temperature: -55~+125°C

Outline Drawings

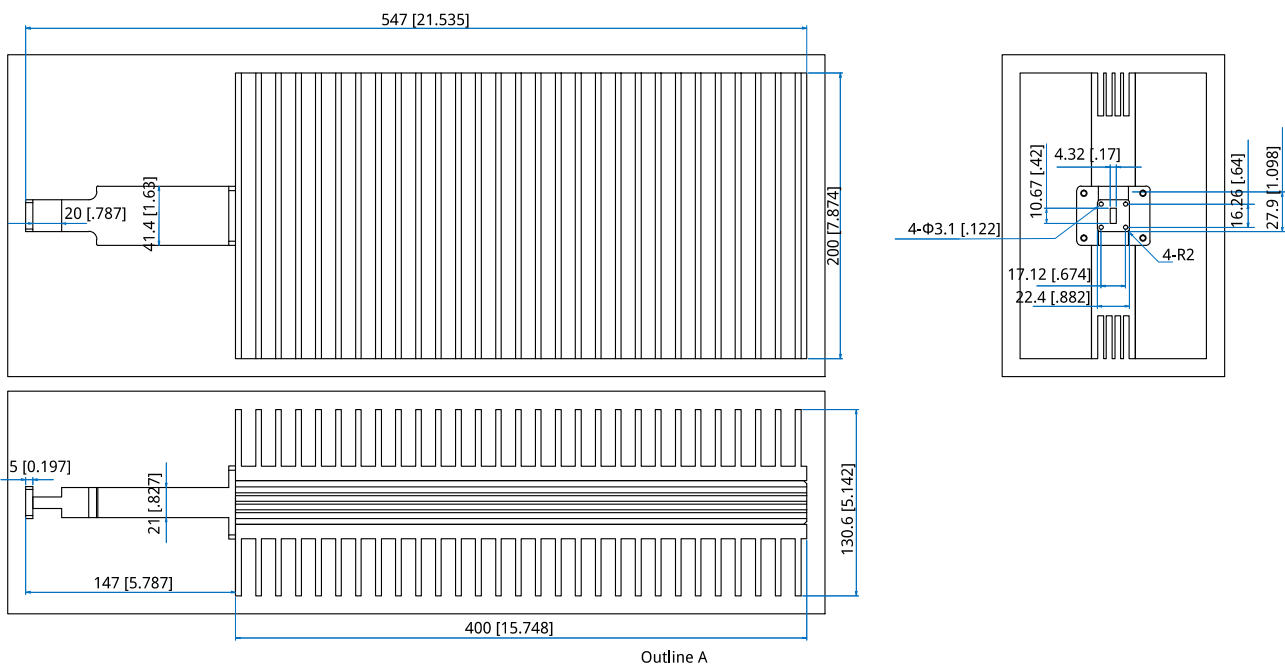

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT34-2K5-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
1 - FBP260 (Outline A)

Examples:
To order a high power waveguide termination, WR-34, 2.5KW, Aluminum, FBP260, specify QWT34-2K5-A-1.

Customization is available upon request.