

QWT34-L WR-34

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 21.7~33GHz
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-34 (BJ260)
Flange: FBP260

Environmental

Temperature: -55~+125°C

Outline Drawings

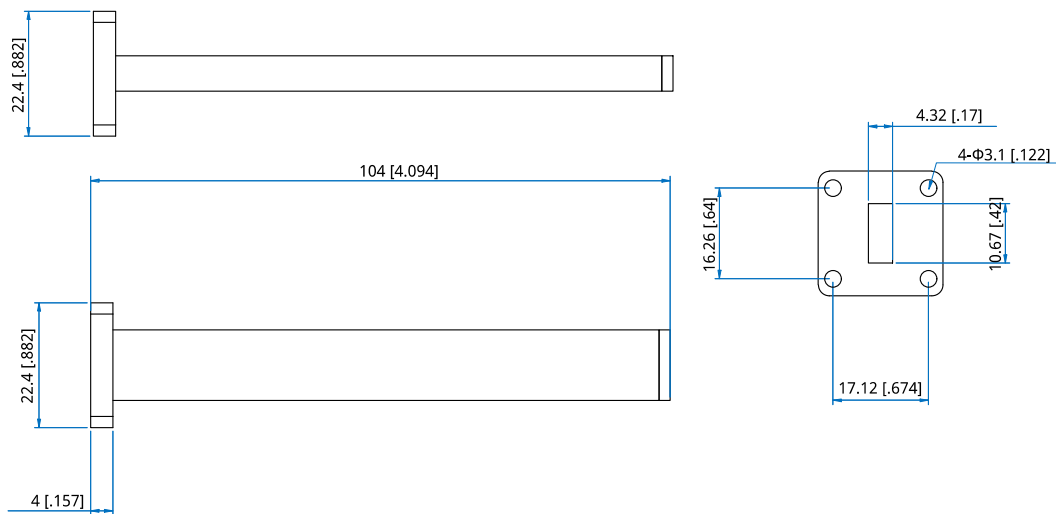

Outline A

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QWT34-L-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP260 (Outline A)

Examples:

To order a low power waveguide termination, WR-34, low power, Aluminum, FBP260, specify QWT34-L-A-1.

Customization is available upon request.