

## QWT62-20

### WR-62, 20W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

#### Electrical

Frequency: 11.9~18GHz  
Average Power: 20W  
VSWR: 1.2 max.


#### Mechanical

Waveguide Size: WR-62 (BJ140)  
Flange: FBP140


#### Environmental

Temperature: -55~+125°C

#### Outline Drawings

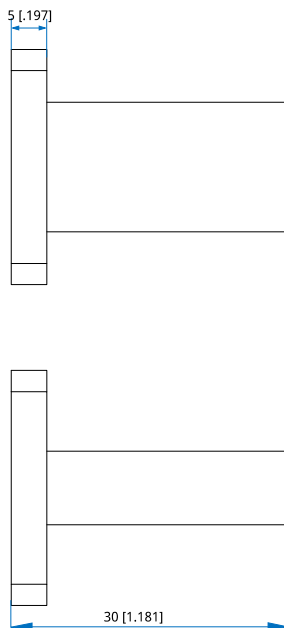

Outline A

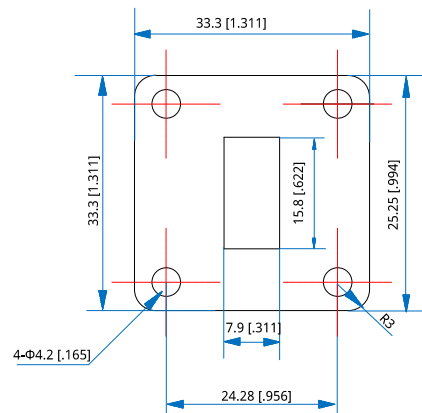

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QWT62-20-Y-Z**

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP140 (Outline A)

Examples:

To order a small size waveguide termination, WR-62, 20W, Aluminum, FBP140, specify QWT62-20-A-1.

Customization is available upon request.