Qualwave

Low Power Waveguide Termination

QWT62-L

WR-62

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency:	11.9~18GHz
VSWR:	1.03 max.

Mechanical

Waveguide Size:	WR-62 (BJ140)
Flange:	FBP140

Environmental

Temperature:	-55~+125℃

Outline Drawings

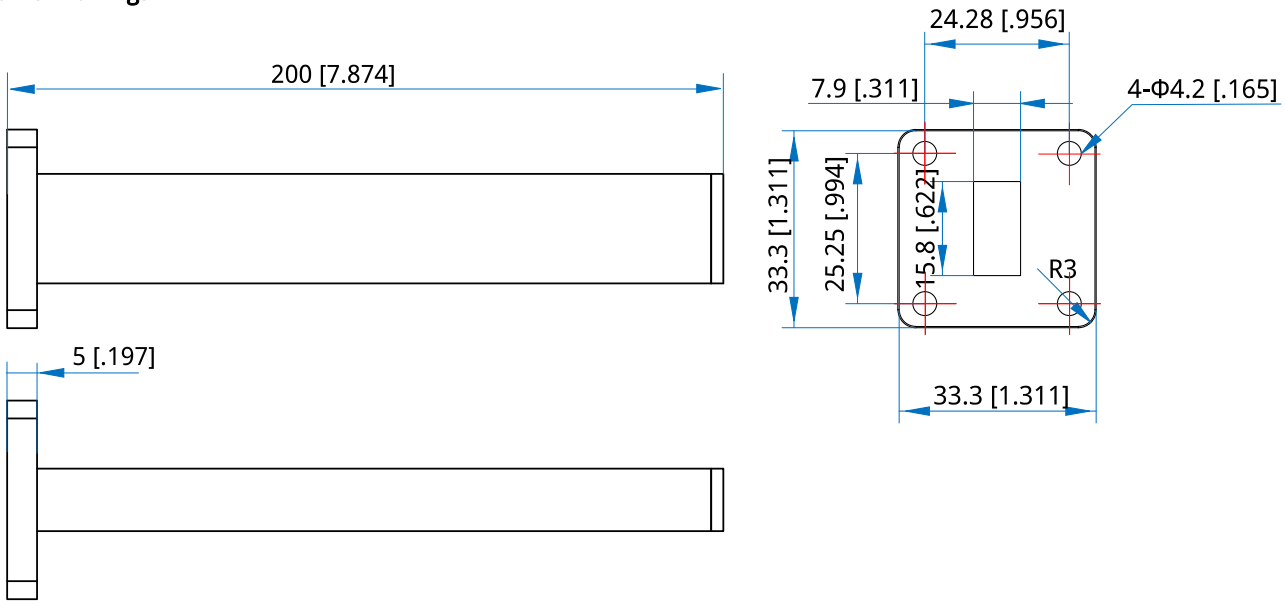

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT62-L-Y-Z

Y : Material
Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
1 - FBP140 (Outline A)

Examples:
To order a low power waveguide termination, WR-62, FBP140, specify QWT62-L-A-1.

Customization is available upon request.