

QWT75-L WR-75

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 9.84~15GHz
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-75 (BJ120)
Flange: FBP120

Environmental

Temperature: -55~+125°C

Outline Drawings

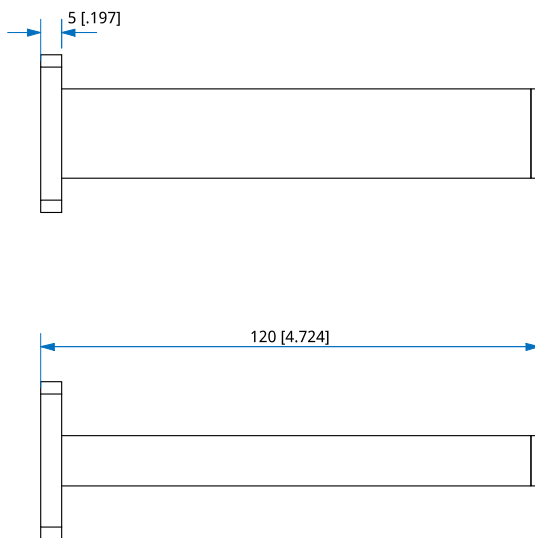

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]


How To Order

QWT75-L-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

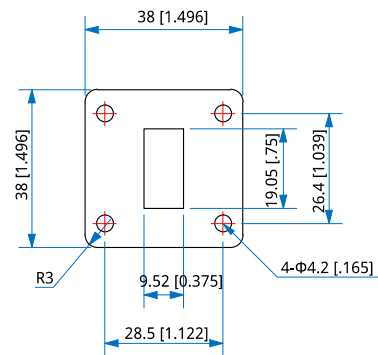

Flange naming rules:

1 - FBP120 (Outline A)

Examples:

To order a low power waveguide termination, WR-75, low power, Aluminum, FBP120, specify QWT75-L-A-1.

Customization is available upon request.