




For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WR	WR112
Frequency Range(GHz)	6.0 – 12.4
Insertion Loss(dB)	0.21 Max.
VSWR	1.25:1 Max.
Flange	FBP84(UBR84)
Connector	SMA-Female
Average Power(W CW)	50 Max.
Peak Power(KW)	3
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	40 x 47.8 x 47.8
Net Weight(Kg)	0.08 Around

Outline Drawing (Size: mm)

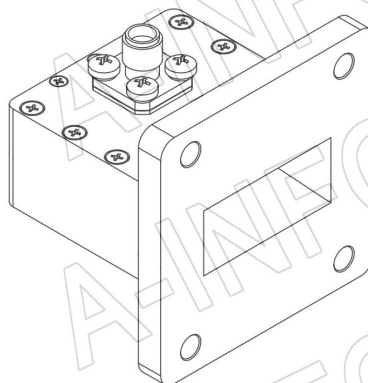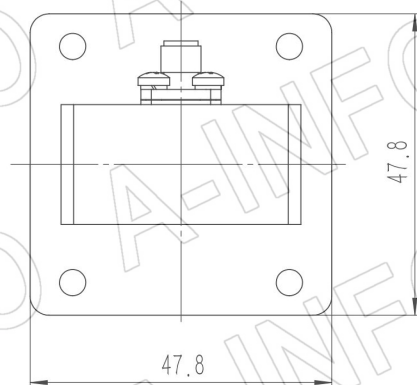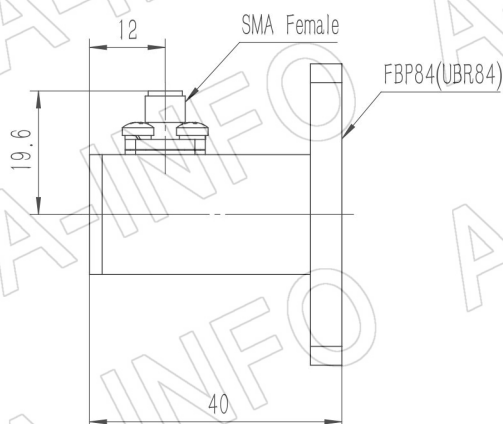

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

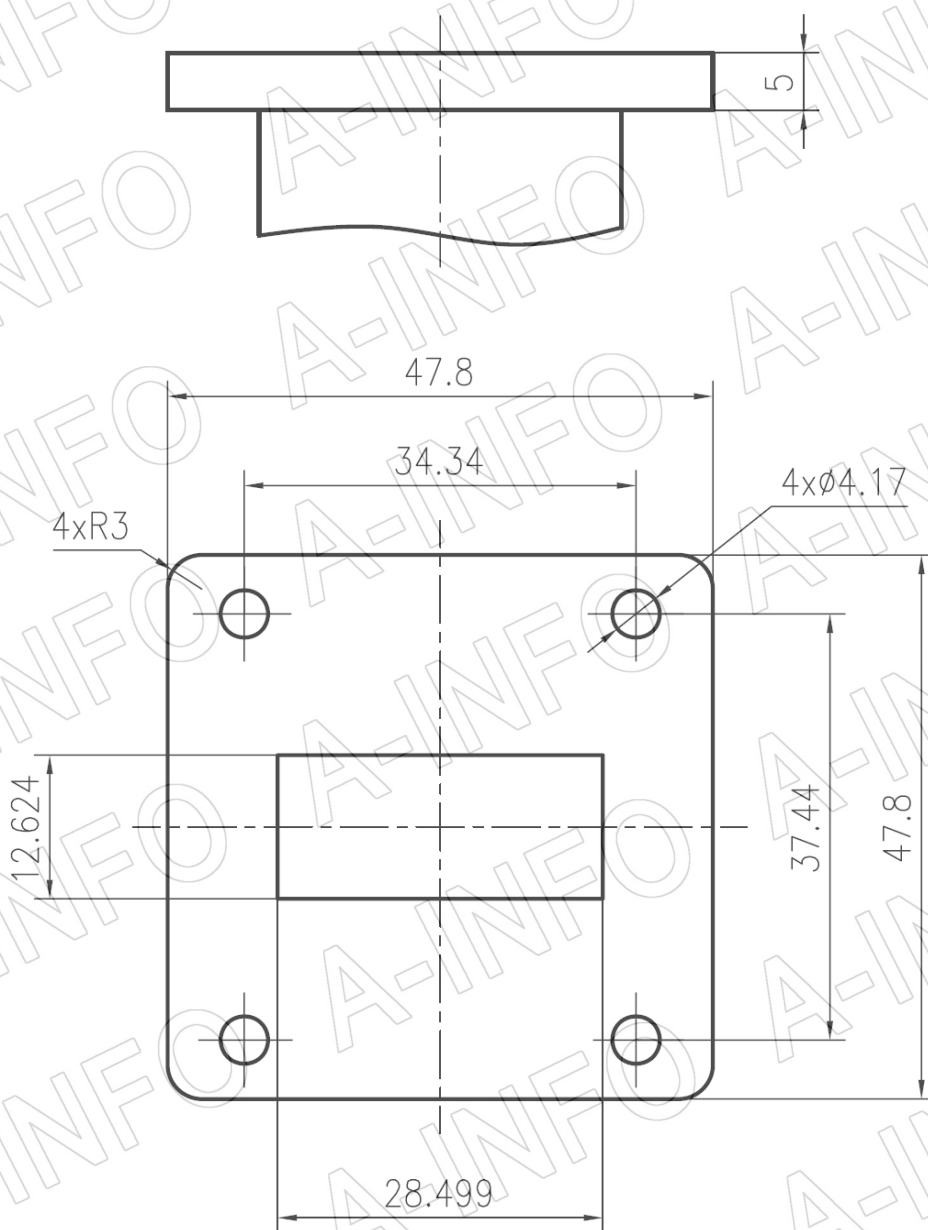

FBP84

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

Page 2 of 3


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Insertion Loss(Test with two adapters back to back)

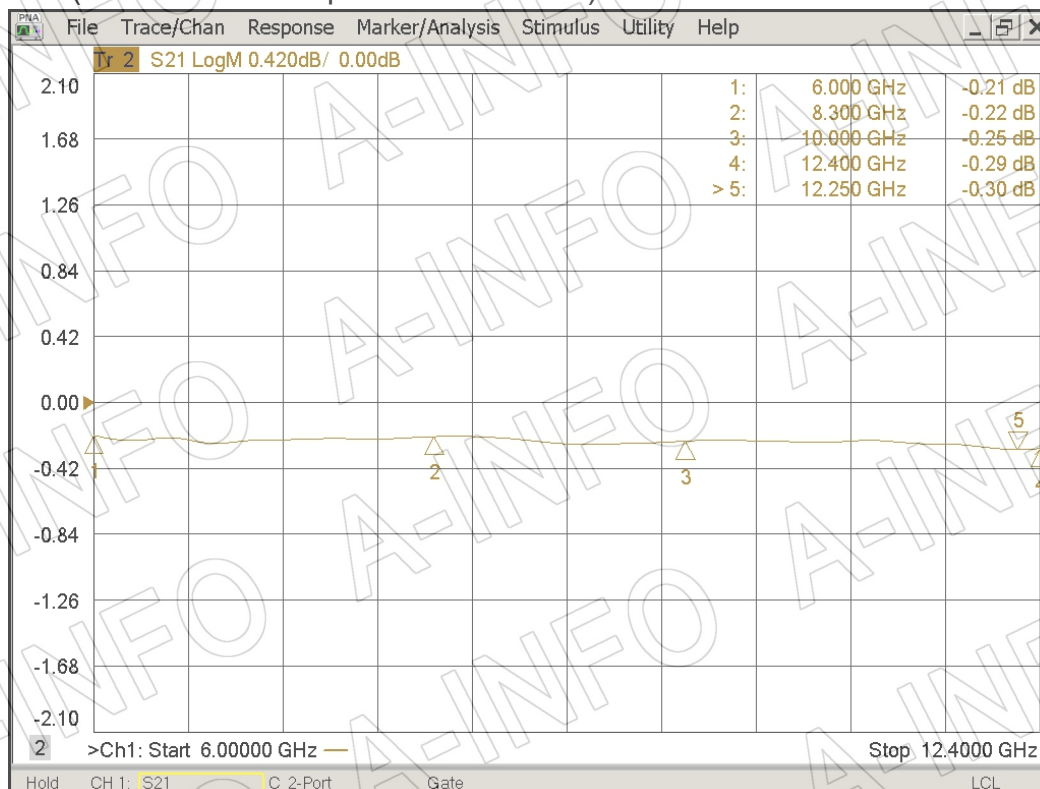

VSWR

