



For reference only. See data sheet for the detailed specifications.

Technical Specification

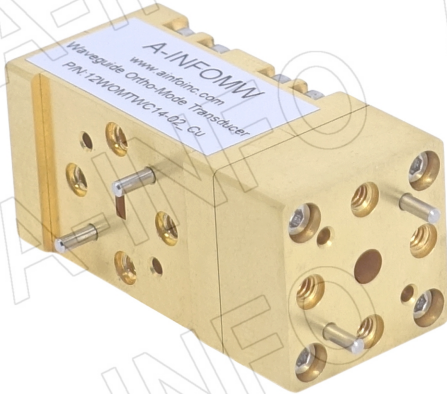

EIA WR	WR12
Frequency Range(GHz)	60.0 – 90.0
Bandwidth	Full
Common Port	3.58mm / 0.141" Circular WG
Insertion Loss(dB)	0.8 Max.
VSWR	1.50:1 Typ.
Cross Pol. Isolation(dB)	45 Typ.; 35 Min.
Port to Port Isolation(dB)	40 Min.
Common Port Flange	UG-387/U-M
Flange	FUGP740(UG-387/U)
Material	Cu
Size(mm)	43.18 x 20.32 x 20.32
Net Weight(Kg)	0.12 Around

Outline Drawing (Size: mm)

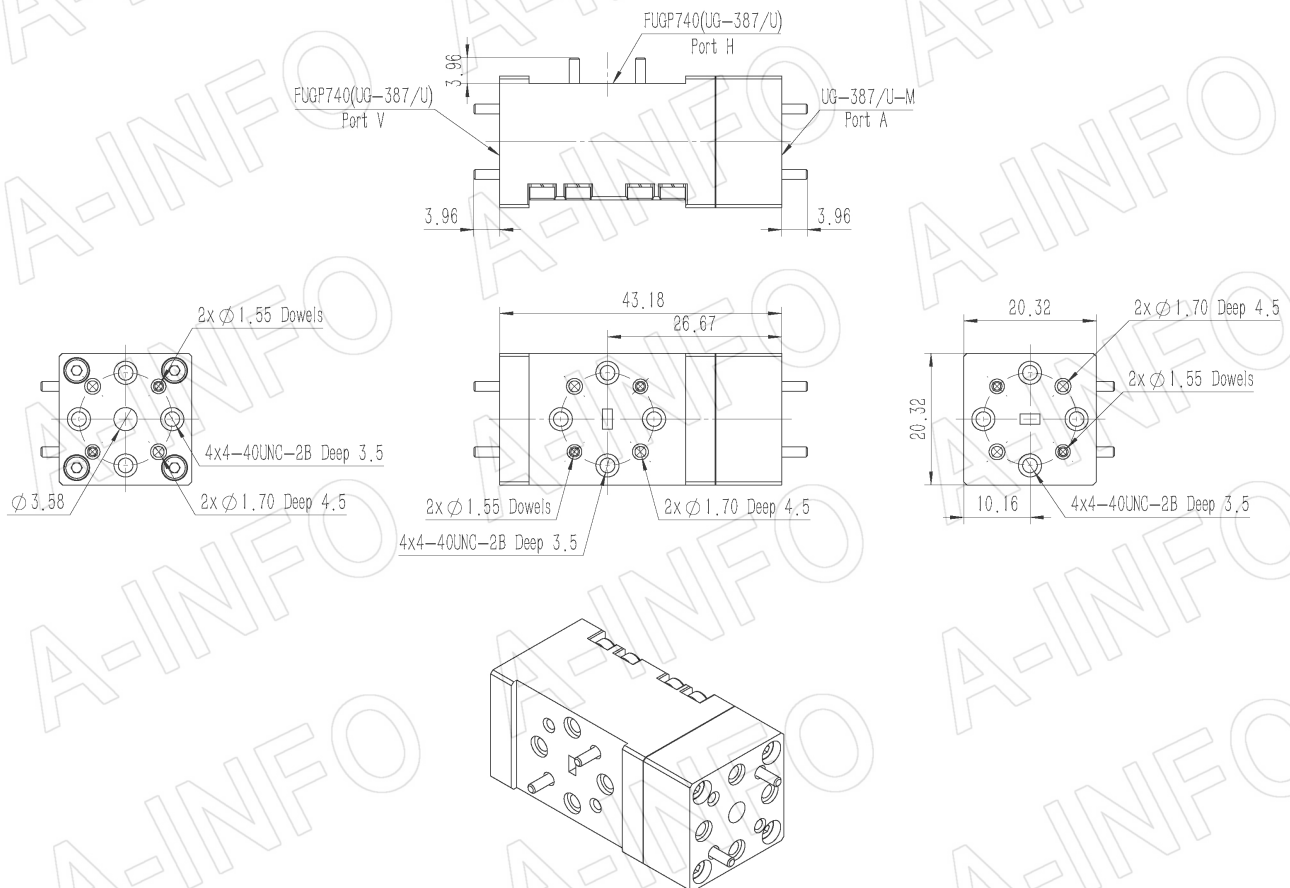

AINFO Inc.


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 5


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

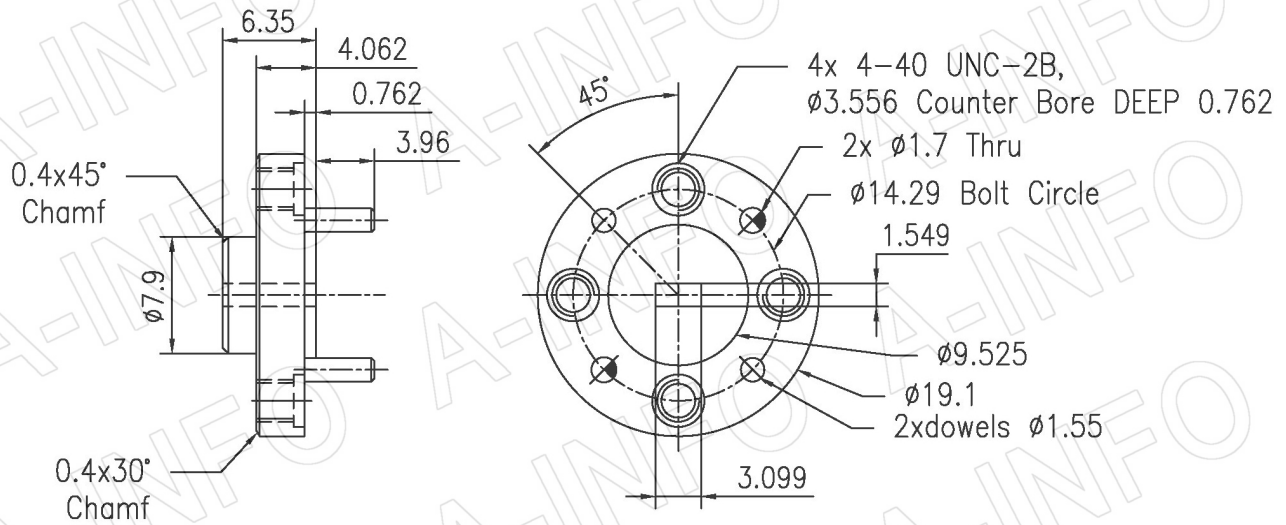


FUGP740
(equivalent to UG-387/U)

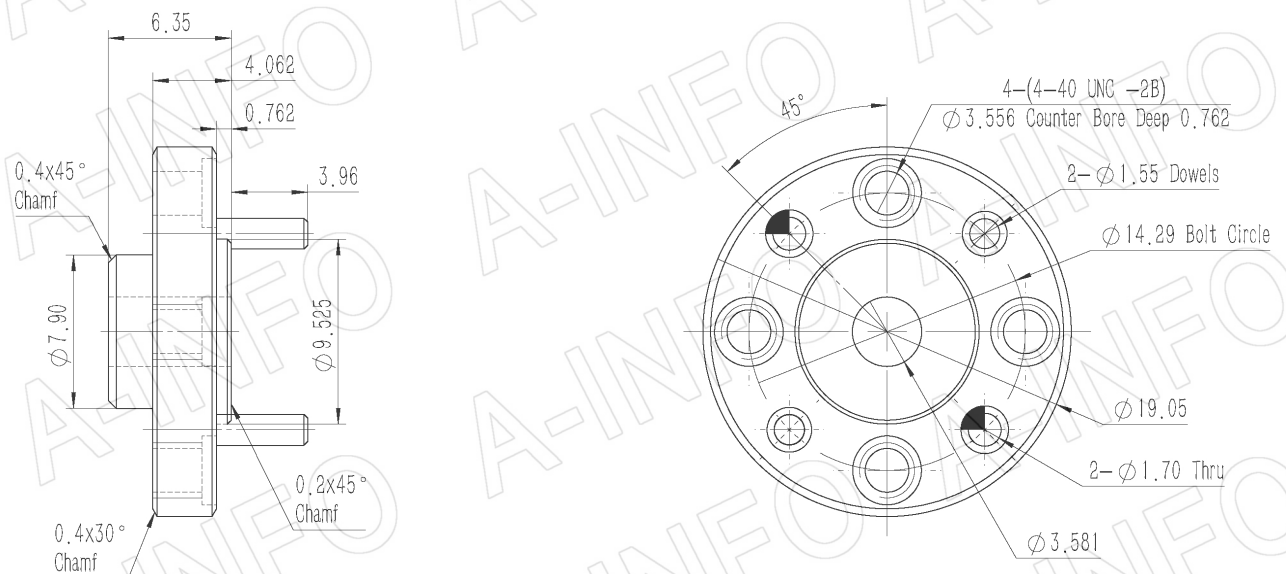


UG-387/U-M

Test Results

Port H_ Insertion Loss(Test with two OMT back to back)

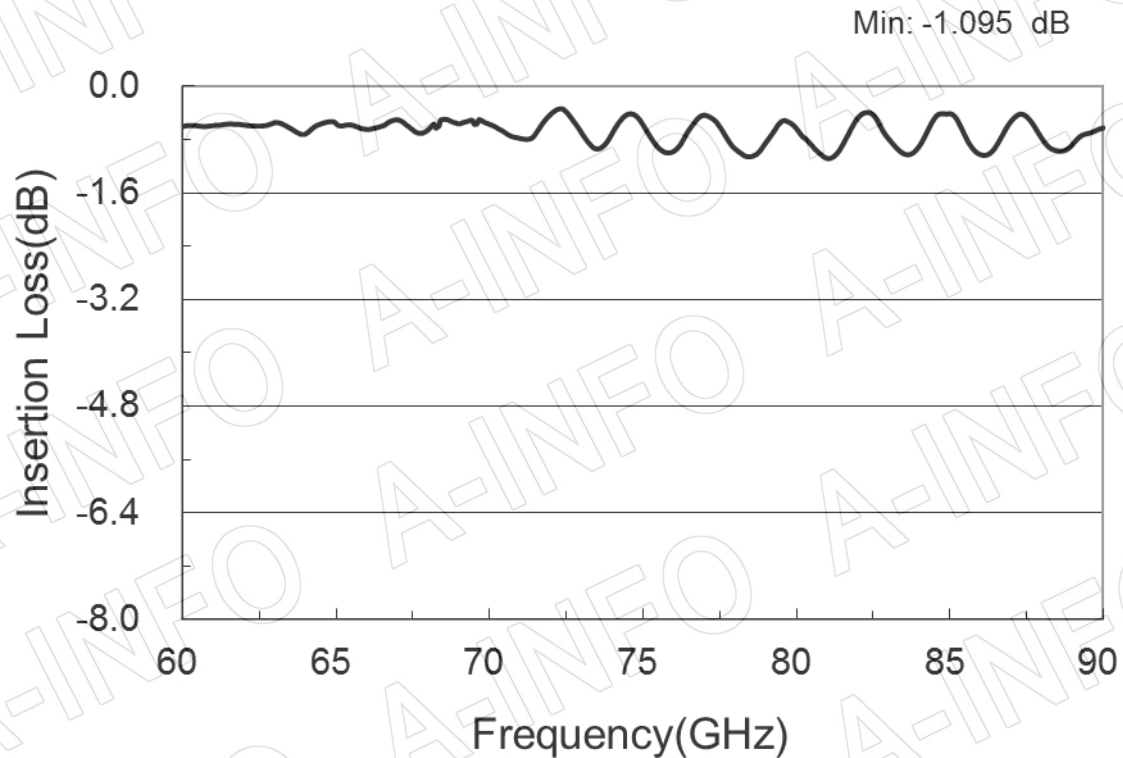


Port V_ Insertion Loss(Test with two OMT back to back)

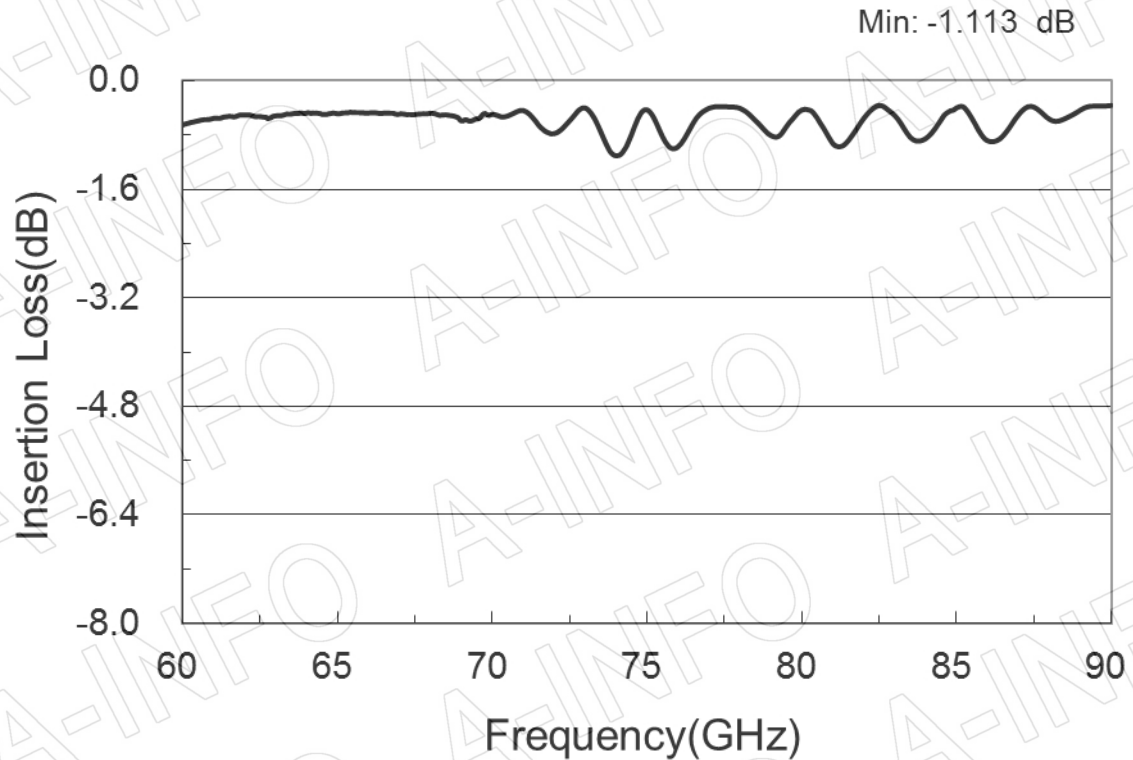


Port H_VSWR

Max: 1.573

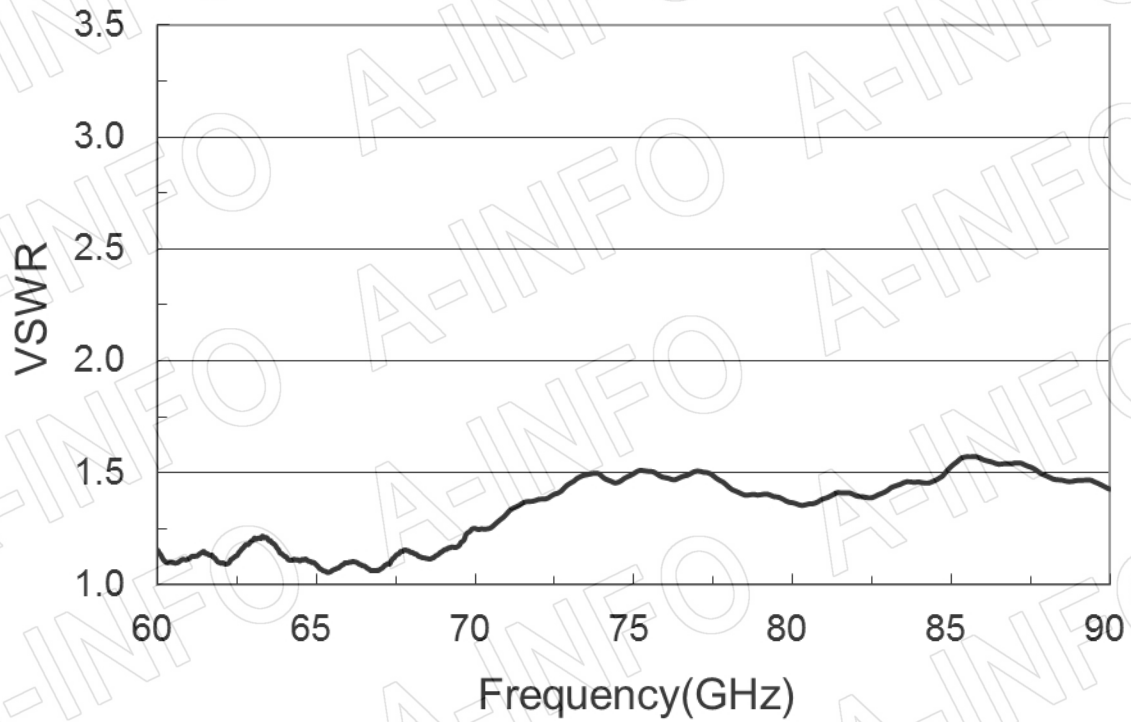


Port V_VSWR

Max: 1.528

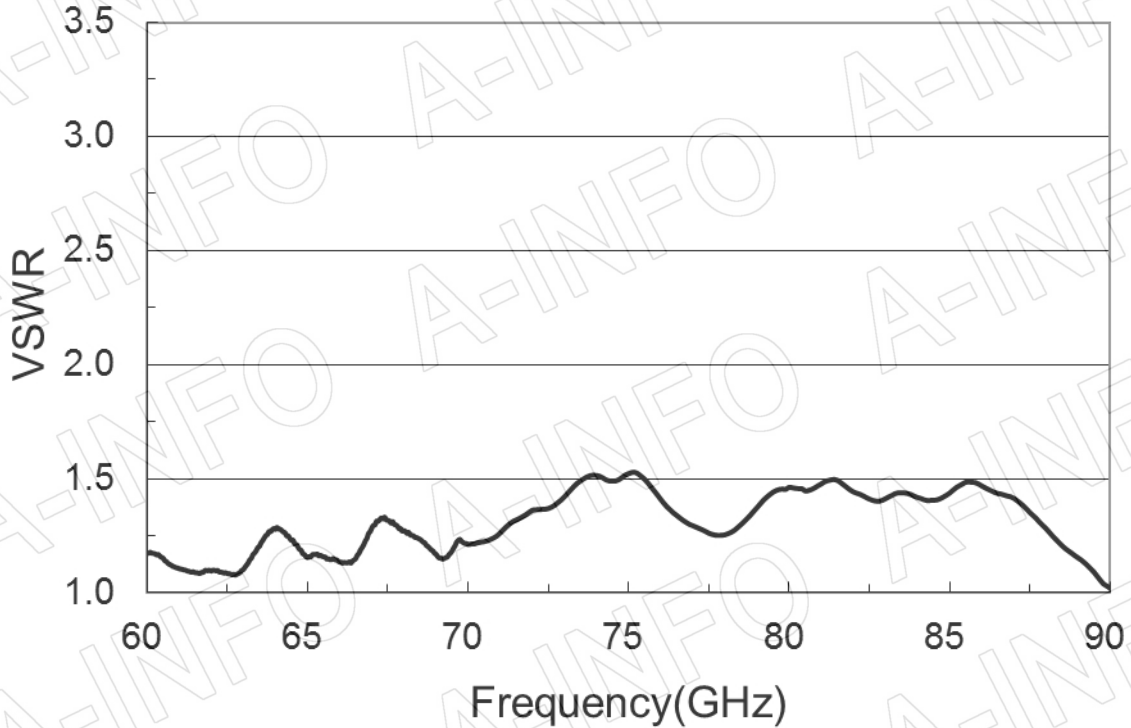

Cross Polarization Isolation

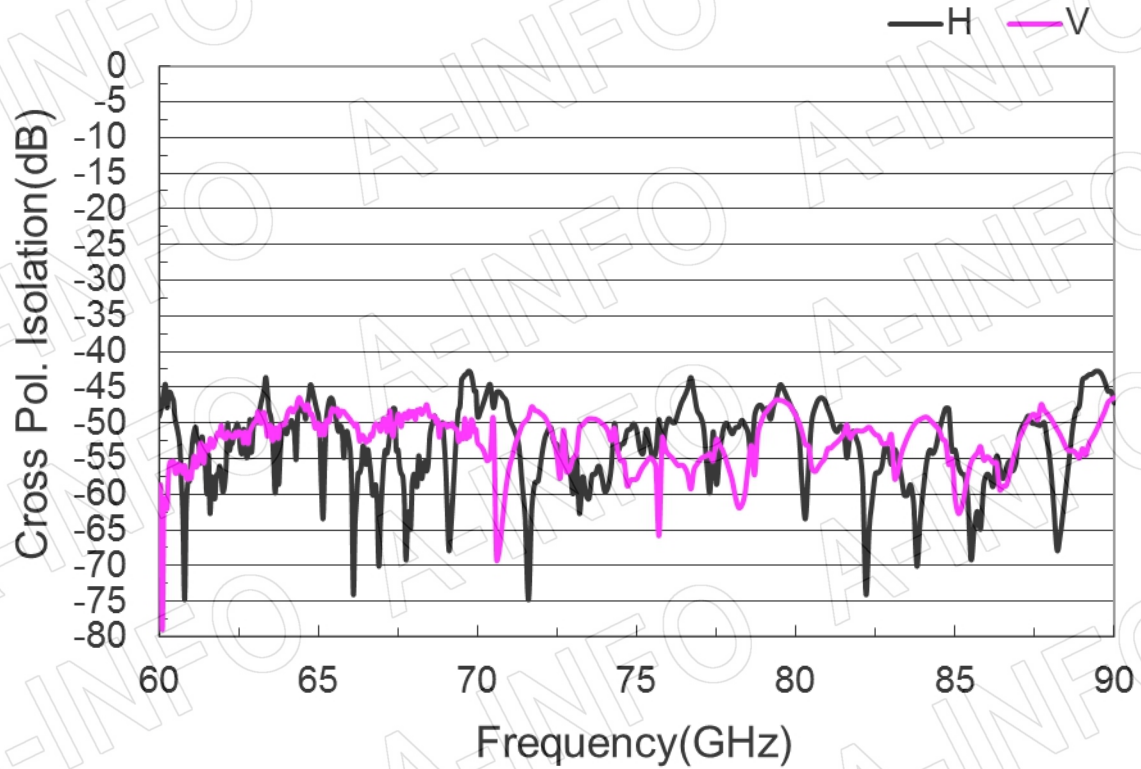

Port to Port Isolation

