



For reference only. See data sheet for the detailed specifications.

Technical Specification

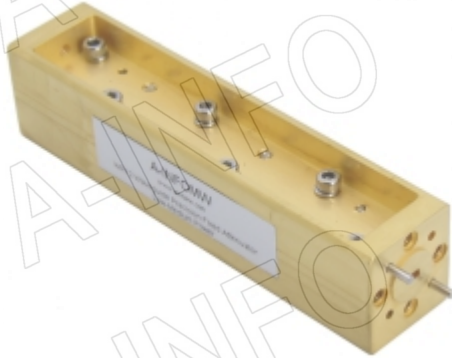


EIA WR	WR12
Frequency Range(GHz)	60.0 - 90.0
Attenuation(dB)	50
Attenuation Accuracy(dB)	±1.3 Max.
Attenuation Sensitivity(dB)	±0.9 Max.
VSWR	1.20:1 Max.
Average Power(W CW)	0.4
Peak Power(KW)	0.03
Flange	FUGP740(UG-387/U)
Material	Cu
Finish	Gold Plated
Size(mm)	88.9 x 19.1 x 20.7
Net Weight(Kg)	0.16 Around

Outline Drawing (Size: mm)

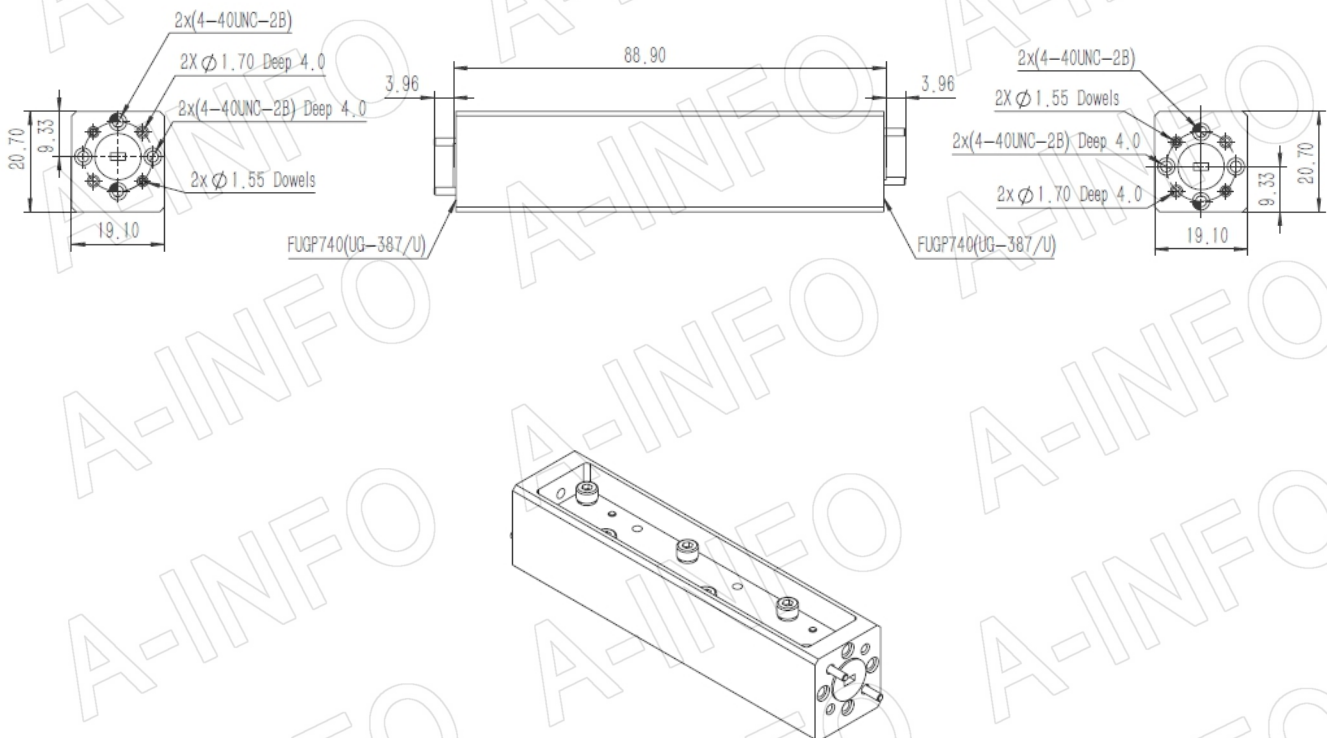

Flange Drawing (Size: mm)

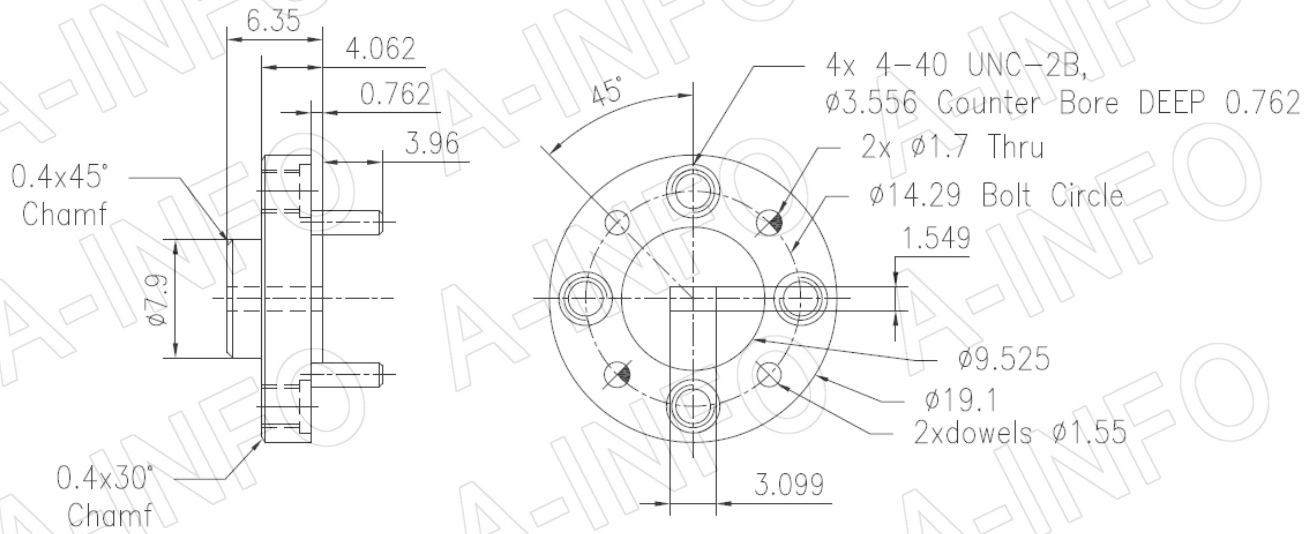


FUGP740
(equivalent to UG-387/U)

Test Results

Attenuation

Max: -49.439 dB Min: -50.808 dB Mean: -50.207 dB

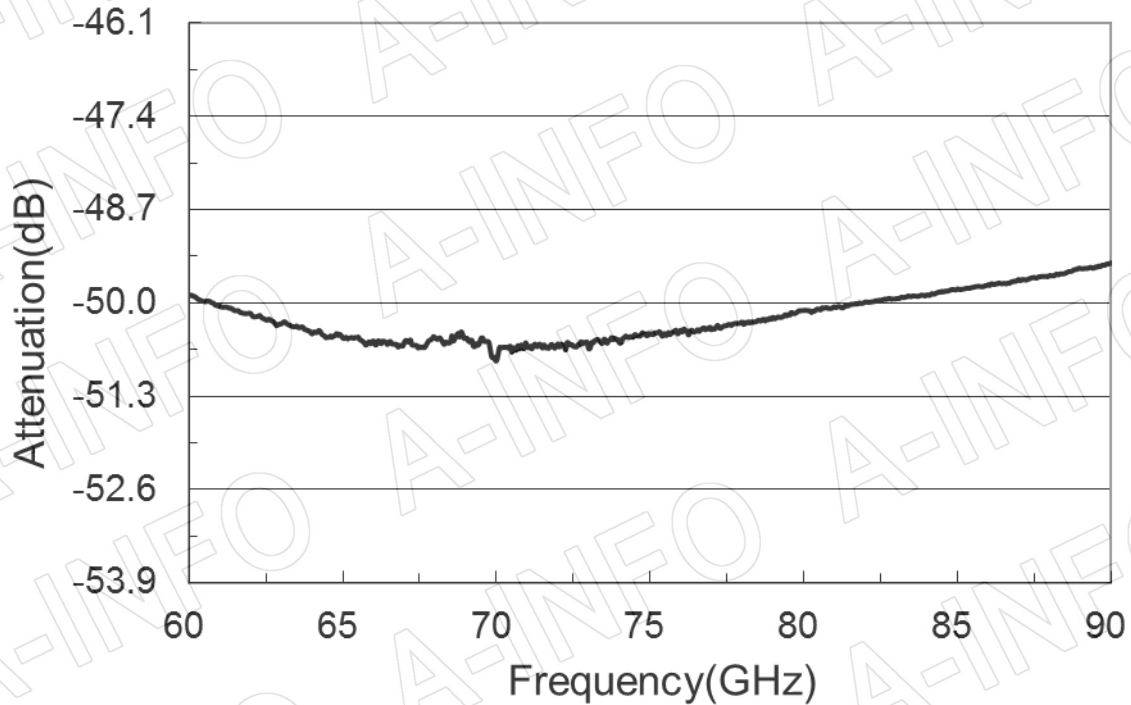

VSWR

— Port1 — Port2
Port1 Max: 1.096 Port2 Max: 1.103

