





For reference only. See data sheet for the detailed specifications.

Technical Specification

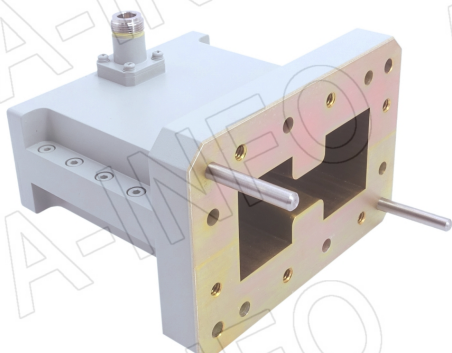

EIA WRD	WRD150
Frequency Range(GHz)	1.5 - 3.6
Insertion Loss(dB)	0.25 Max.
VSWR	1.30:1 Max.
Flange	FPWRD150
Connector	N-Female
Average Power(W CW)	500 Max.
Peak Power(KW)	3
Material	Al
Size(mm)	118.1 x 138.2 x 102.1
Net Weight(Kg)	1.30 Around

Outline Drawing (Size: mm)

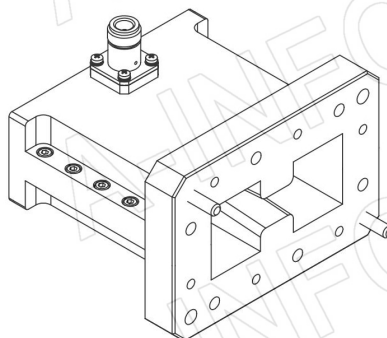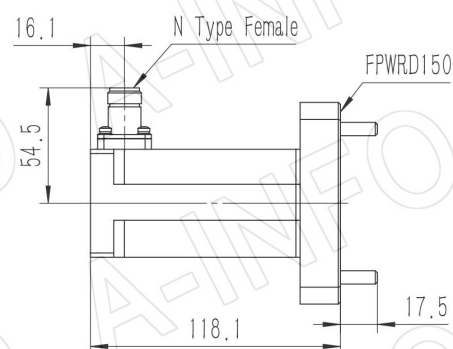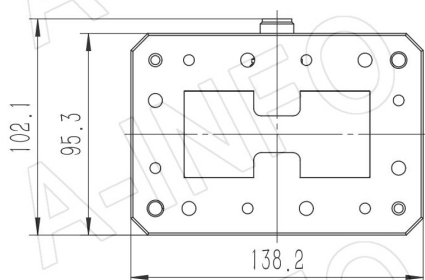

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

Page 1 of 3


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)


FPWRD150

(With ten through mounting holes
and six screws holes)

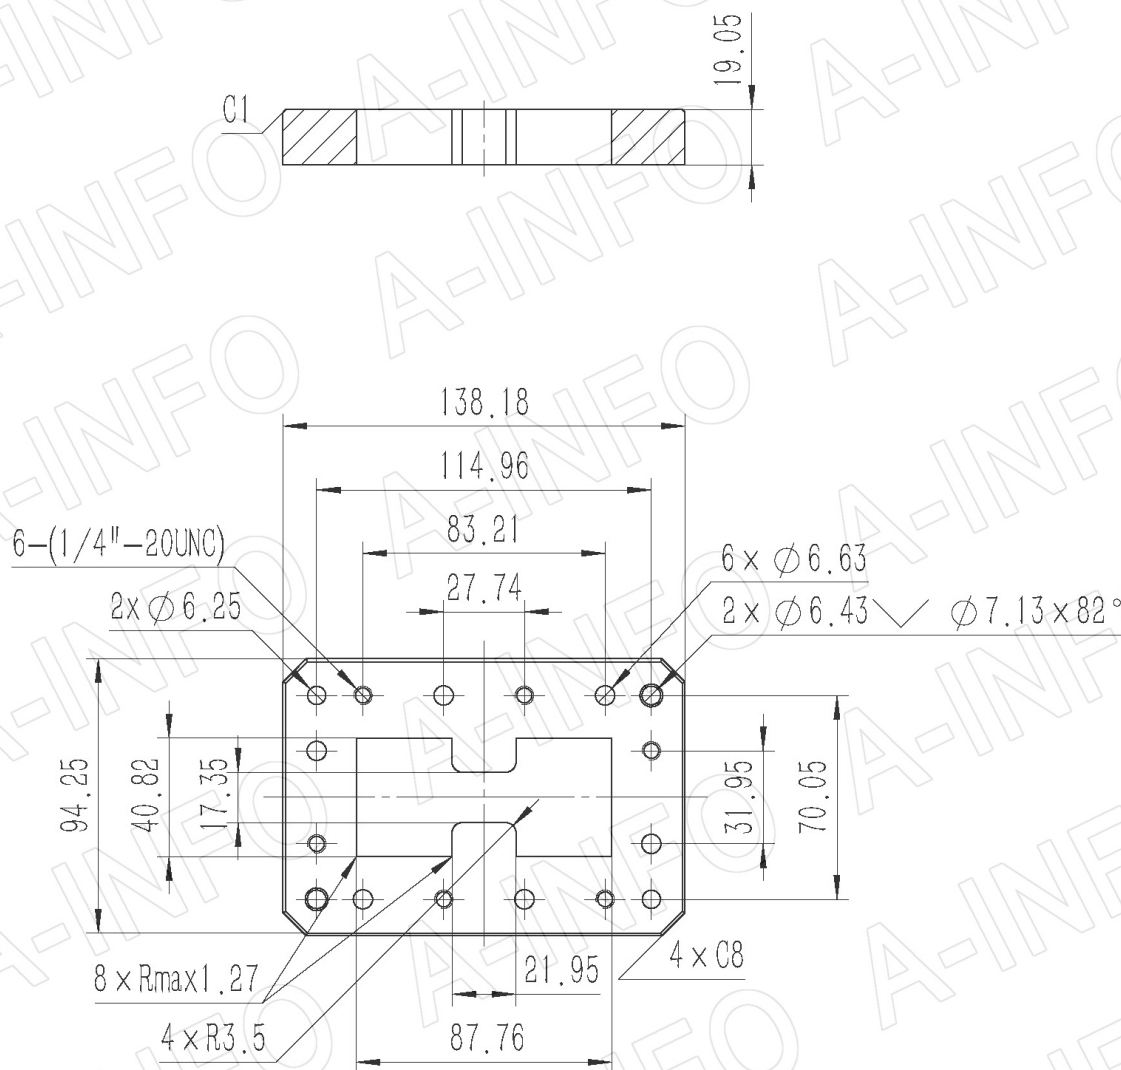

Test Results

I. L. (Test with two adapters back to back)

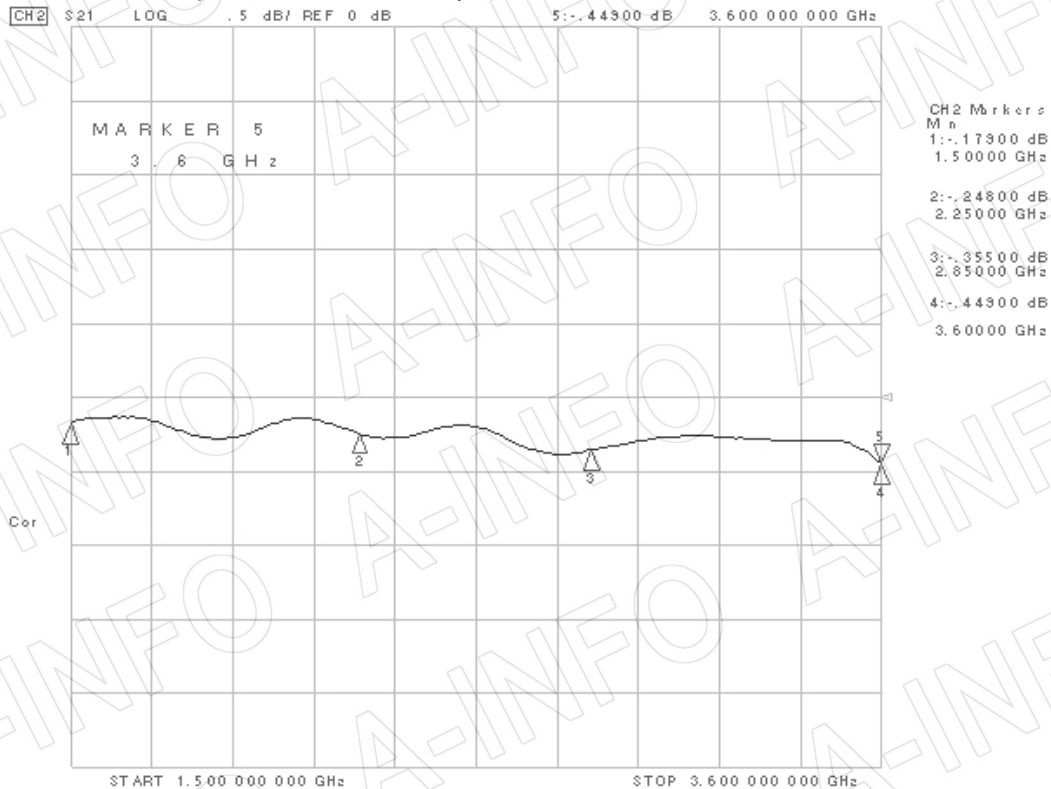

VSWR

