


For reference only. See data sheet for the detailed specifications.

Technical Specification




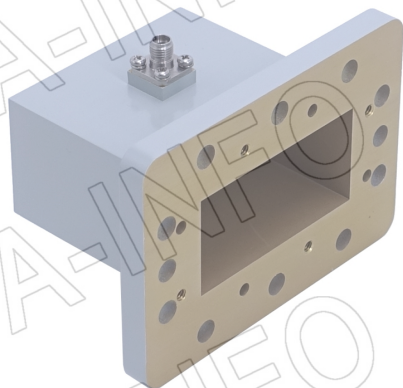


EIA WR	WR229
Frequency Range(GHz)	3.3 – 4.9
Insertion Loss(dB)	0.16 Max.
VSWR	1.25:1 Max.
Flange	APF229
Connector	3.5mm-Female
Average Power(W CW)	50 Max.
Peak Power(KW)	0.1
Material	Al
Finish	Chemical Conversion Coating, Gray Paint
Size(mm)	65 x 98.4 x 69.9
Net Weight(Kg)	0.24 Around


Outline Drawing (Size: mm)

3.5mm-Female Output (P/N: 229WCA3.5_P0)

For 3.5mm-Male output outline drawing, please contact A-INFO.

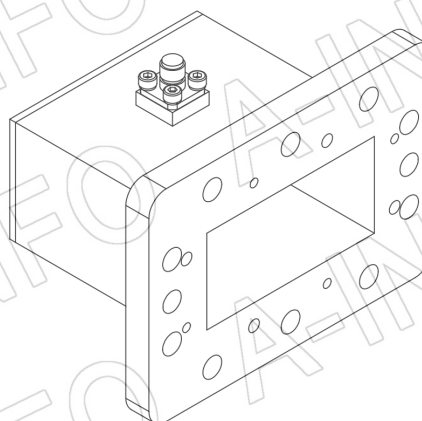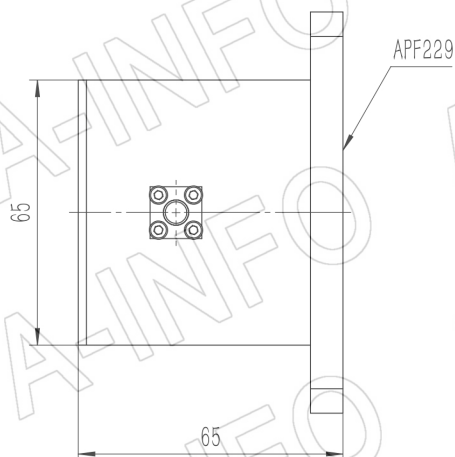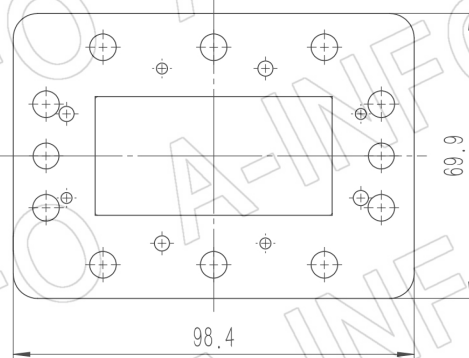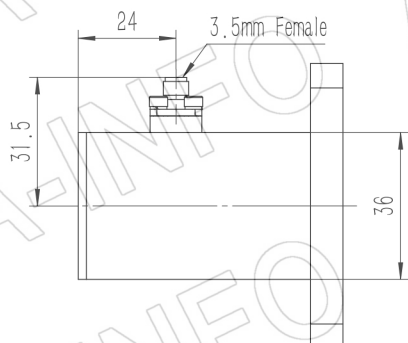


Flange Drawing (Size: mm)

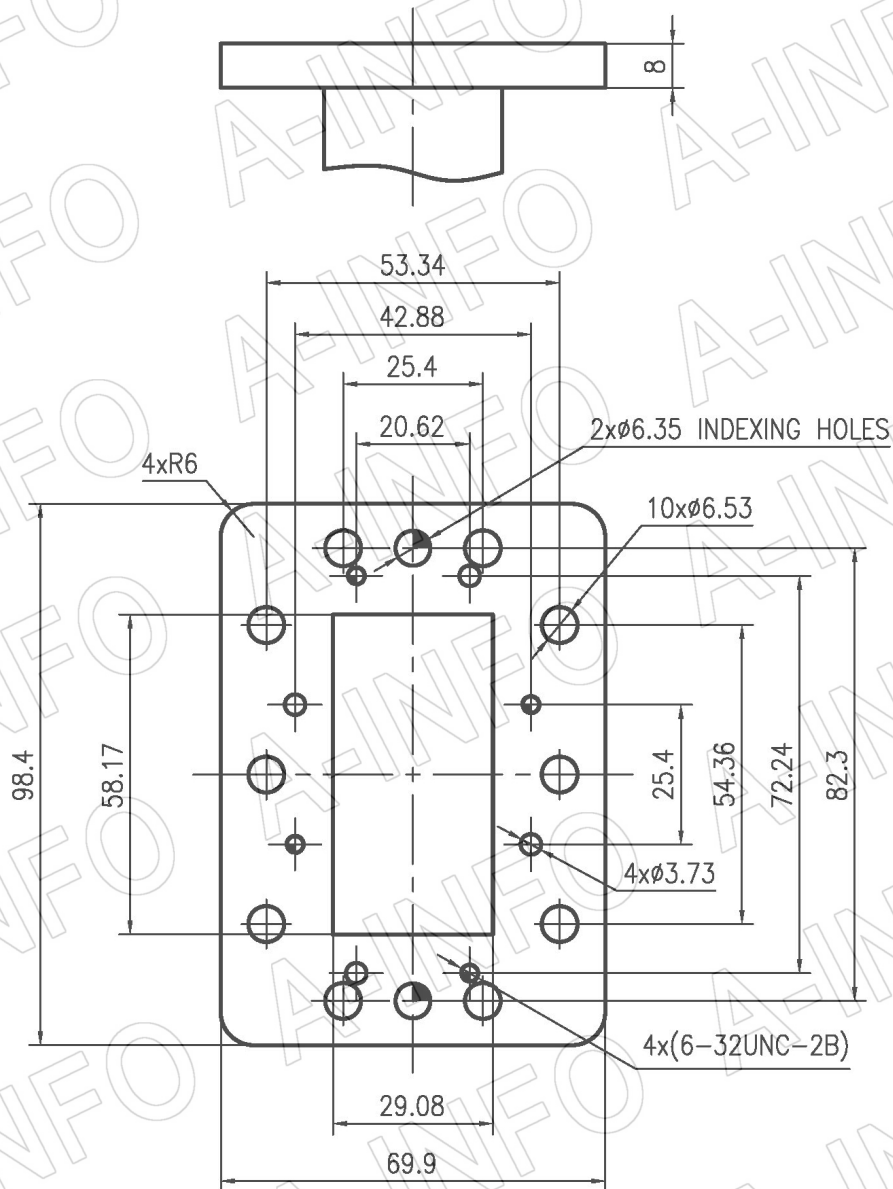

APF229

Test results

I.L. (Test with two adapters back to back)

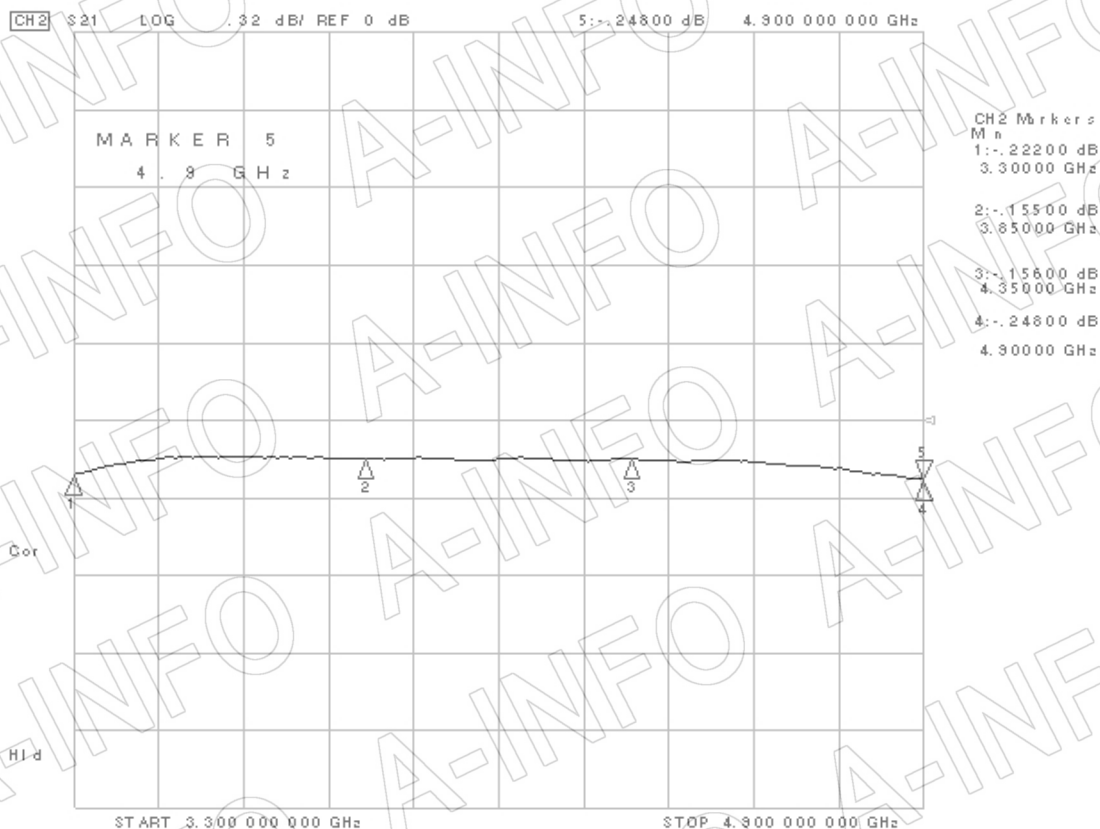

VSWR

