


For reference only. See data sheet for the detailed specifications.

Technical Specification




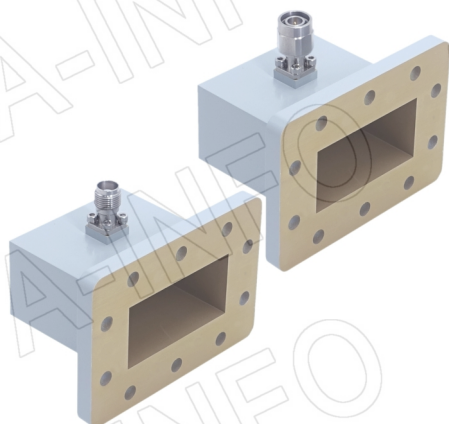


EIA WR	WR229
Frequency Range(GHz)	3.3 – 4.9
Insertion Loss(dB)	0.14 Max.
VSWR	1.25:1 Max.
Flange	FDP40(UDR40)
Connector	TNC-Female or TNC-Male
Average Power(W CW)	150 Max.
Peak Power(KW)	3
Material	Al
Size(mm)	65 x 98.4 x 75.9
Net Weight(Kg)	0.19 Around

Outline Drawing (Size: mm)

TNC-Female Output (P/N: 229WCAT)

For TNC-Male output outline drawing, please contact A-INFO.

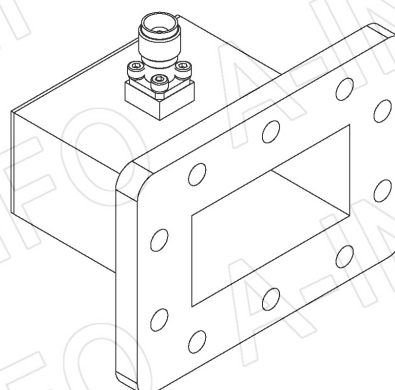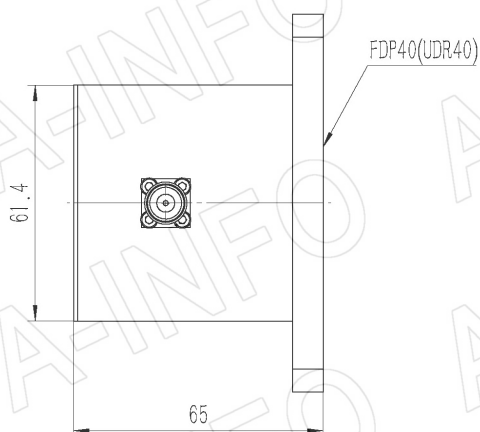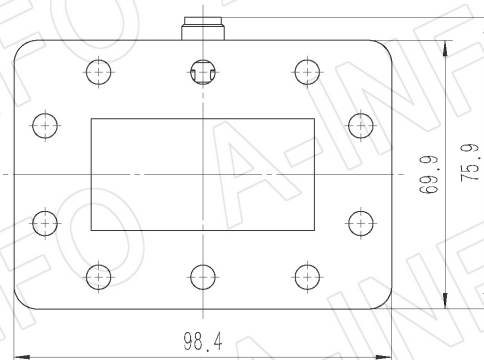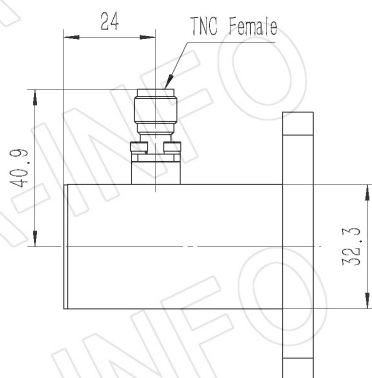

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 1 of 3

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Flange Drawing (Size: mm)

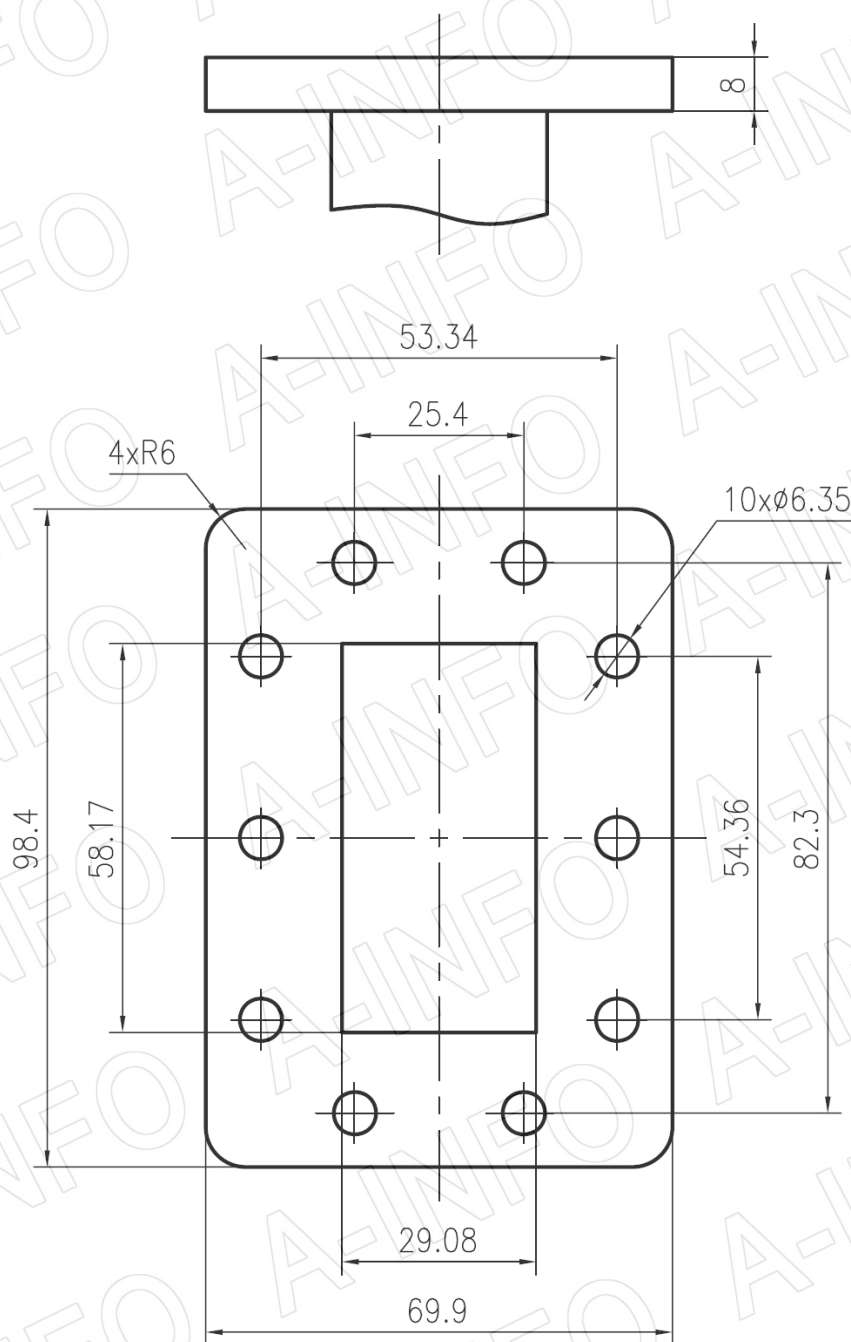

FDP40

Test Results

Insertion Loss (Test with two adapters back to back)

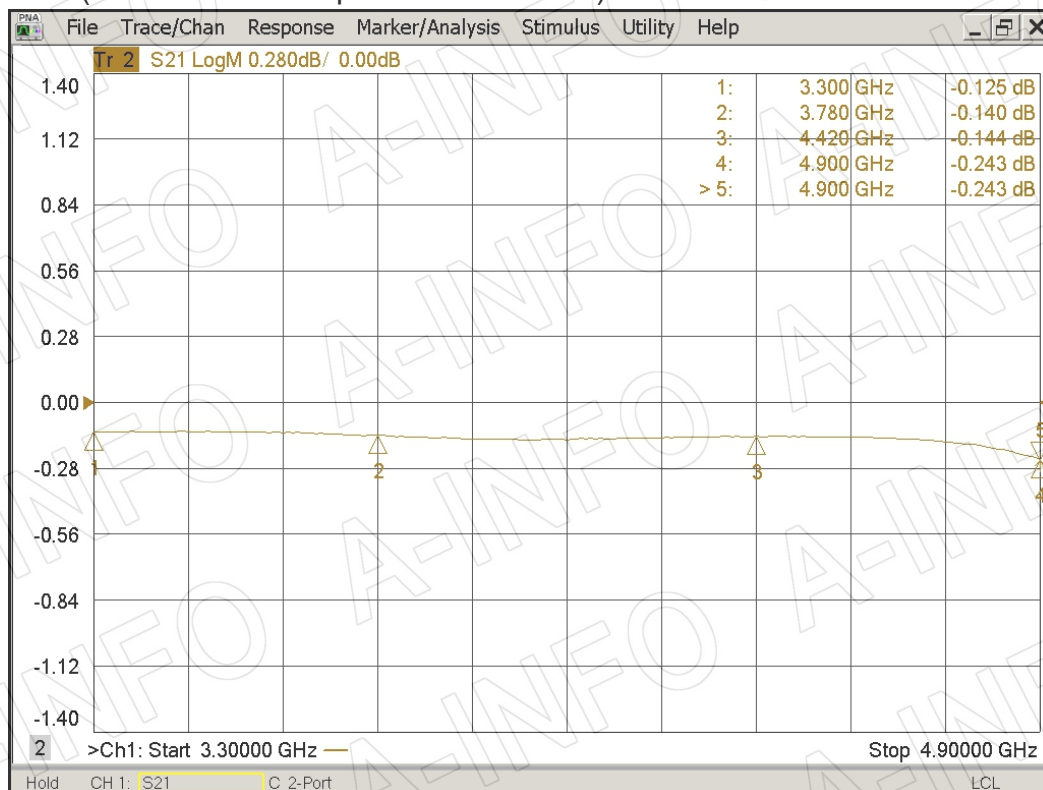

VSWR

