



Technical Specification

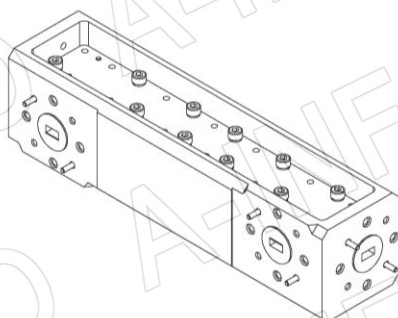


EIA WR	WR22
Frequency Range(GHz)	33.0 - 50.0
Coupling(dB)	40
Coupling Accuracy(dB)	±1.0 Max.
Frequency Sensitivity(dB)	±0.9 Max.
Directivity(dB)	30 Min.
Insertion Loss(dB)	0.3 Max. (Not including the theoretical loss 8.69×10^{-4} dB)
Mainline VSWR	1.15:1 Max.
Secondline VSWR	1.20:1 Max.
Flange	FUGP400(UG-383/U)
Material	Cu
Size(mm)	139.7 x 34.5 x 34.95
Net Weight(Kg)	0.84 Around

Outline Drawing (Size: mm)

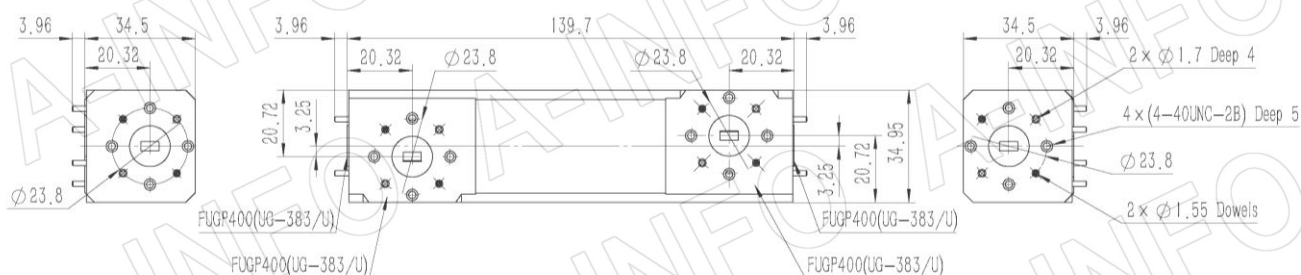

Flange Drawing (Size: mm)

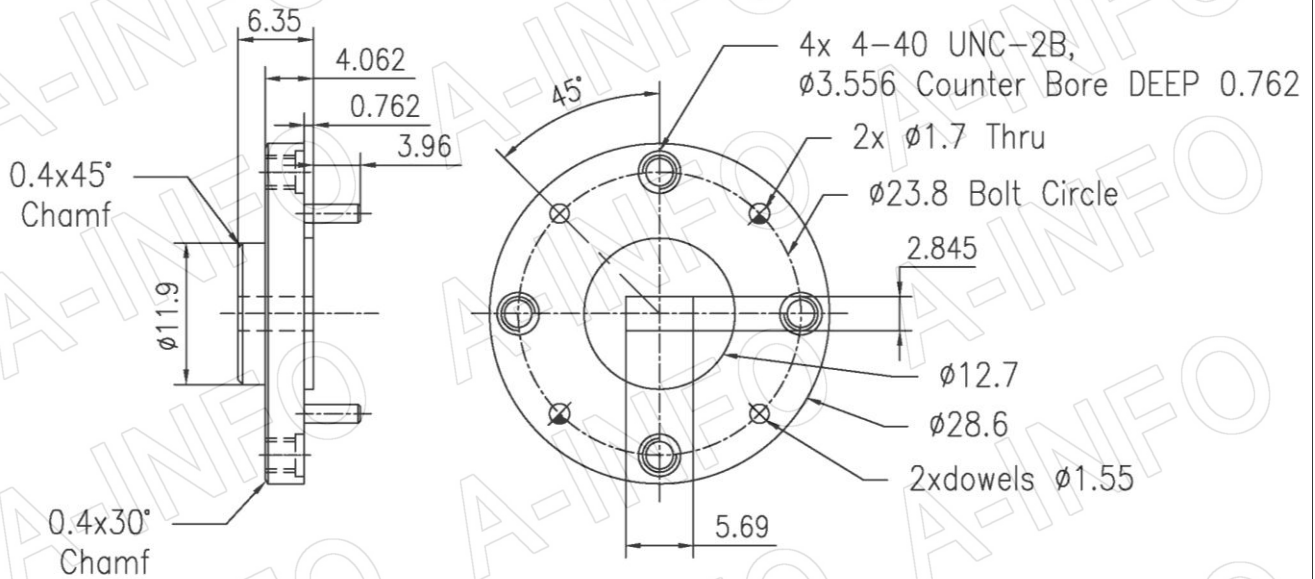

FUGP400
(equivalent to UG-383/U)

AINFO Inc.

Page 2 of 6


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results


Coupling Port 1

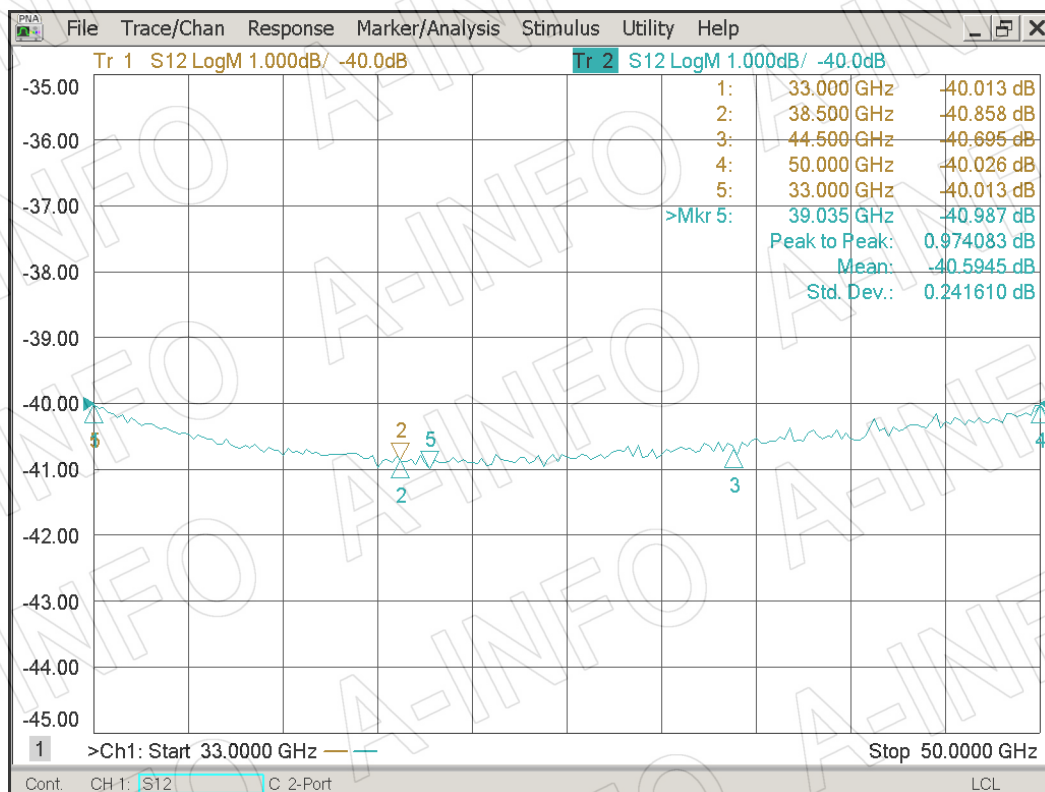


Port 2

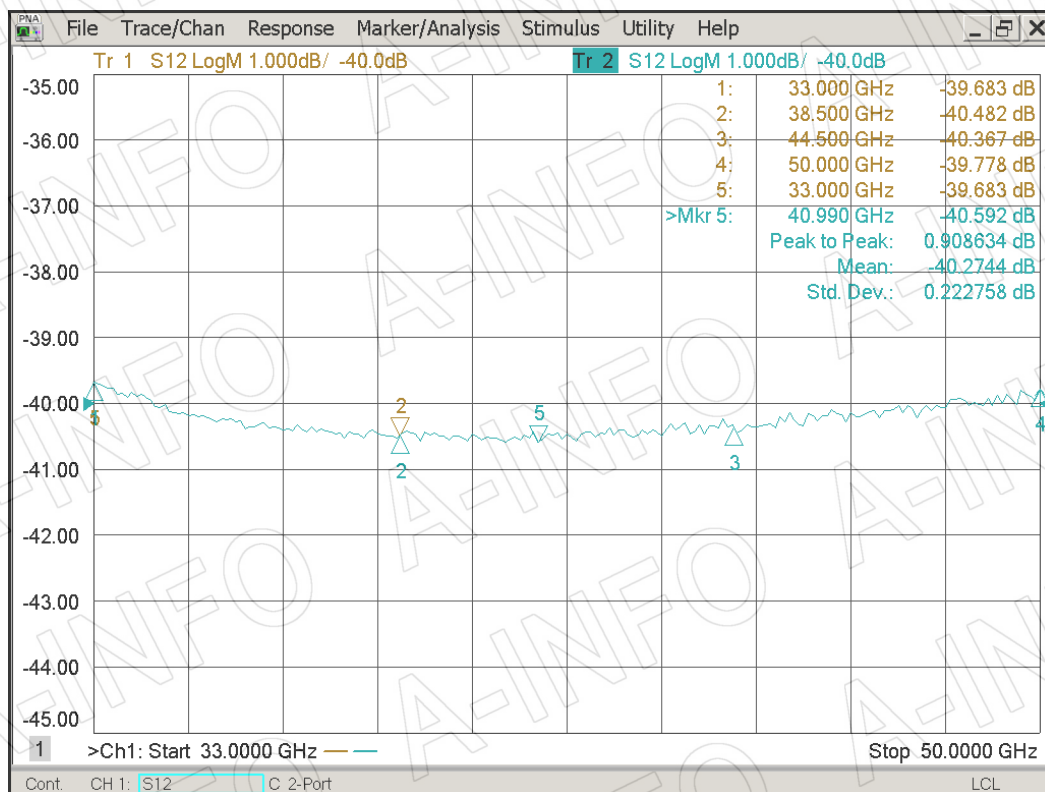


Directivity Port 1

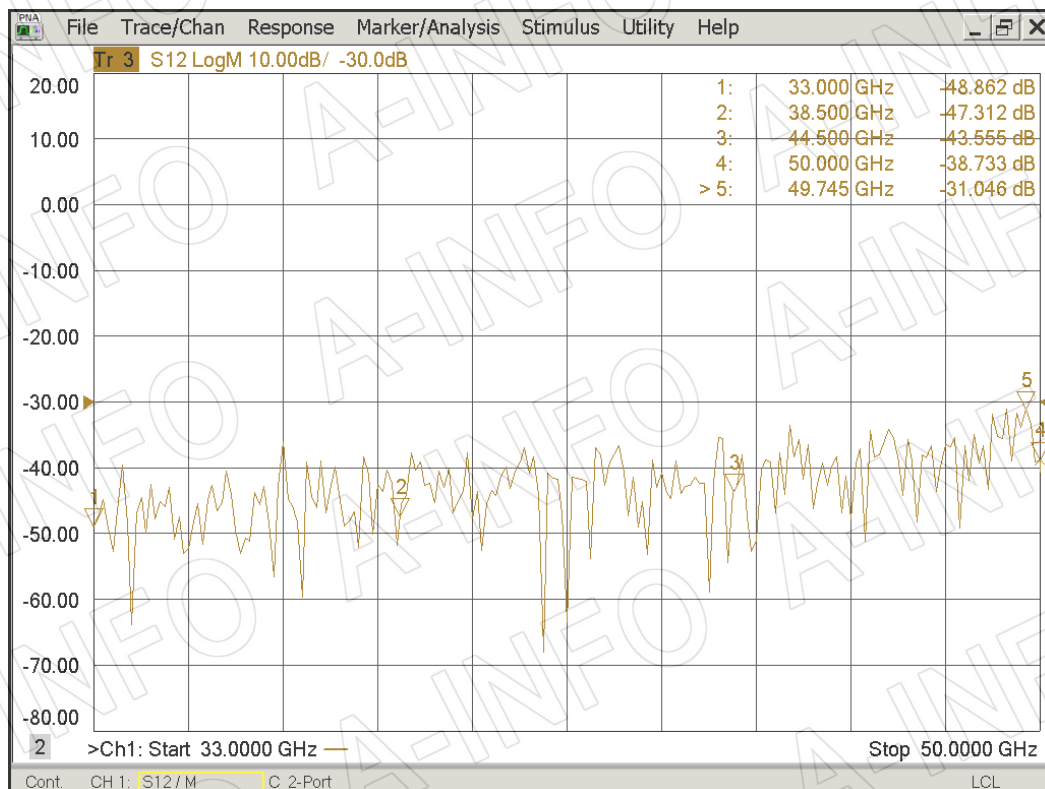


Port 2

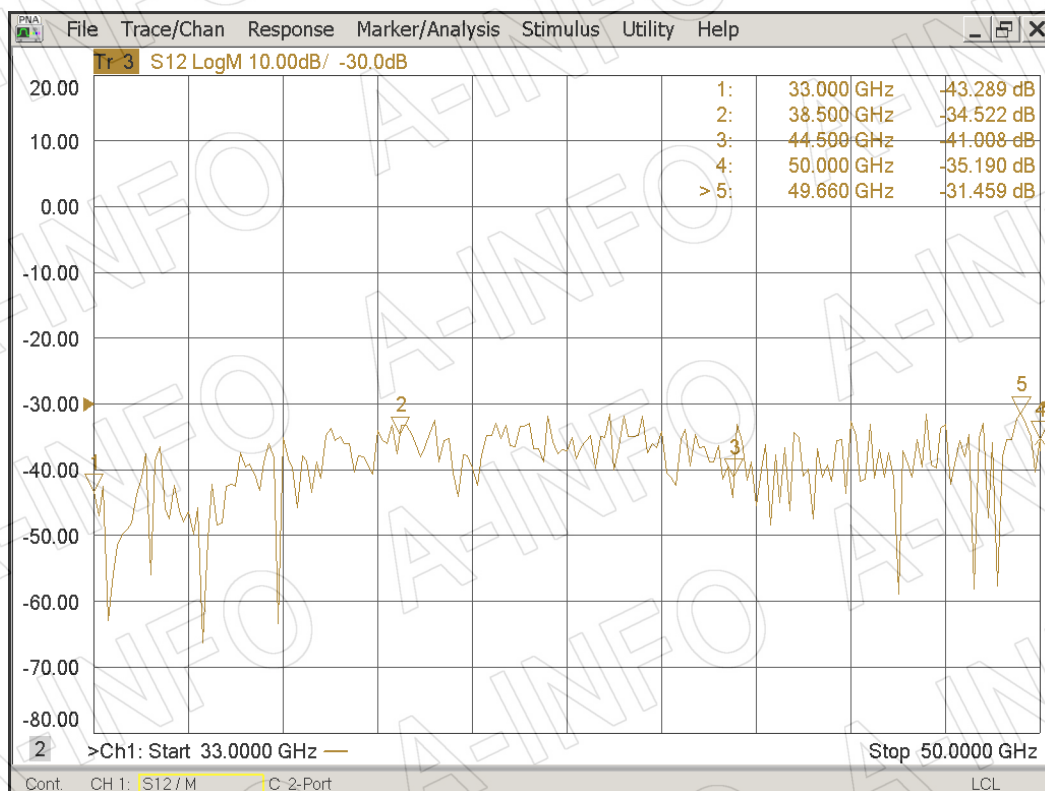

I.L. (Including the theoretical loss 8.69×10^{-4} dB)

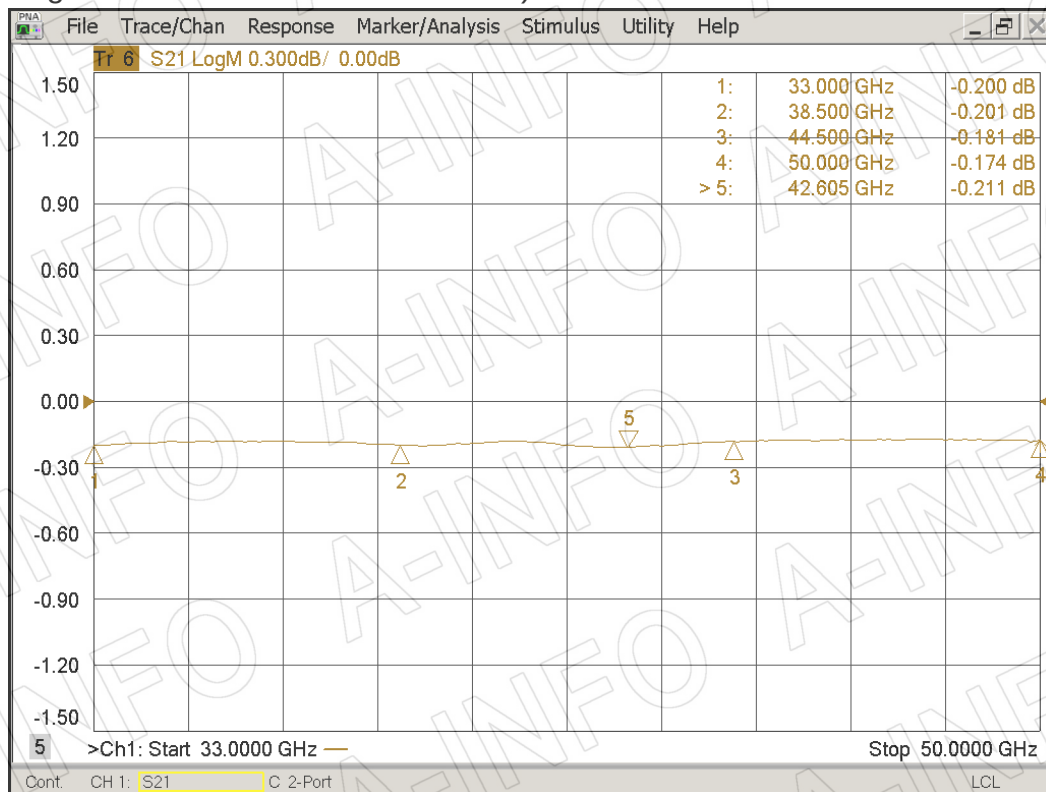

Mainline VSWR

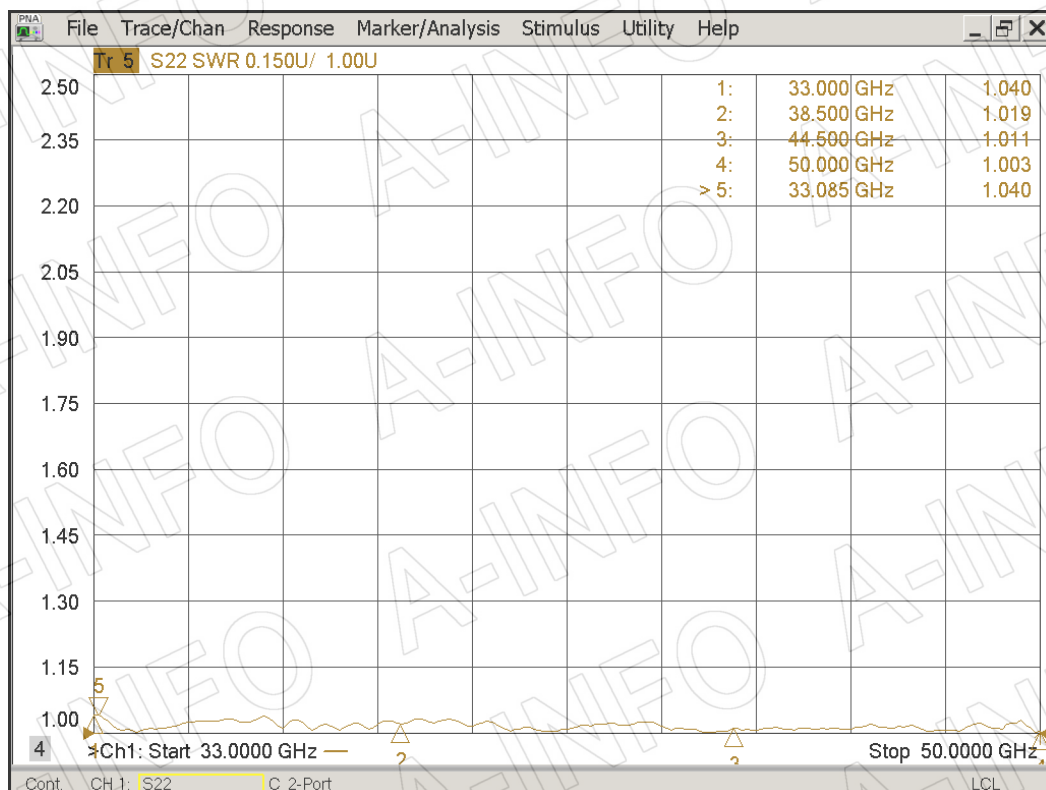

AINFO Inc.

Page 5 of 6

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Secondline VSWR

Port 1

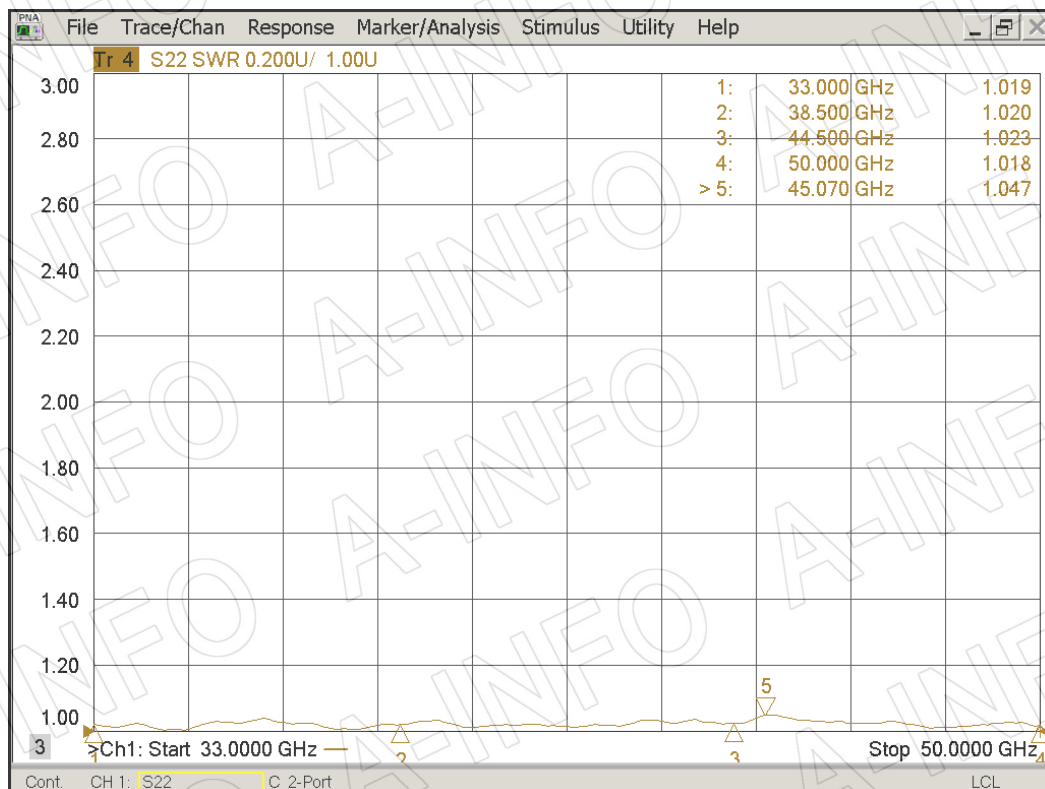

Port 2

