


For reference only. See data sheet for the detailed specifications.

Technical Specification



EIA WR	WR284
Frequency(GHz)	2.75 – 3.10
Insertion Loss(dB)	0.25 Max.
Isolation(dB)	20 Min.
VSWR	1.25:1 Max.
Power Handling(W CW)	1200
Peak Power(KW)	25
Flange	FDP32(UDR32) (With 10XM6 D15 threaded holes)
Material	Al
Size(mm)	160 x 146 x 76.2
Net Weight(Kg)	2.3 Around

Outline Drawing (Size: mm)

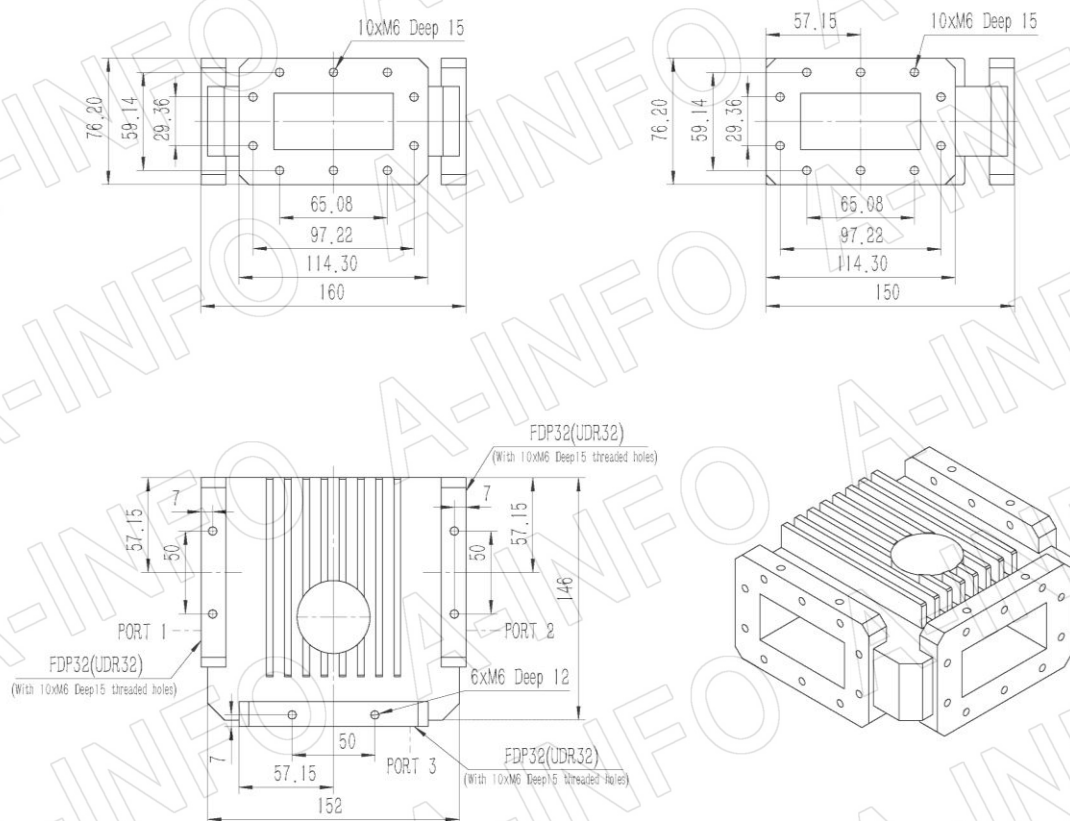

AINFO Inc.


Page 1 of 4

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Flange Drawing (Size: mm)

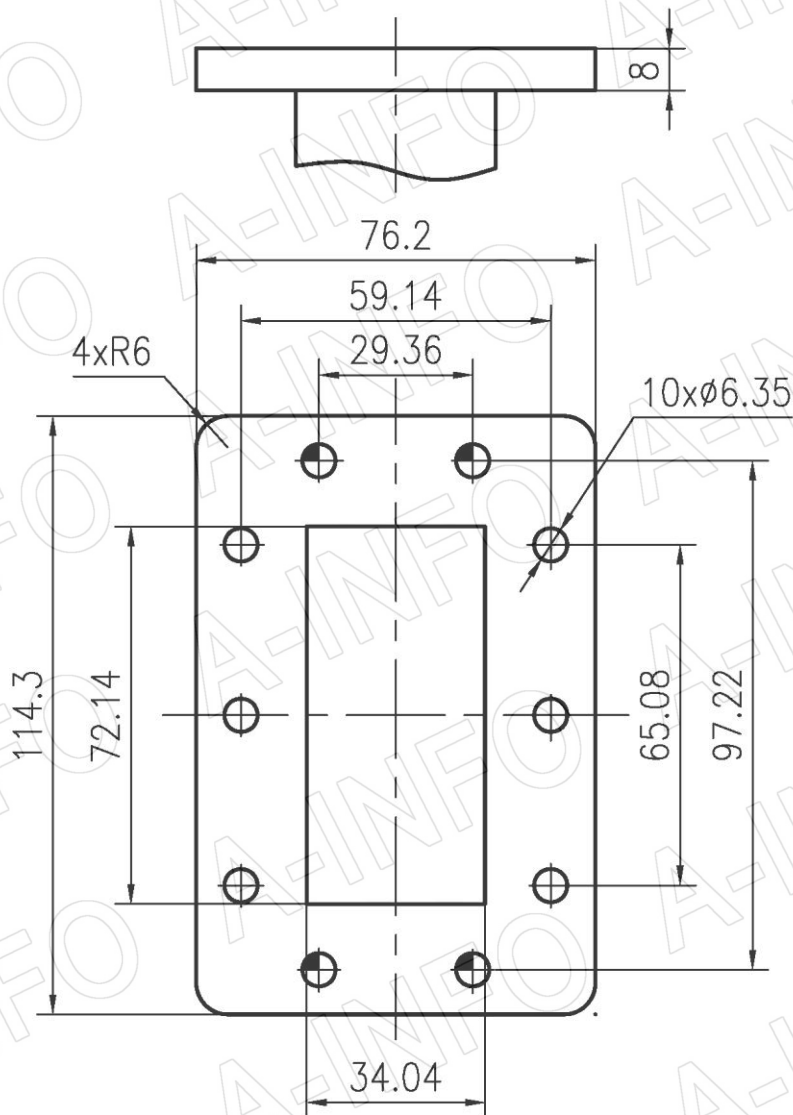


FDP32

Test Results

Port1 - Port2: I.L., Isolation & VSWR

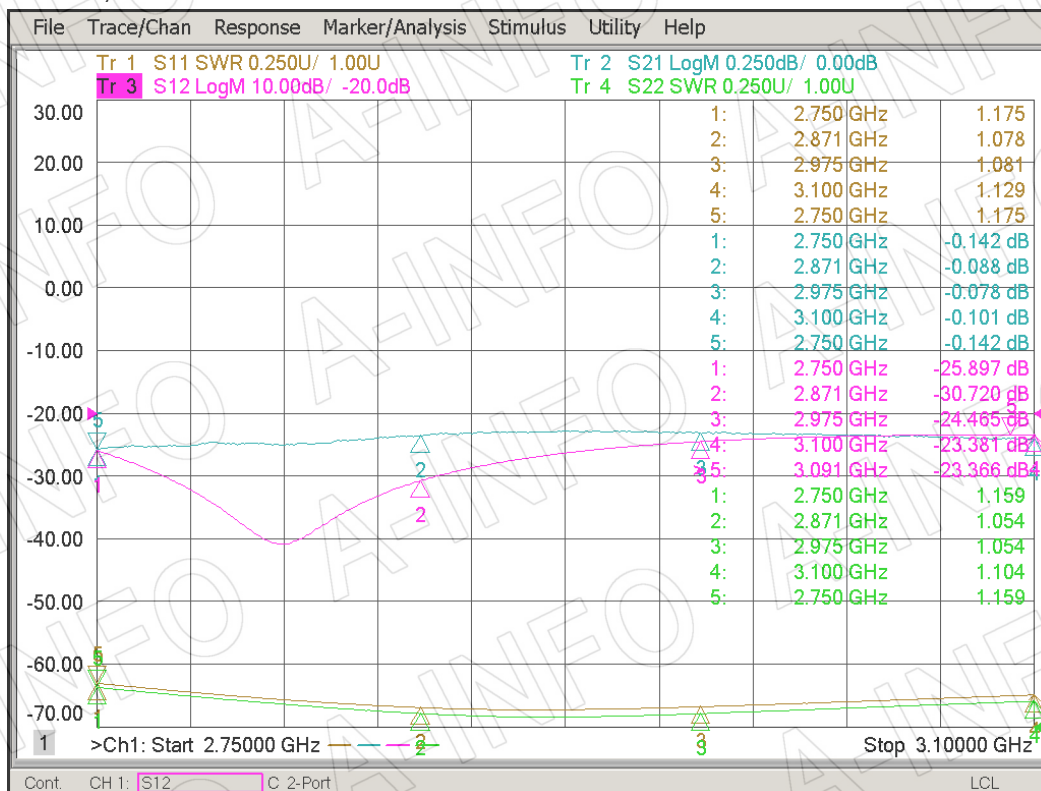

Port2 - Port3: I.L., Isolation & VSWR

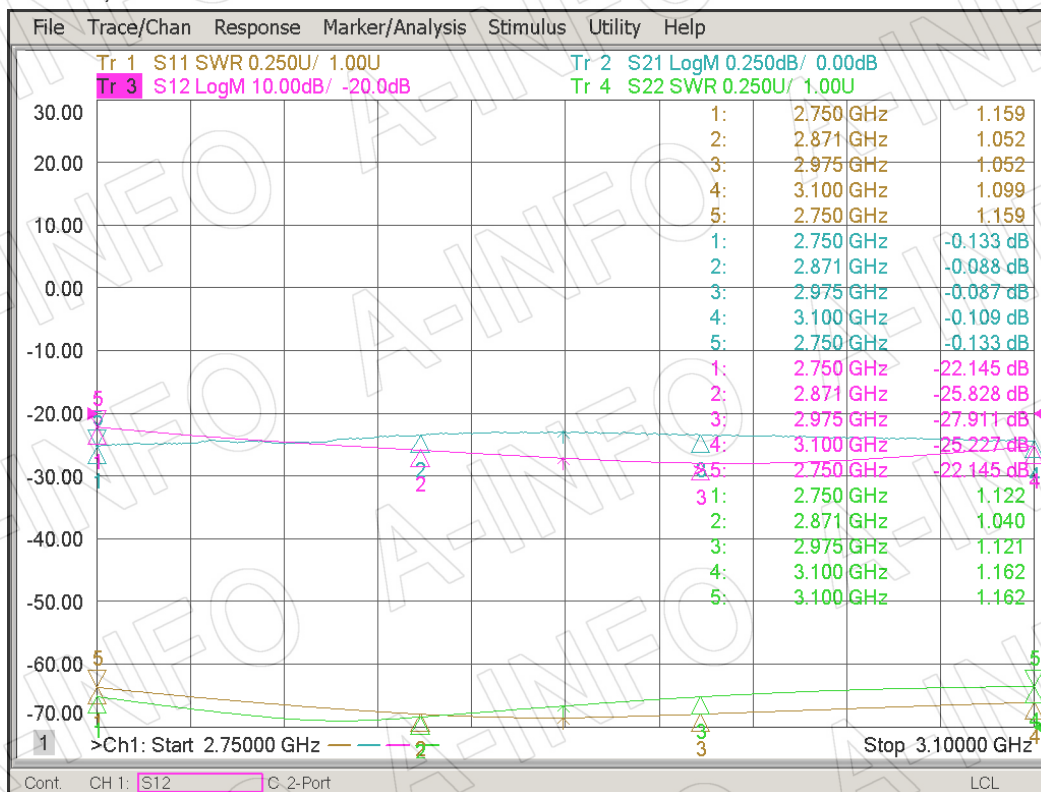

Port3 - Port1: I.L., Isolation & VSWR

