




For reference only. See data sheet for the detailed specifications.

Technical Specification

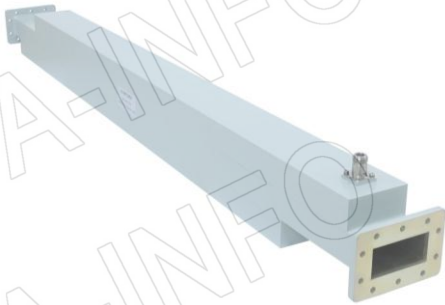

EIA WR	WR284
Frequency Range(GHz)	2.60 – 3.95
Coupling(dB)	40
Coupling Accuracy(dB)	±0.9 Max.
Frequency Sensitivity(dB)	±0.7 Max.
Directivity(dB)	30 Min.
Insertion Loss(dB)	0.2 Max. (Not including the theoretical loss 8.69×10^{-4} dB)
Mainline VSWR	1.05:1 Max.
Secondline VSWR	1.25:1 Max.
Flange	FDP32(UDR32)
Coupling Port	N-Female
Material	Al
Size(mm)	1168.4 x 114.3 x 167.3
Net Weight(Kg)	4.0 Around

Outline Drawing (Size: mm)

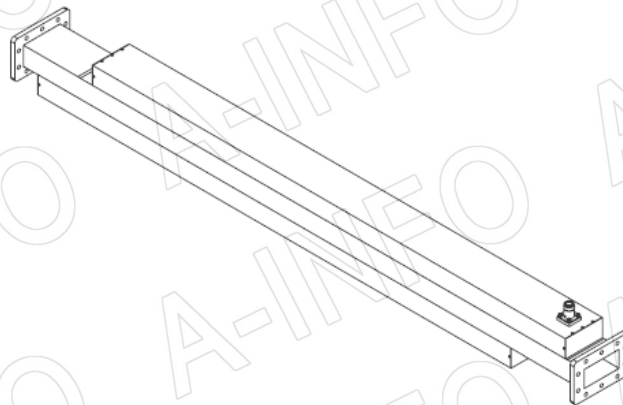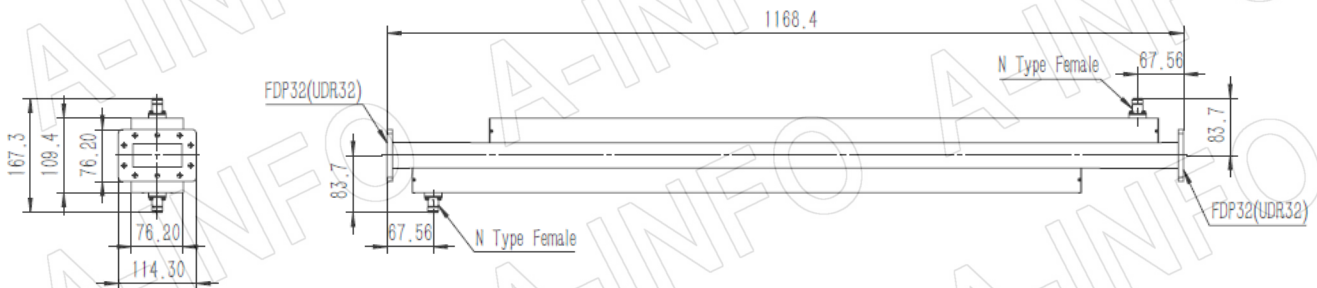

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


Page 1 of 6

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com


Flange Drawing (Size: mm)

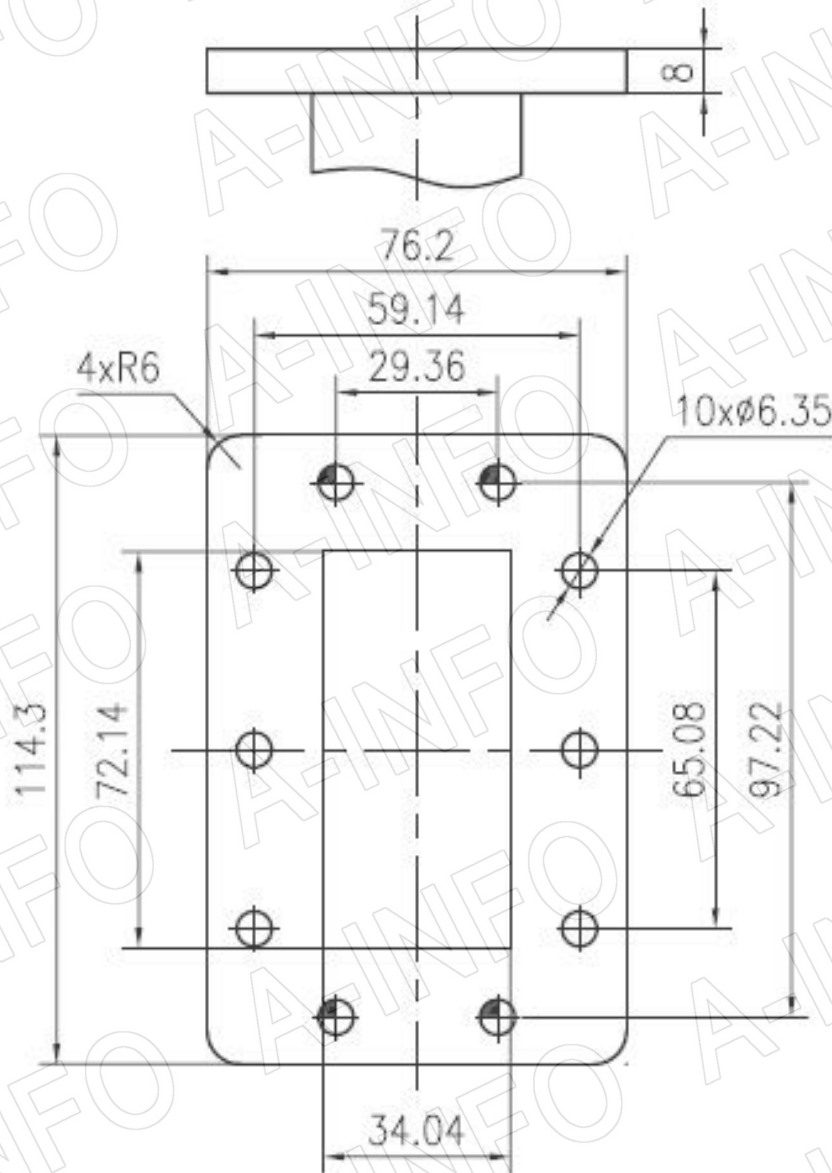


FDP32

Test Results


Coupling Port1

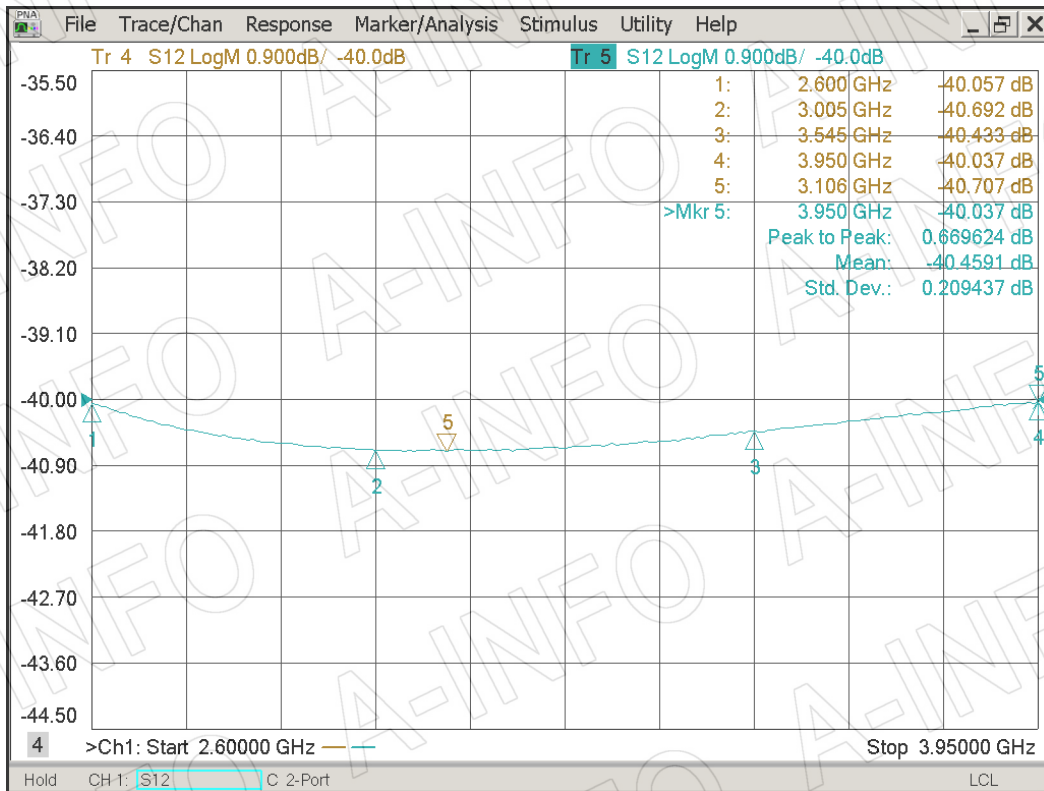


Port2

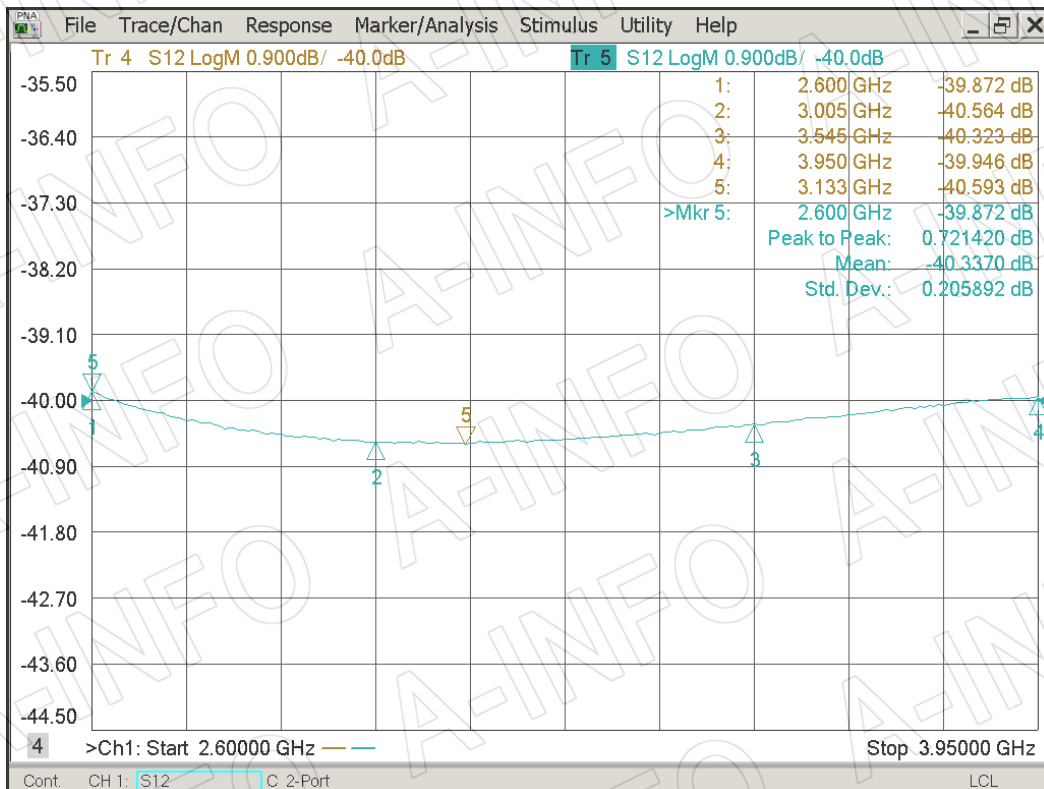


Directivity Port1

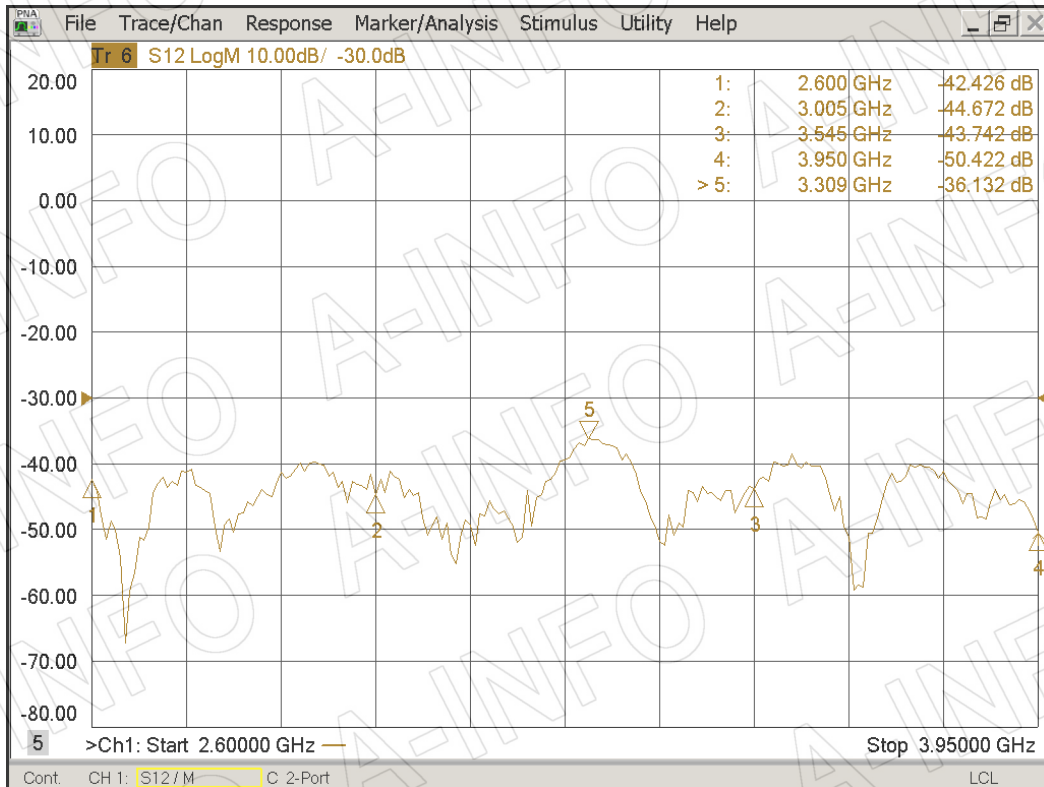


Port2

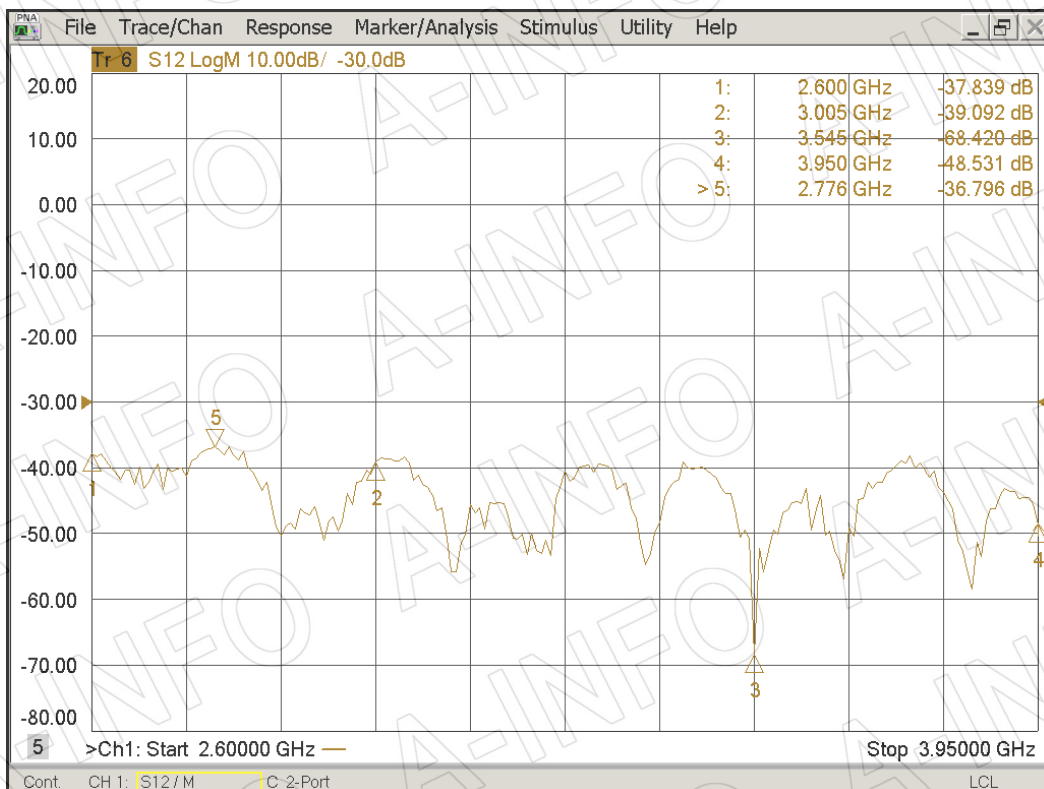

I.L. (Including the theoretical loss 8.69×10^{-4} dB)

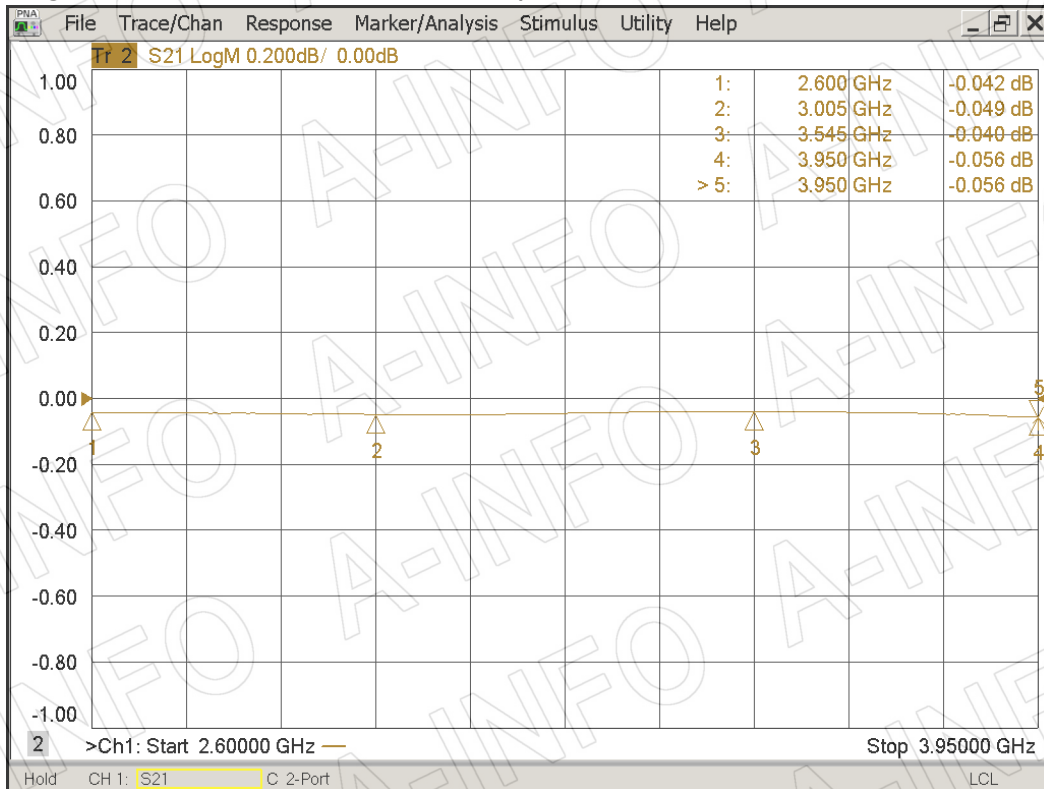


Mainline VSWR

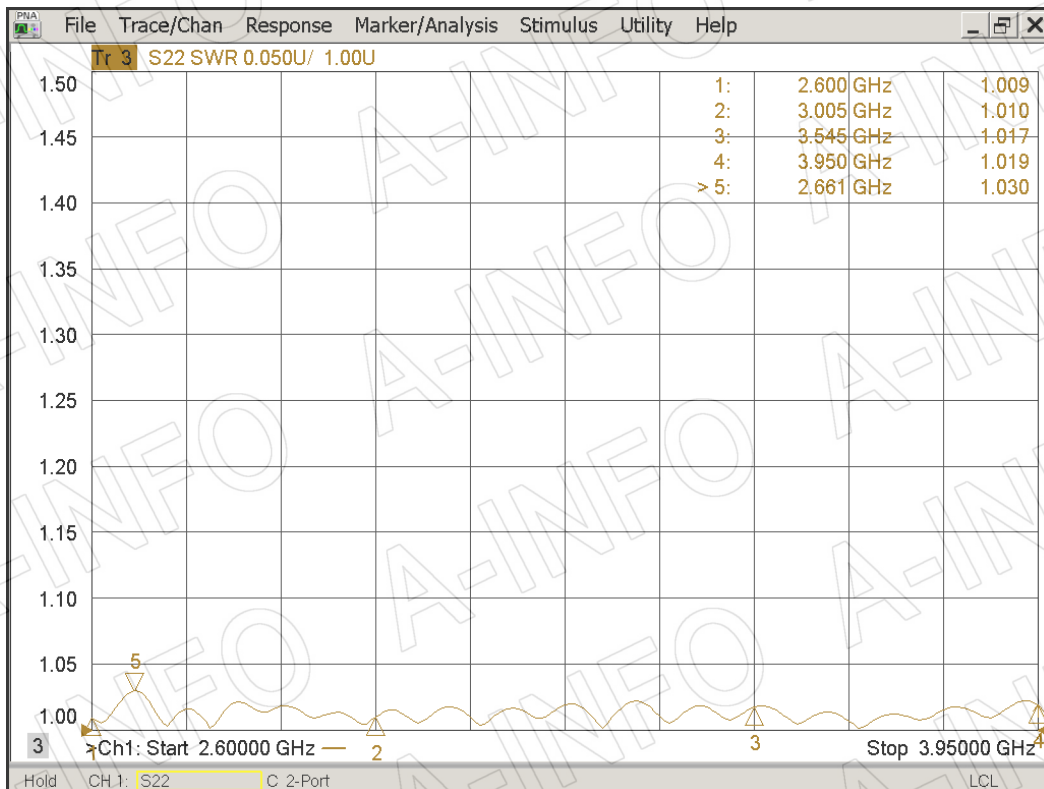

Secondline VSWR

Port1

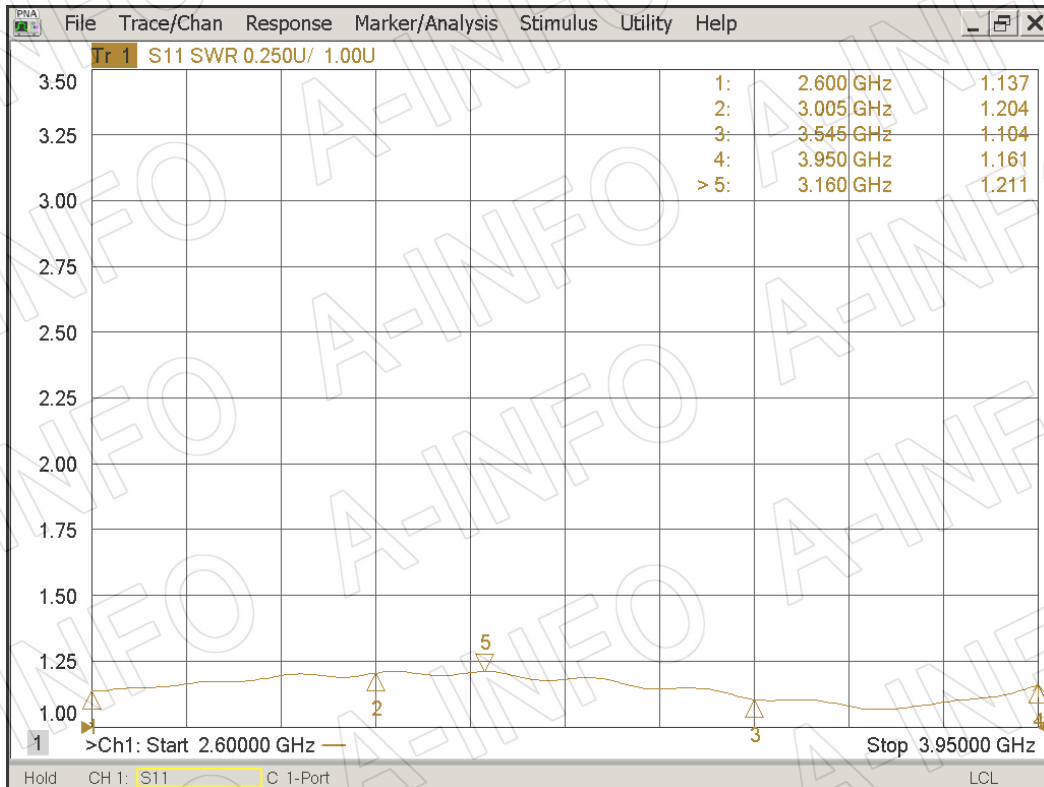

Port2

