



For reference only. See data sheet for the detailed specifications.

Technical Specification

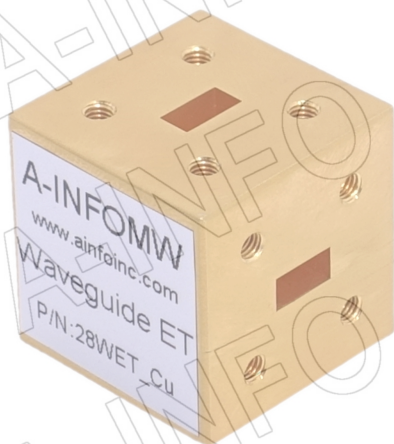

EIA WR	WR28
Frequency Range(GHz)	26.5 – 40.0
Band Width	FULL
Insertion Loss(dB)	0.5 Max. (Not including the theoretical loss 3.0dB)
VSWR	1.50:1 Typ.
Amplitude Balance(dB)	±0.3 Max.
Phase Balance(deg)	±5 Max.
Flange	FBP320(UBR320)
Material	Cu
Finish	Gold Plated
Size(mm)	25.4 x 25.4 x 25.4
Net Weight(Kg)	0.10 Around

Outline Drawing (Size: mm)

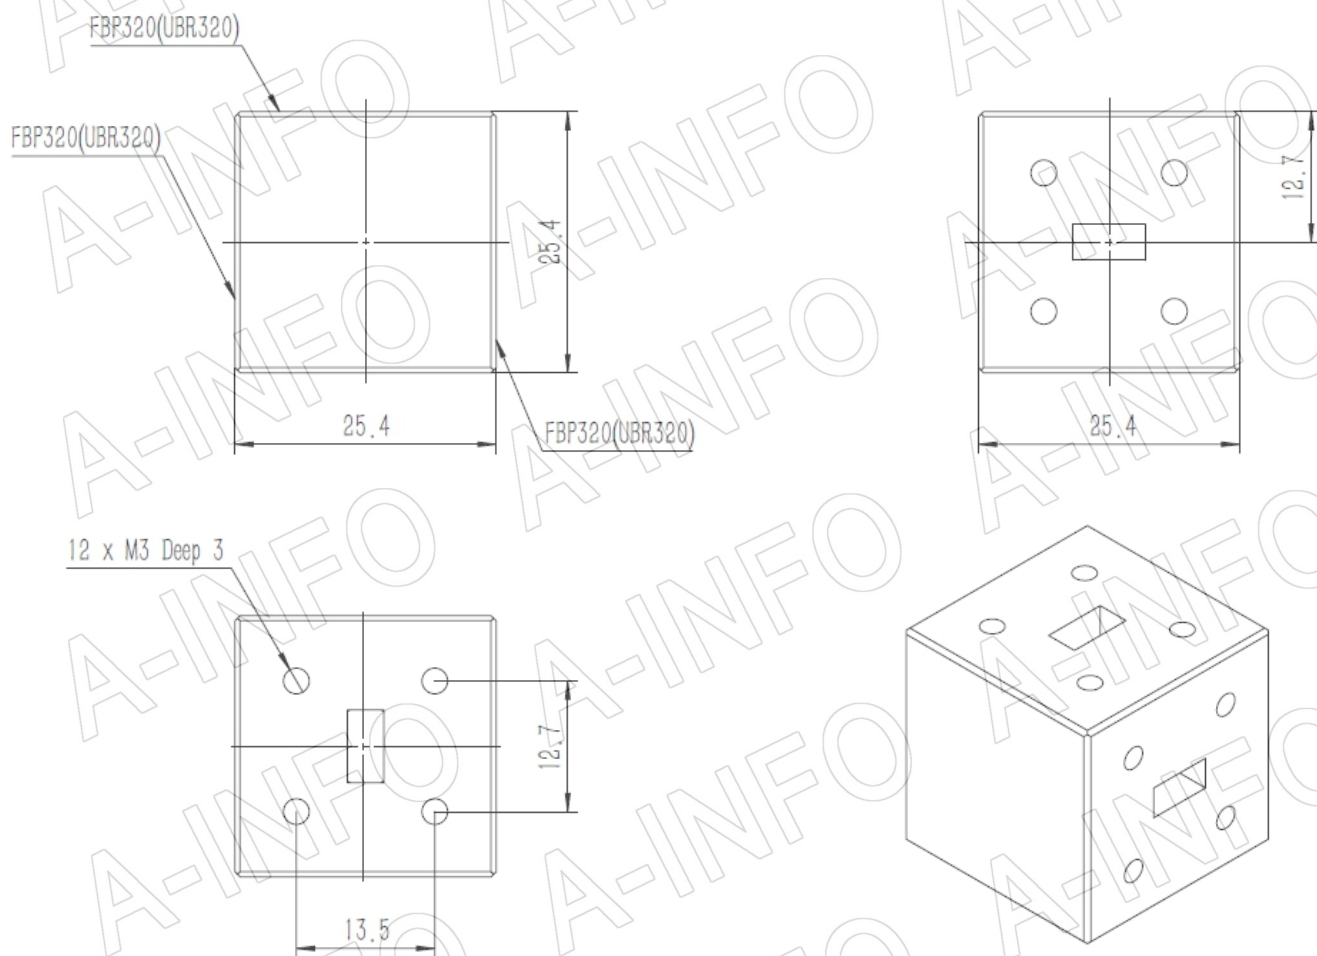

AINFO Inc.

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Page 1 of 4

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

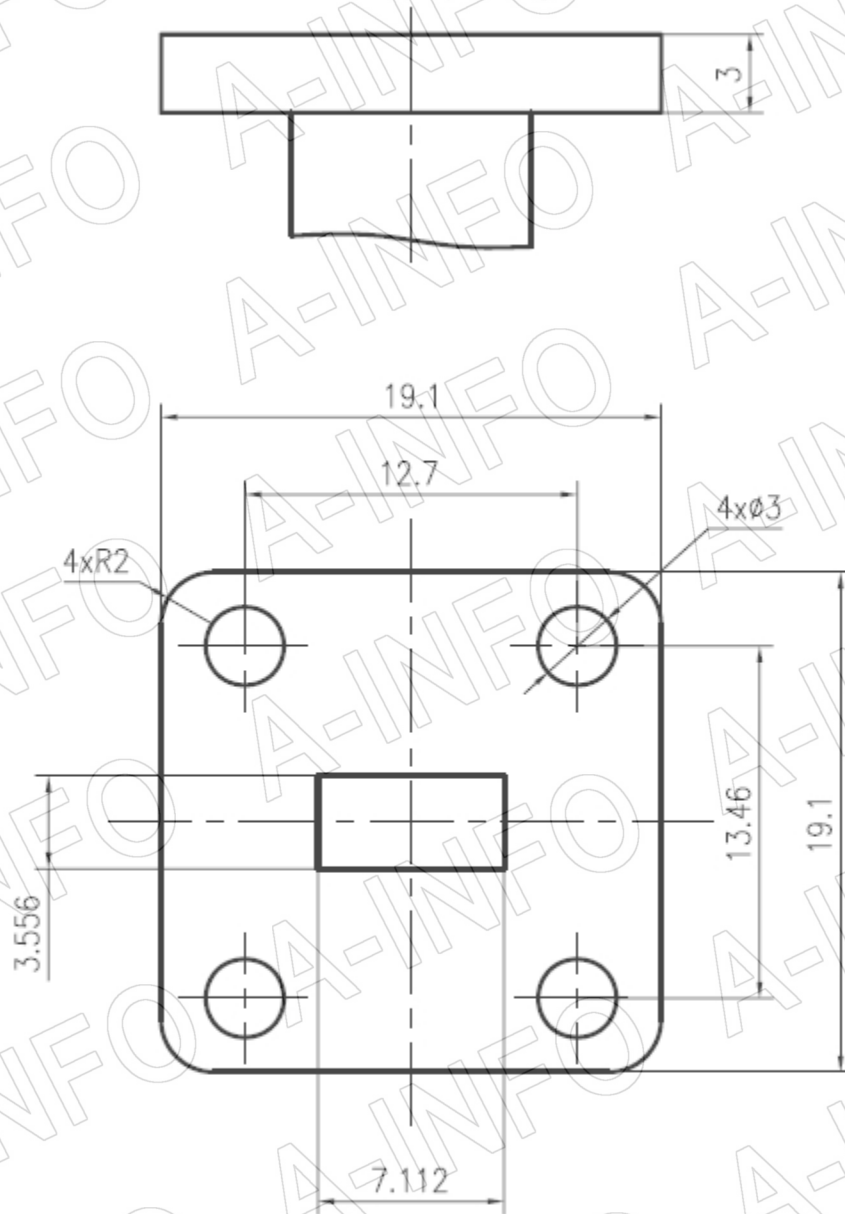

FBP320

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA : Tel: (+1) 949-639-9688,


Page 2 of 4

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

1. Insertion Loss(Including the theoretical Loss 3.0dB)

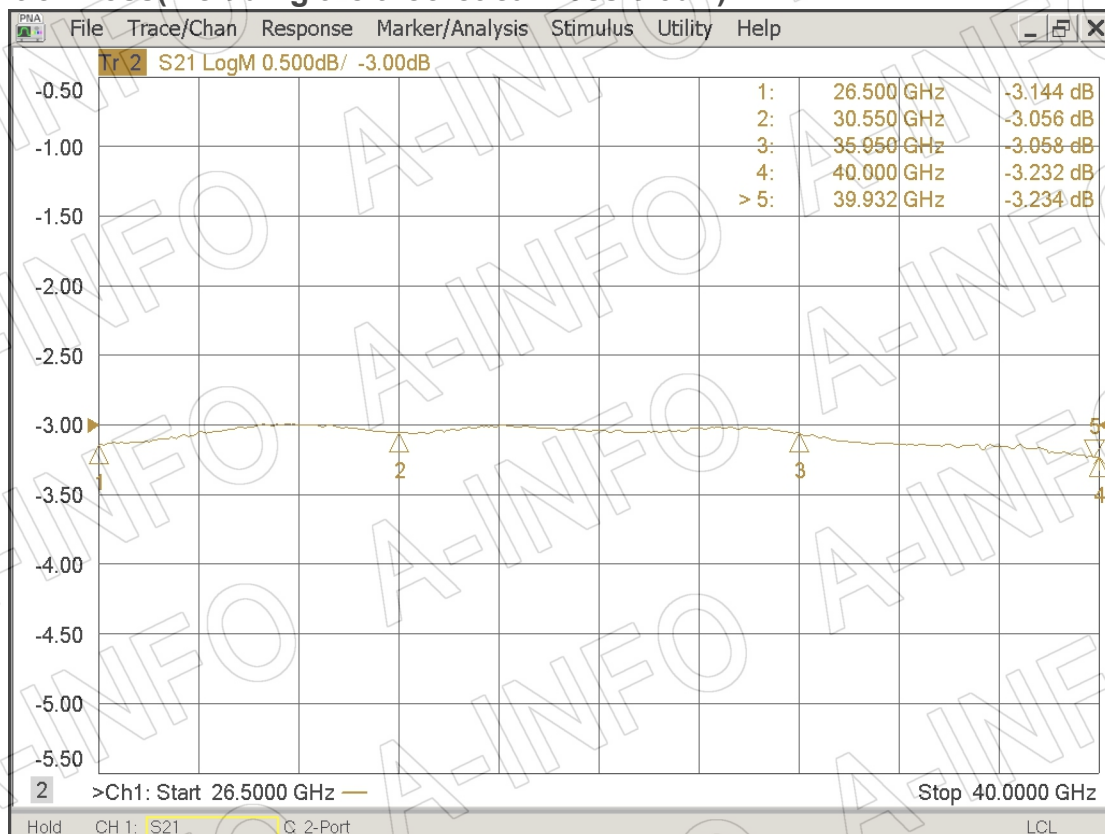

2. VSWR

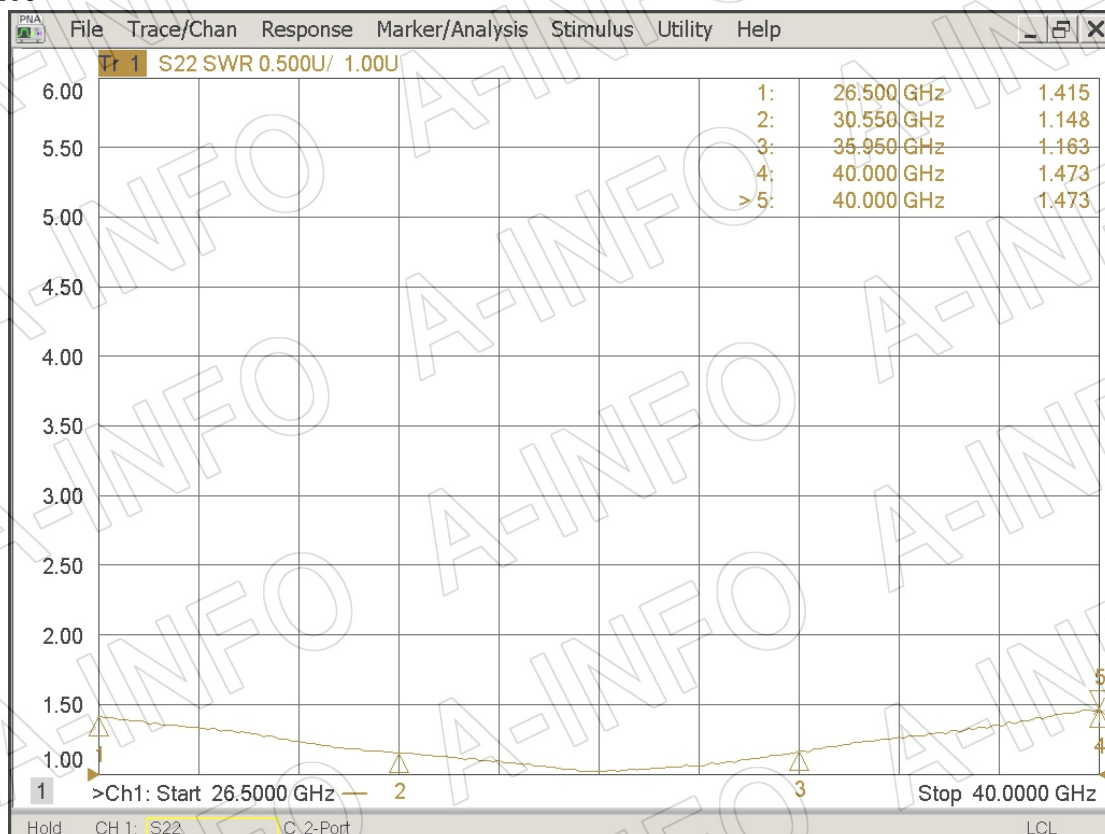

3. Amplitude Balance & Phase Balance

