



For reference only. See data sheet for the detailed specifications.

Technical Specification

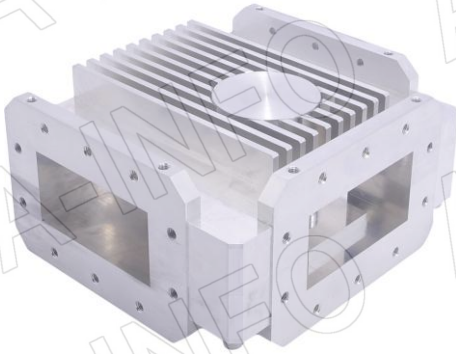

EIA WR	WR340
Frequency Range(GHz)	2.30 – 2.60
Bandwidth(MHz)	300
Insertion Loss(dB)	0.3 Max.
Isolation(dB)	20 Min.
VSWR	1.20:1 Max.
Power Handling(W CW)	250
Flange	FDP26(UDR26) (With 10xM6 Deep15 threaded holes)
Material	Al
Size(mm)	170 x 188 x 95.3
Net Weight(Kg)	3.99 Around

Outline Drawing (Size: mm)

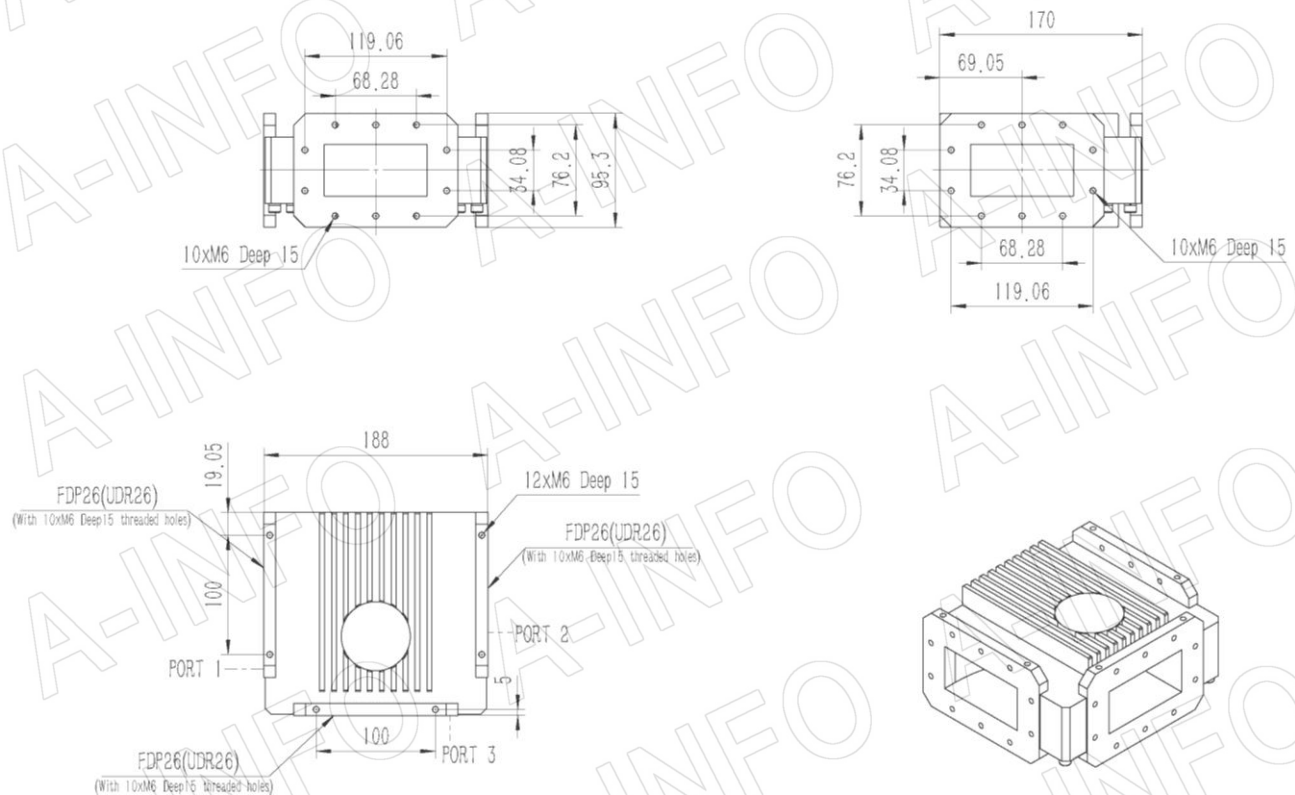

AINFO Inc.

Page 1 of 4


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Outline Drawing (Size: mm)

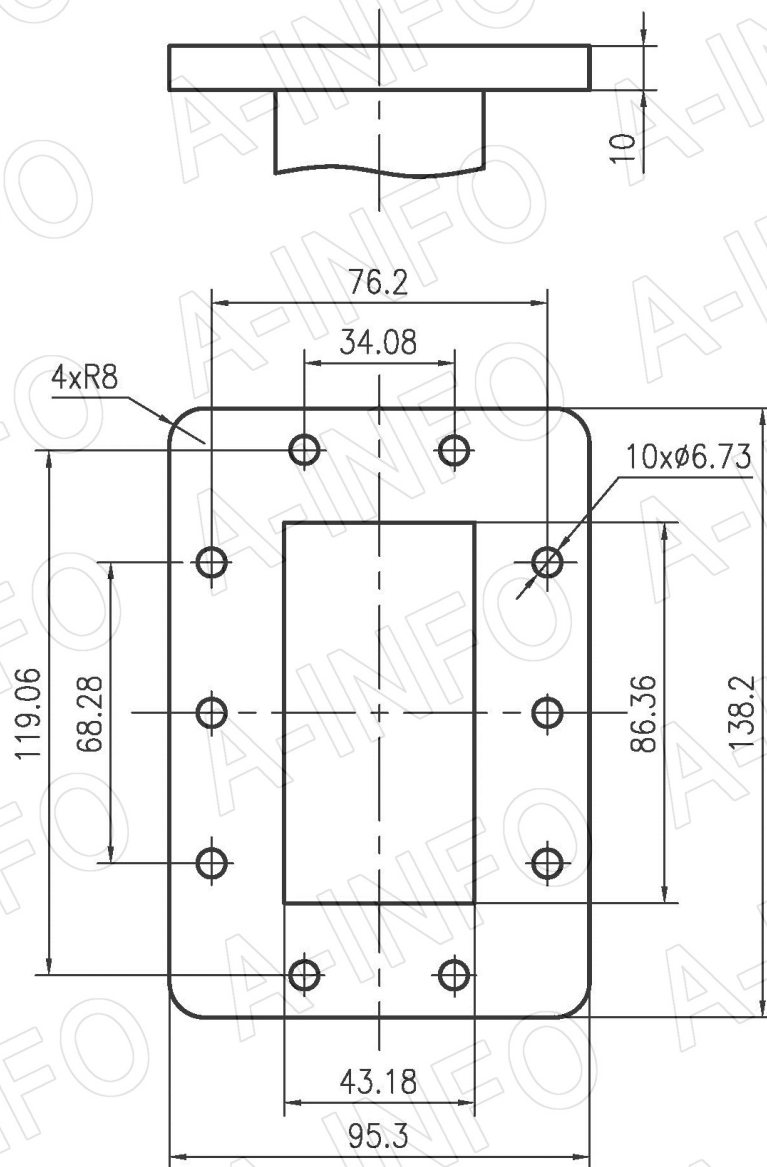

FDP26

AINFO Inc.

Page 2 of 4


China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670


Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Test Results

Port1-Port2: I.L., Isolation & VSWR

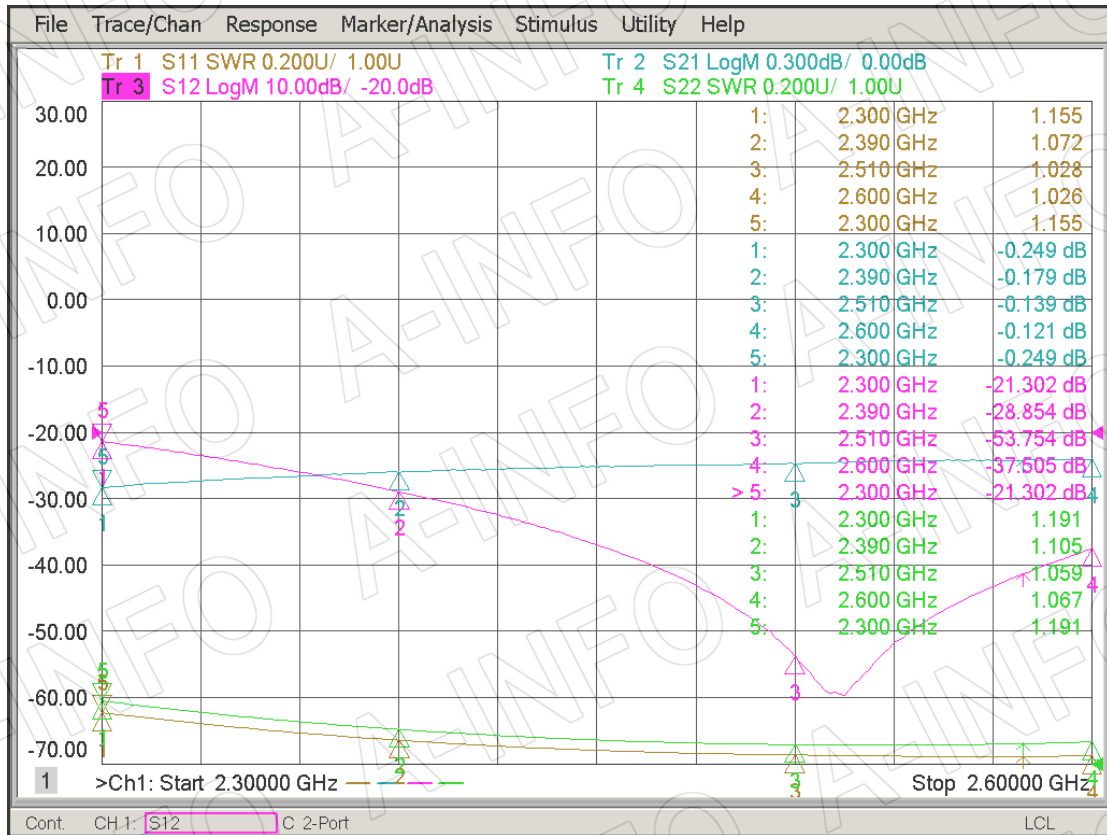

Port2-Port3: I.L., Isolation & VSWR

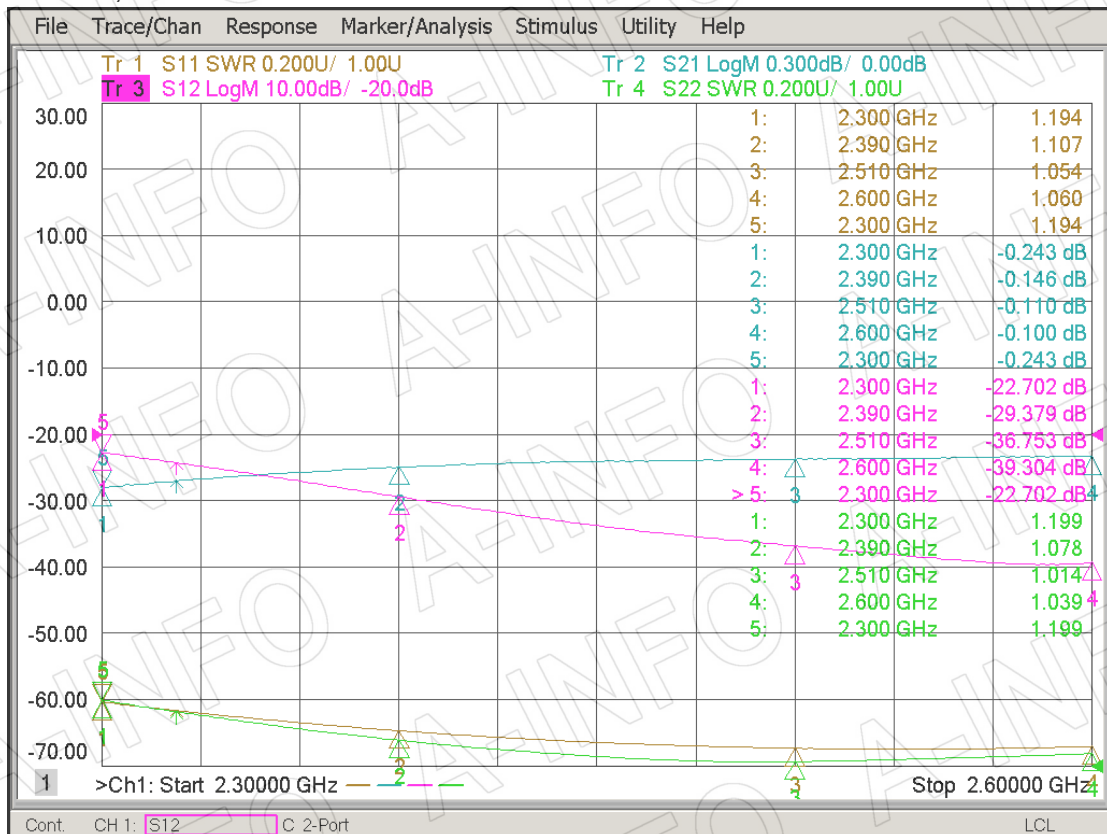

Port3-Port1: I.L., Isolation & VSWR

