

Technical Specification







EIA WR	WR340
Frequency Range(GHz)	2.20 – 3.30
Coupling(dB)	30 Typ.
Directivity(dB)	15 Typ.
Insertion Loss(dB)	0.1 Max. (Not including the theoretical loss 4.35×10^{-3} dB)
Mainline VSWR	1.10 Max.
Secondline VSWR	1.35 Max.
Flange	FDP26(UDR26)
Coupling Port	SMA-Female/N-Female
Material	Al
Net Weight(Kg)	0.68 Around

Outline Drawing (Size: mm)

Coupling Port: SMA-Female

For N-Female connector Coupling Port outline drawing, please contact A-INFO.

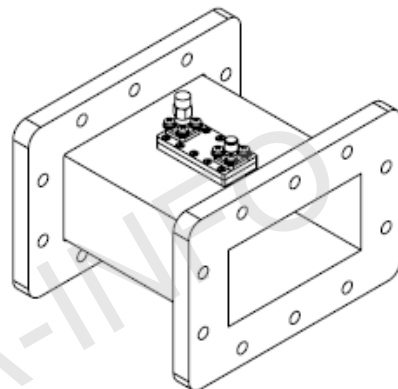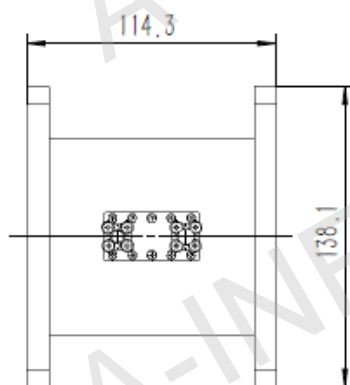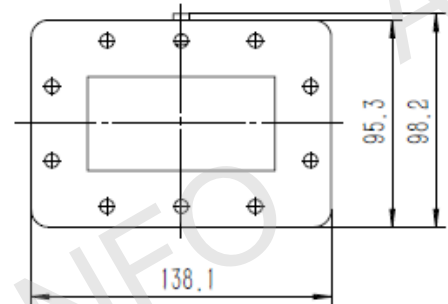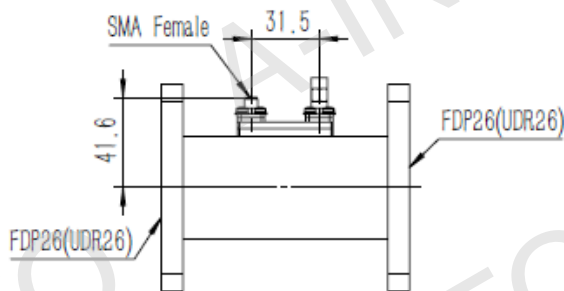

AINFO Inc.

Page 1 of 5


China(Beijing): Tel: (+86) 10-6266-7326, (+86) 10-6266-7327 Fax: (+86) 10-6266-7379
 China(Chengdu): Tel: (+86) 28-8519-2786, (+86) 28-8519-3044 Fax: (+86) 28-8519-3068
 USA: Tel: (+1) 949-639-9688, (+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
 Email: sales@ainfoinc.com


Data subject to change without notice. For current data sheets, please contact: Sales@ainfoinc.com

Test Results


Coupling

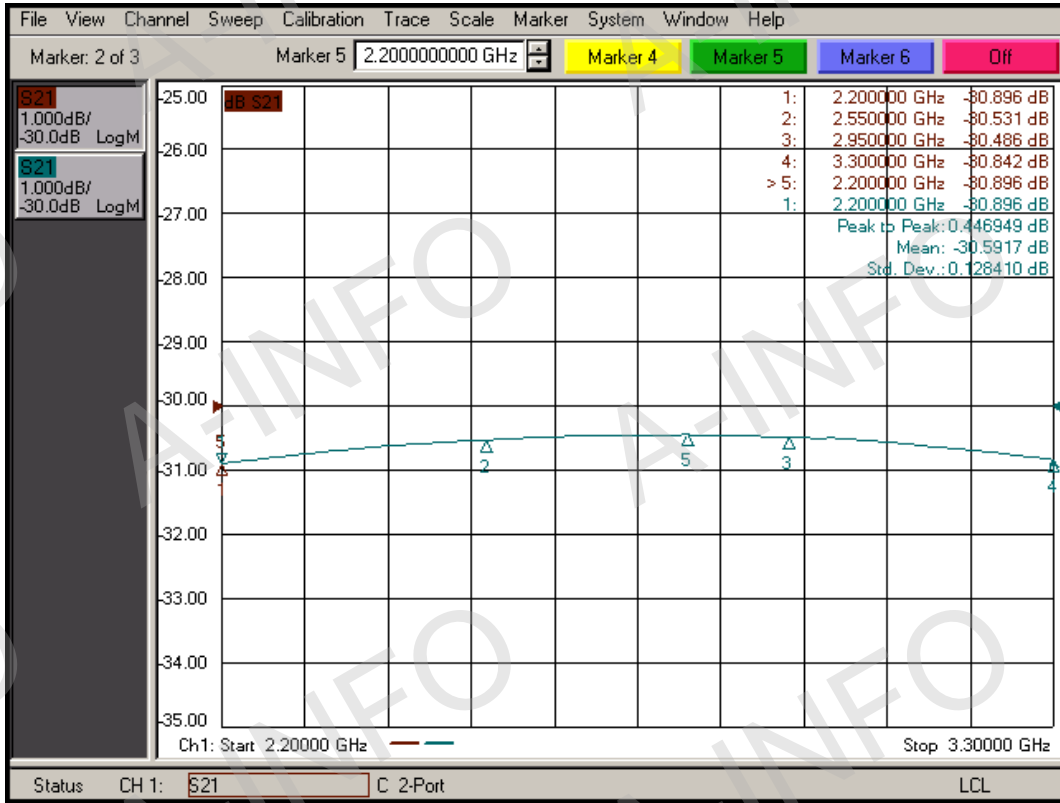


Directivity

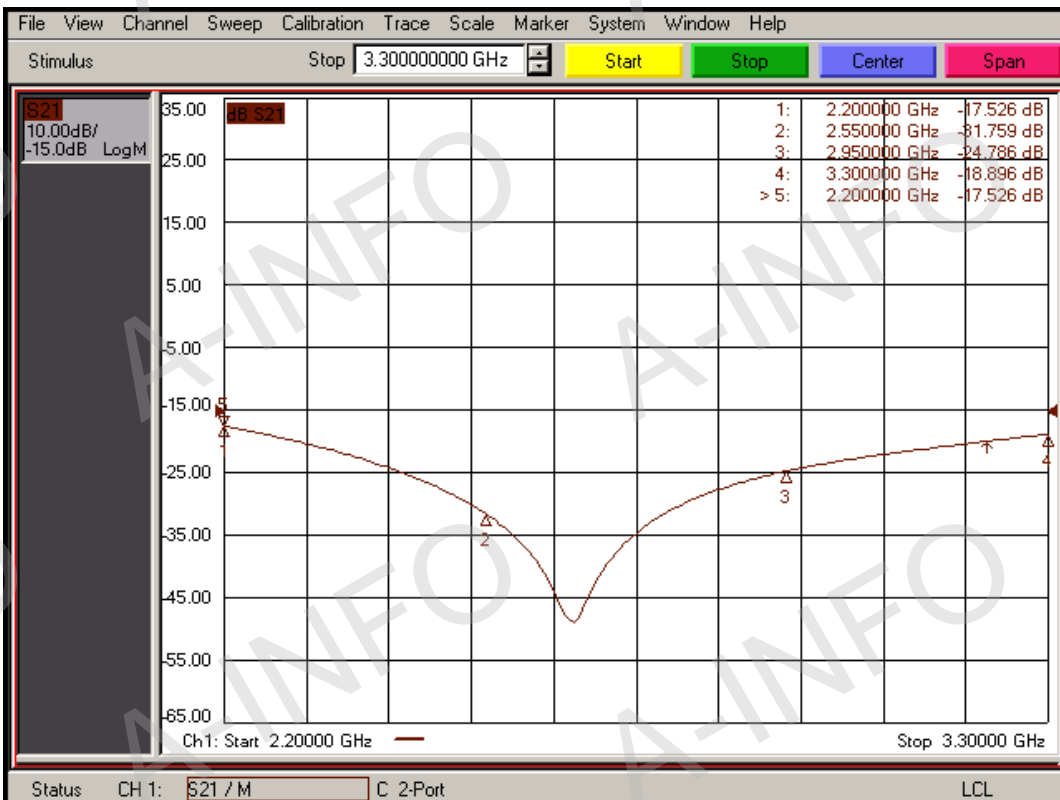

I.L. (Including the theoretical loss 4.35×10^{-3} dB)

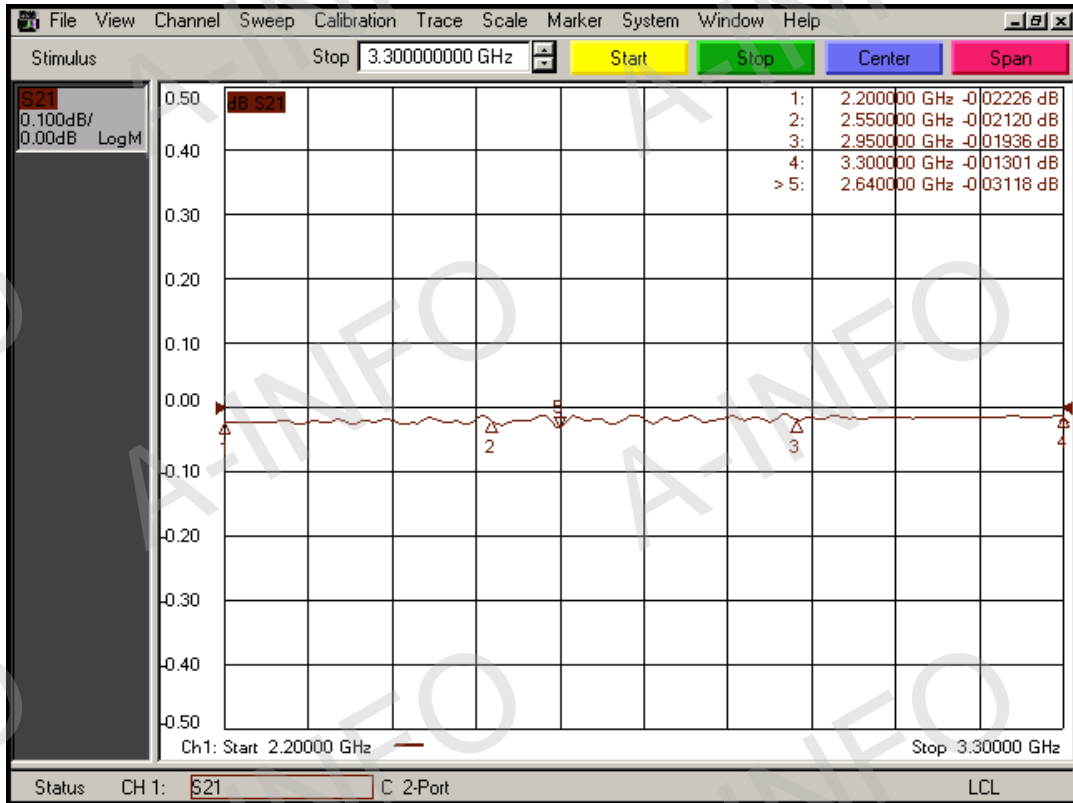

Mainline VSWR

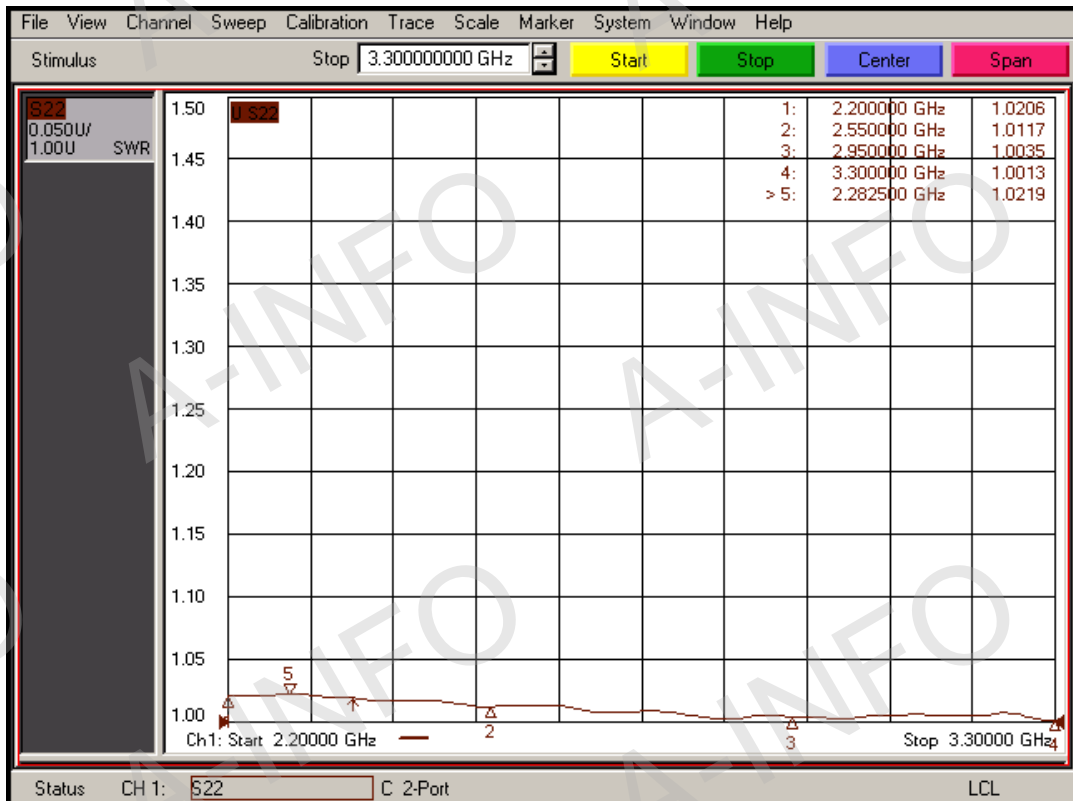

Secondline VSWR

