



Technical Specification

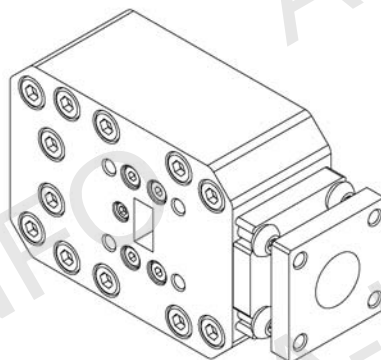


EIA WR	WR34
Frequency Range(GHz)	22.0 – 33.0
Bandwidth	Full
Common Port	10.06mm / 0.396" Circular WG
Insertion Loss(dB)	0.4 Max.
VSWR	1.50:1 Typ.
Port to Port Isolation(dB)	35 Min.
Common Port Flange	UG-595/U-M with 4xM3 threads
Flange	FBP260(UBR260) with 4xM3 threads
Material	Al
Size(mm)	63.5 x 22.4 x 38.1
Net Weight(Kg)	0.12 Around


Outline Drawing (Size: mm)

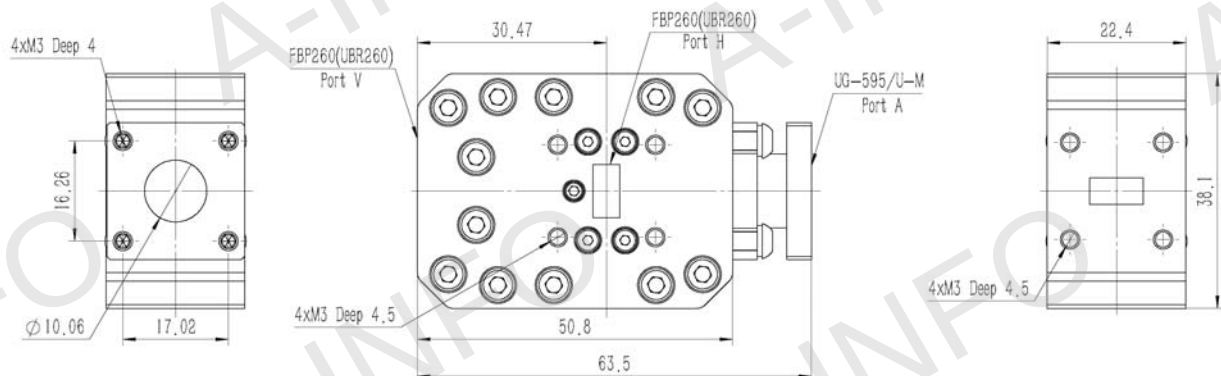

Flange Drawing (Size: mm)

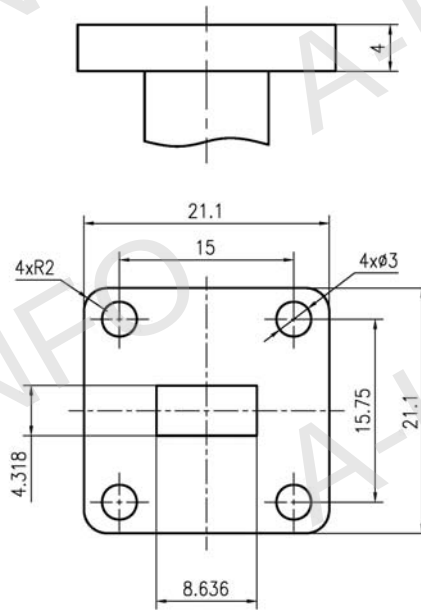


FBP260




UG-595/U-M

Test Results


Port H _ Insertion Loss(Test with two OMT back to back)

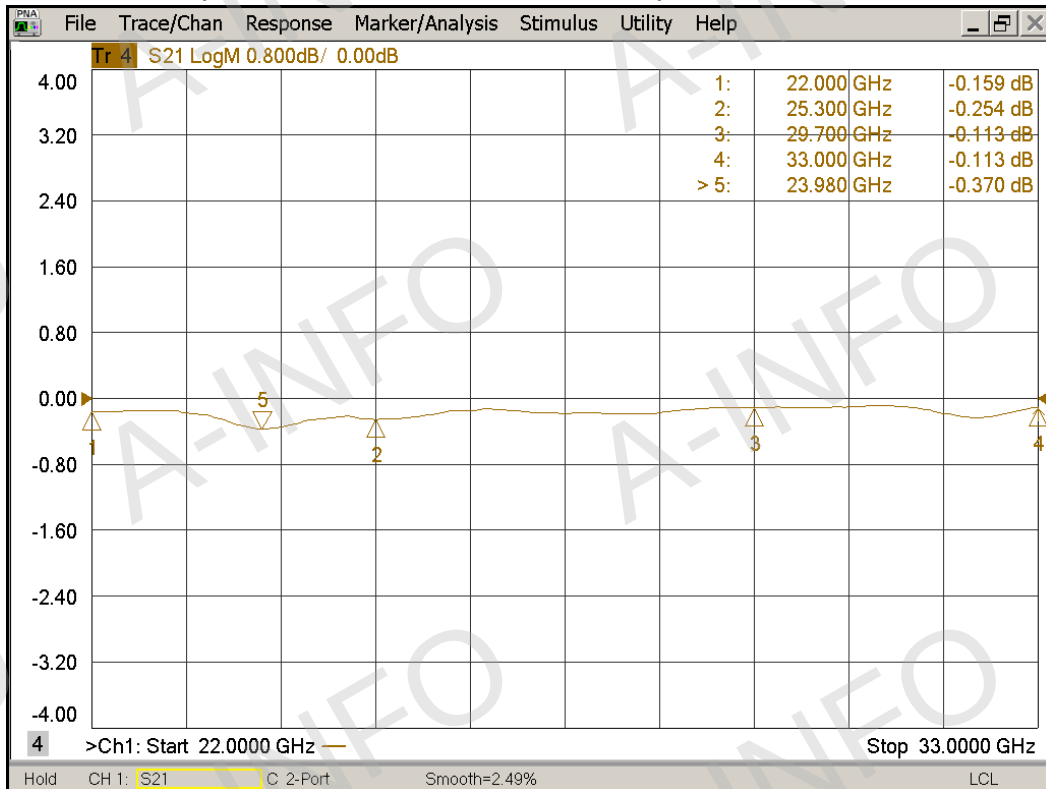


Port V _ Insertion Loss(Test with two OMT back to back)

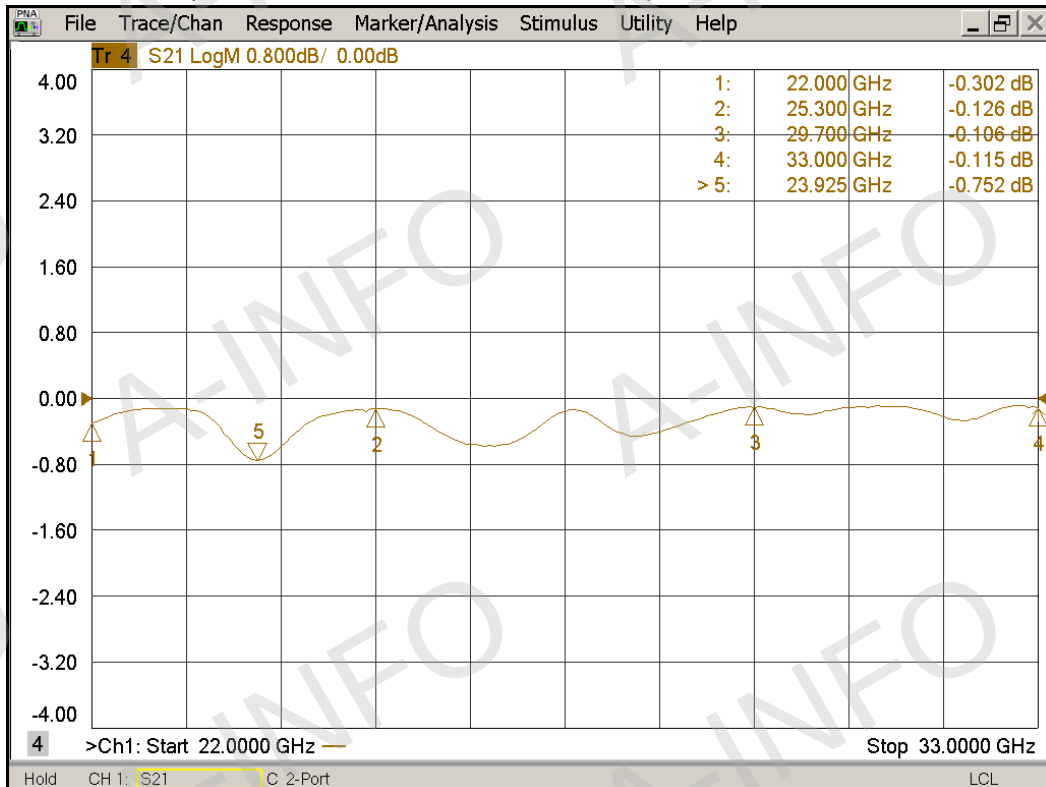

Port H_VSWR

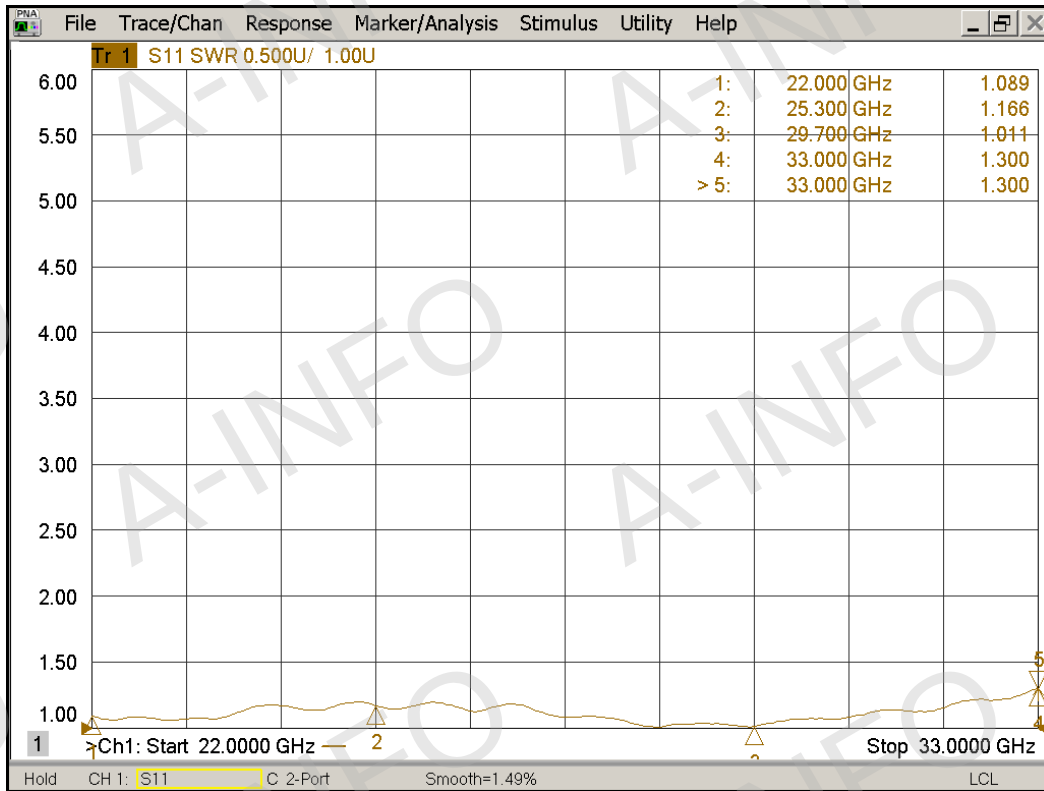

Port V_VSWR

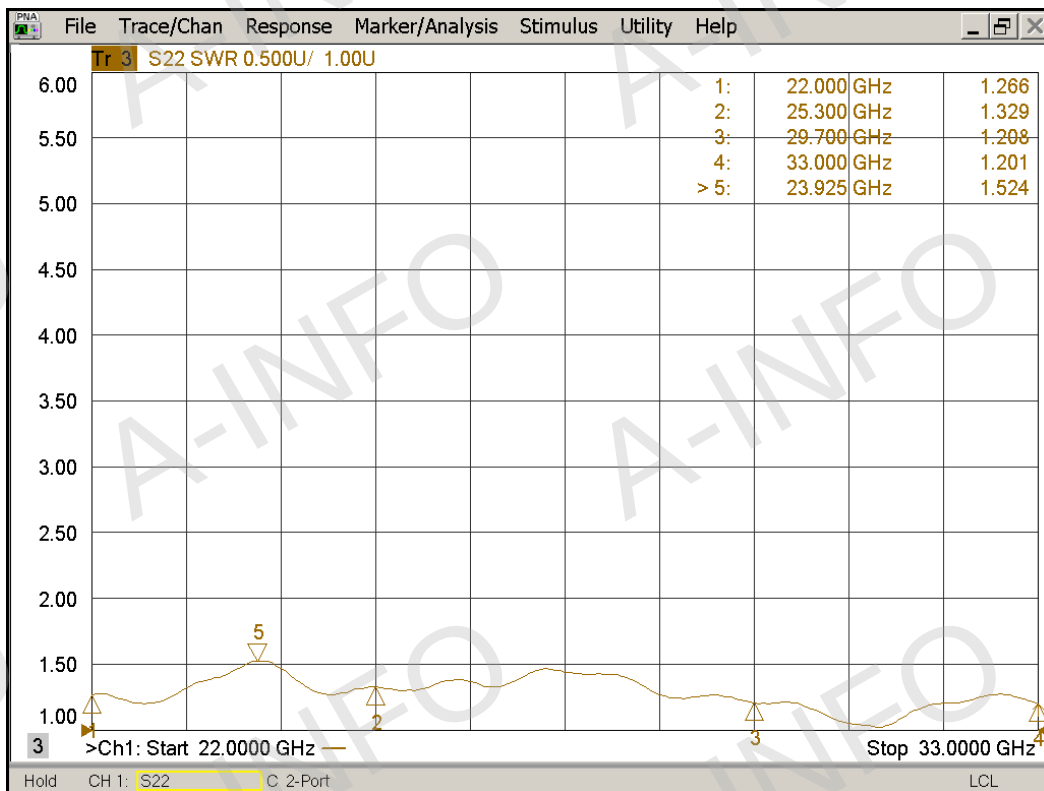

Port to Port Isolation

