



For reference only. See data sheet for the detailed specifications.

## Technical Specification

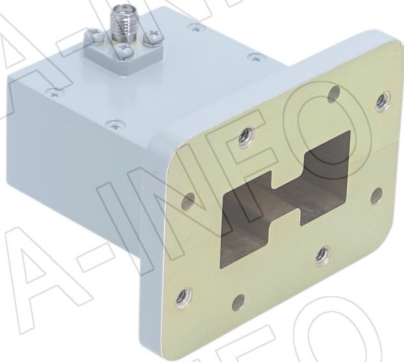

|                      |                  |
|----------------------|------------------|
| EIA WRD              | WRD350           |
| Frequency Range(GHz) | 3.5 – 8.2        |
| Insertion Loss(dB)   | 0.3 Max.         |
| VSWR                 | 1.30:1 Max.      |
| Flange               | FPWRD350D24      |
| Connector            | SMA-Female       |
| Average Power(W CW)  | 50 Max.          |
| Peak Power(KW)       | 3                |
| Material             | Al               |
| Size(mm)             | 57.7 x 70 x 50.8 |
| Net Weight(Kg)       | 0.16 Around      |

## Outline Drawing (Size: mm)

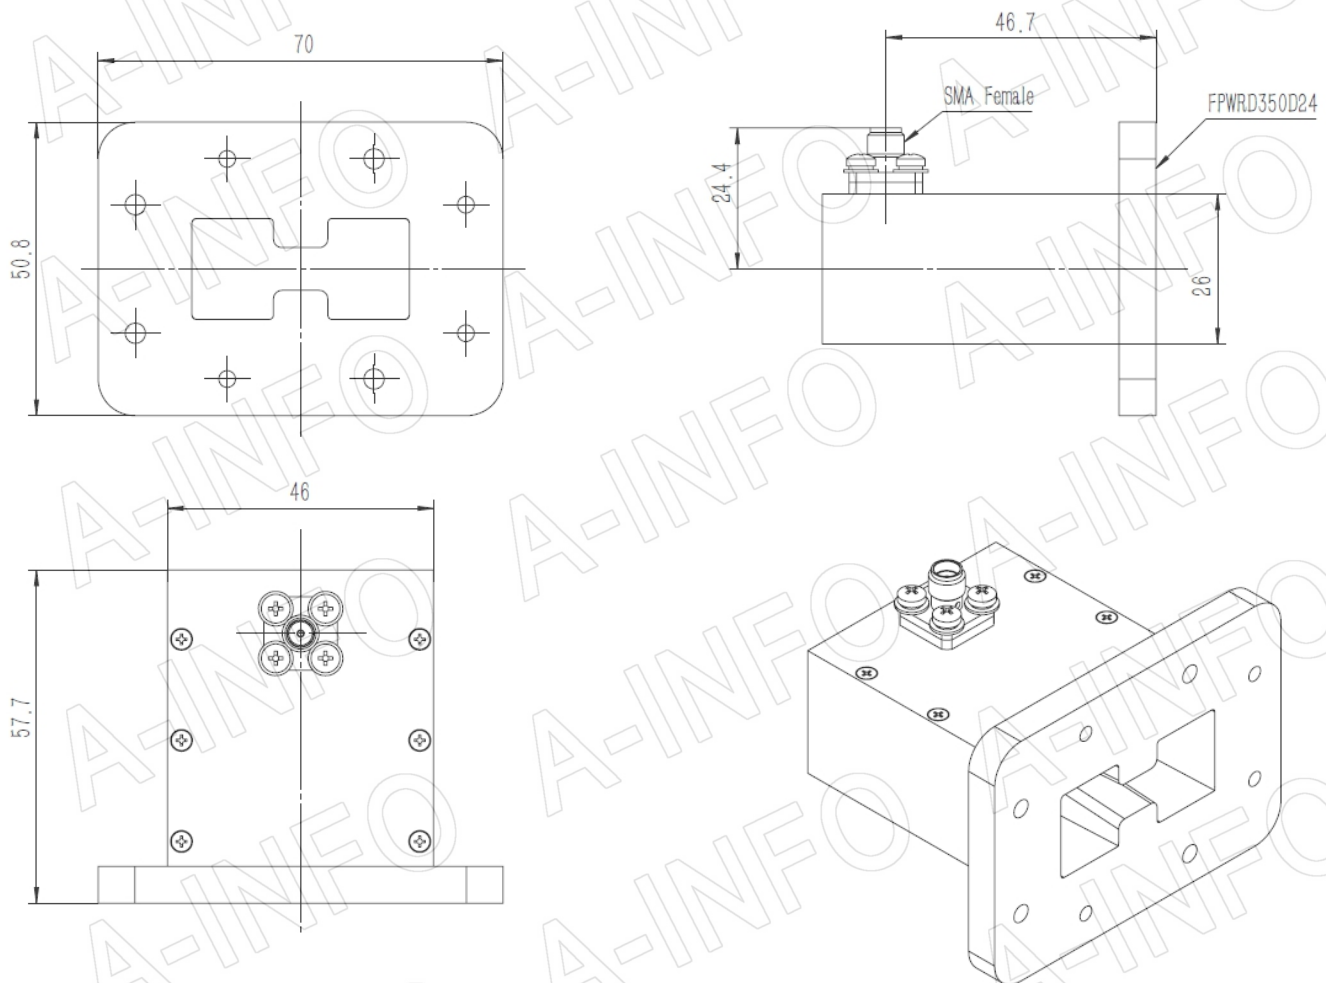

## AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,  
China(Chengdu): Tel: (+86) 28-8519-2786,  
USA : Tel: (+1) 949-639-9688,

Page 1 of 3


(+86) 10-6266-7327 Fax: (+86) 10-6266-7379  
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068  
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: [www.ainfoinc.com](http://www.ainfoinc.com)  
Email: [sales@ainfoinc.com](mailto:sales@ainfoinc.com)

## Flange Drawing (Size: mm)


### FPWRD350D24

(With four through mounting holes  
and four screws holes)

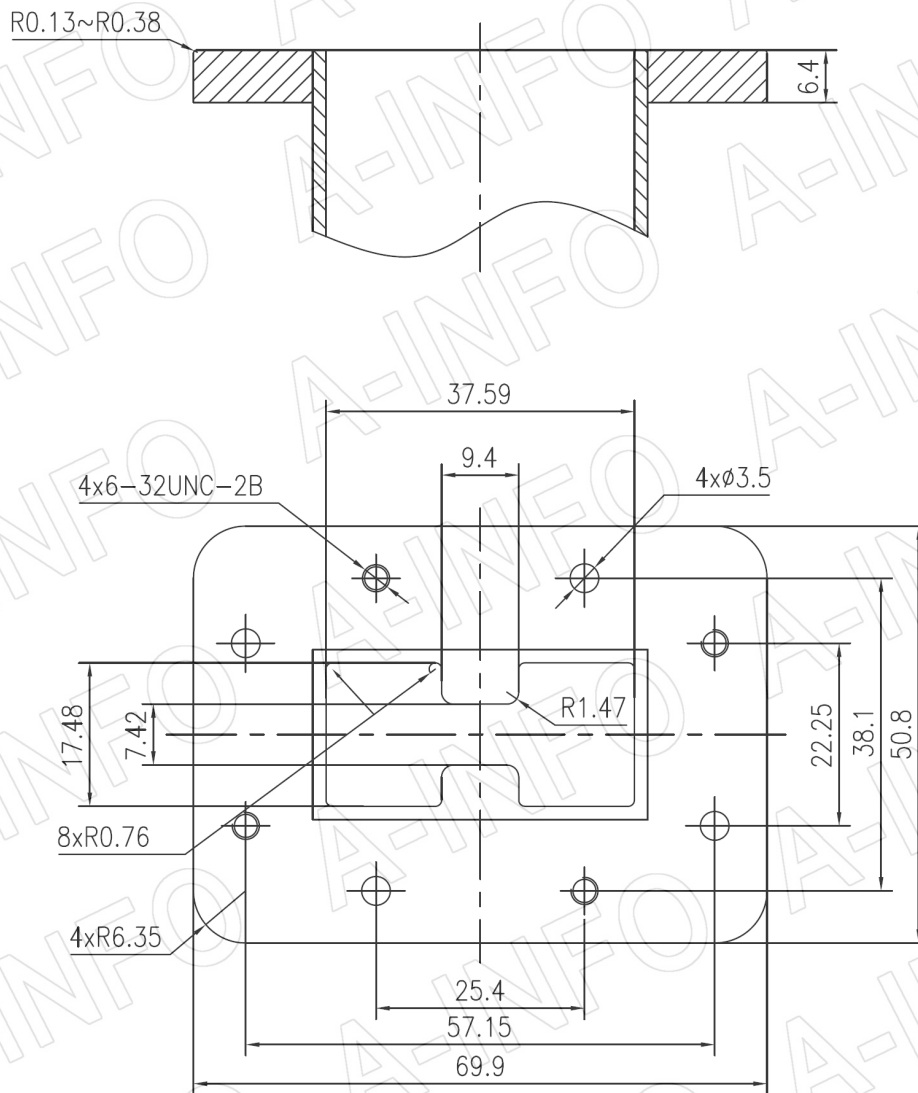

### Test Results

I. L.(Test with two adapters back to back)

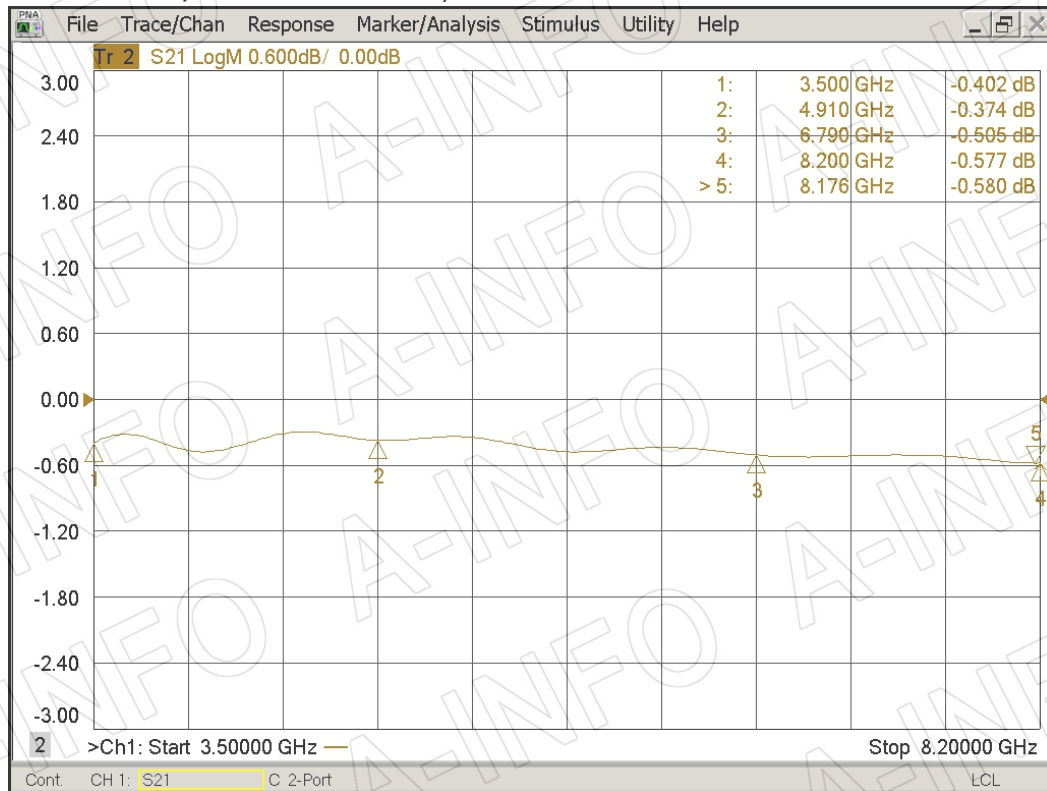

### VSWR

