



Technical Specification

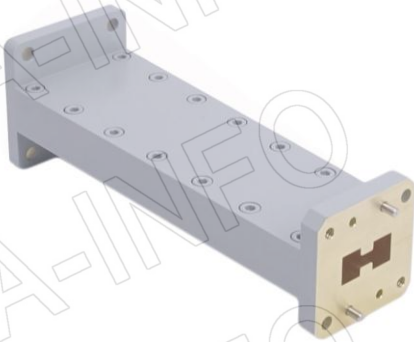

EIA WRD to WR	WRD750 to WR90
Frequency Range(GHz)	8.2 – 12.4
Length (mm/inch)	127/5
Insertion Loss(dB)	0.15 Max.
VSWR	1.15:1 Max.
WRD750 Flange	FPWRD750D24
WR90 Flange	FBP100(UBR100)
Material	Cu
Size(mm)	127 x 41.4 x 41.4
Net Weight(Kg)	0.46 Around

Outline Drawing (Size: mm)

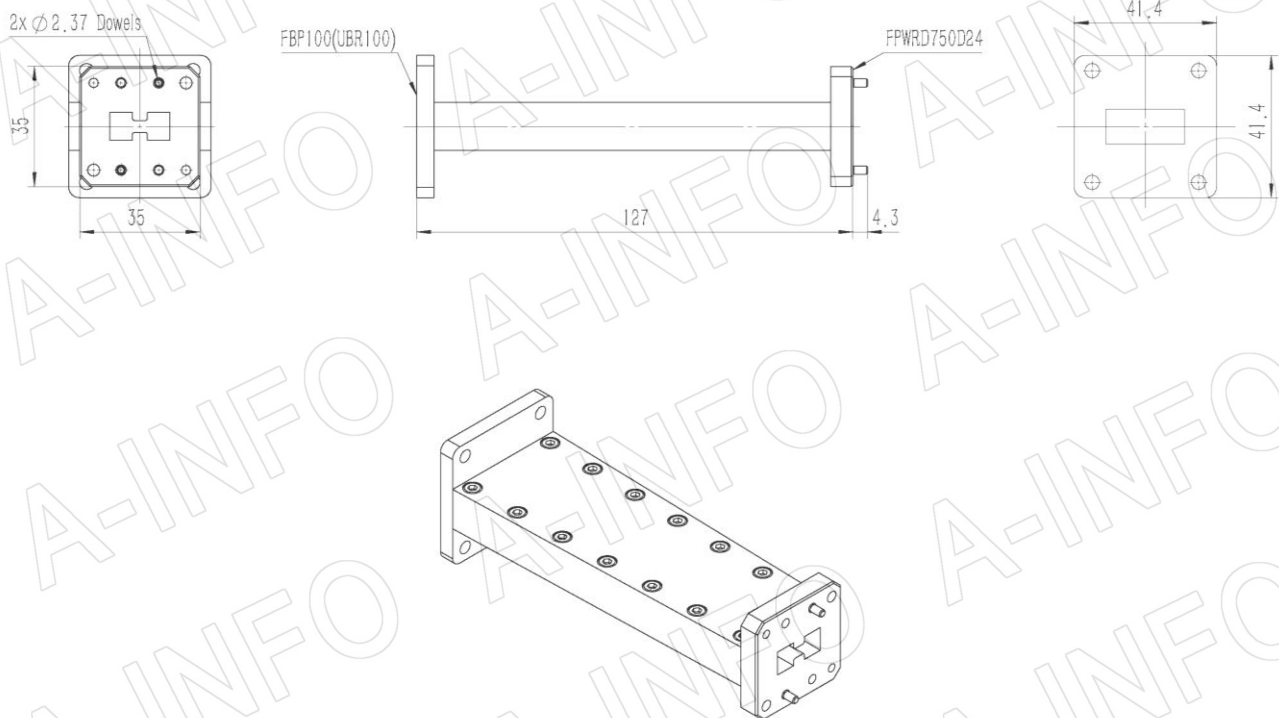

AINFO Inc.

Page 1 of 4

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,


(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

(With two through mounting holes
and two screws holes)




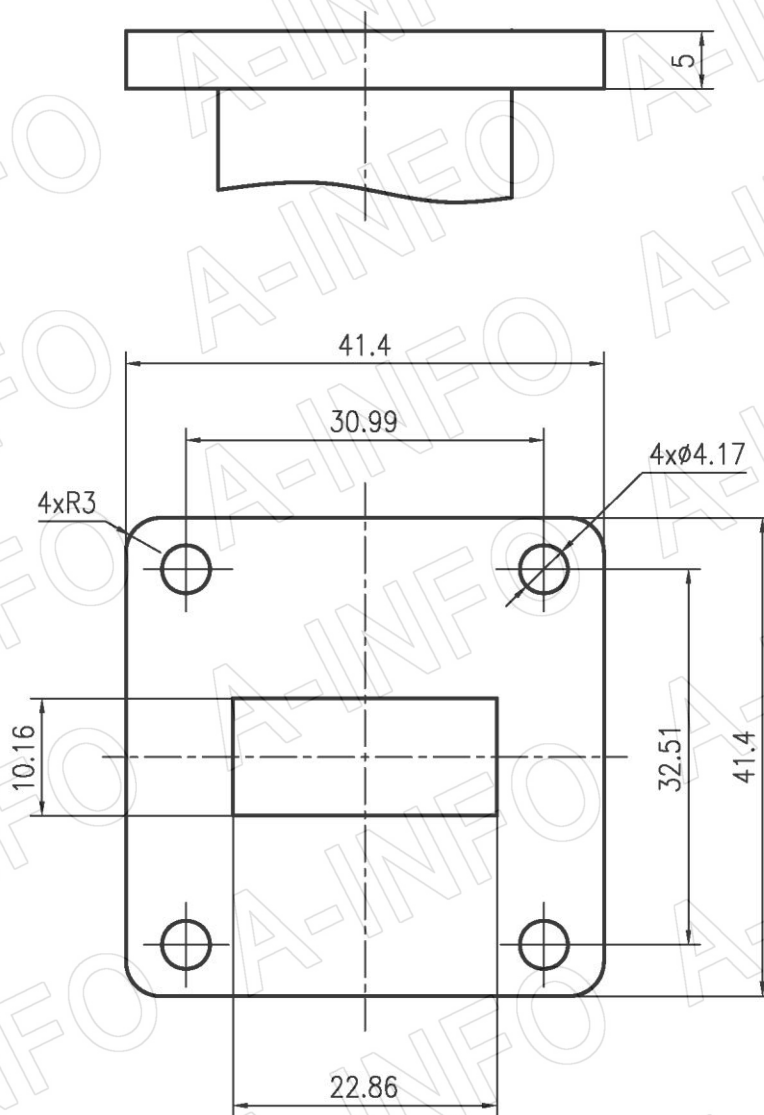


FBP100

Test Result

Insertion Loss (Test with two transitions back to back)

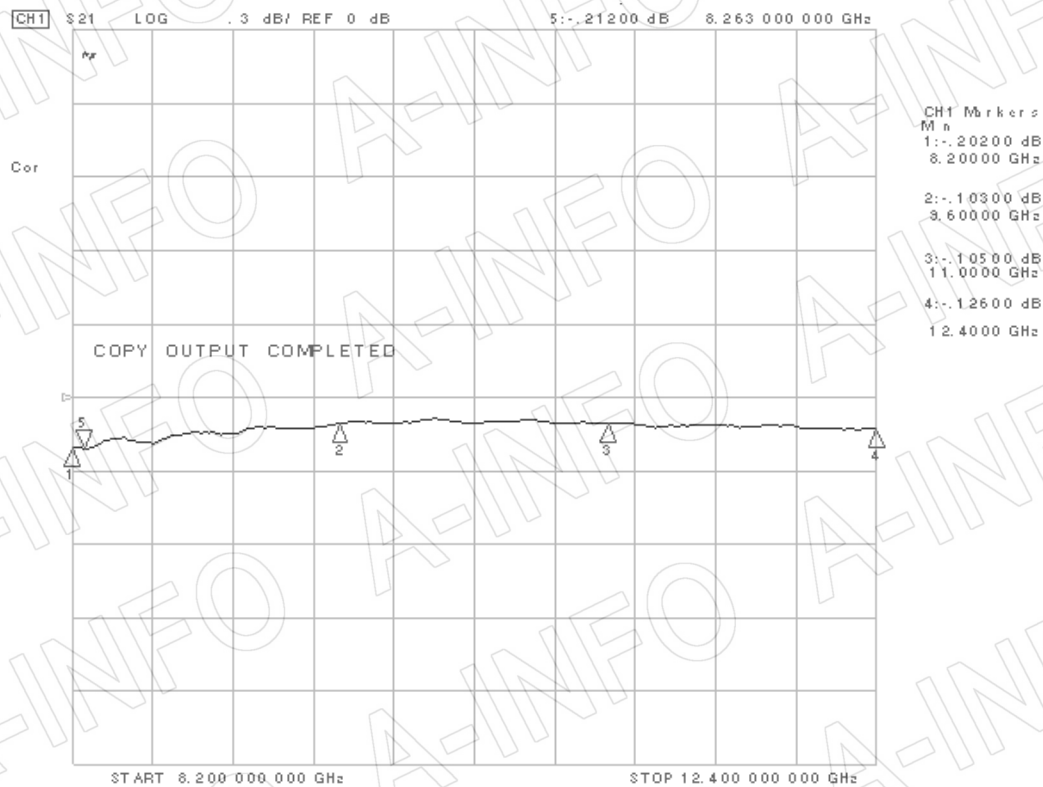

VSWR

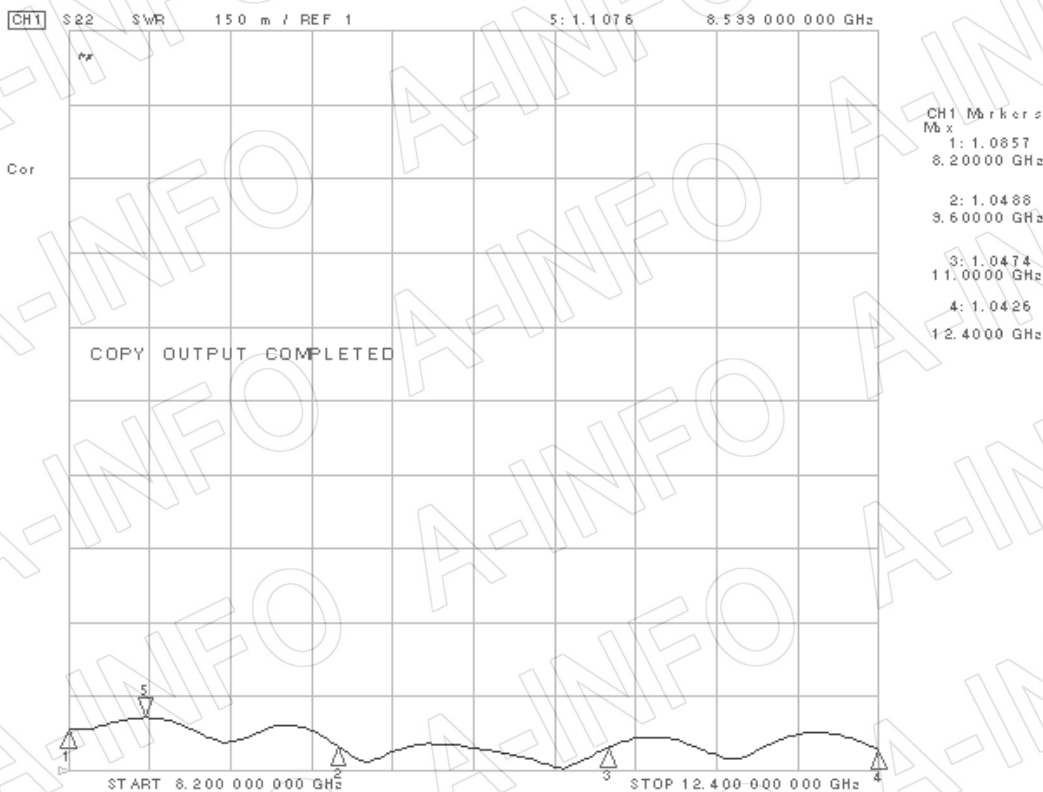

AINFO Inc.

Page 4 of 4

China(Beijing):
China(Chengdu):
USA :

Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9608

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com