




For reference only. See data sheet for the detailed specifications.

Technical Specification

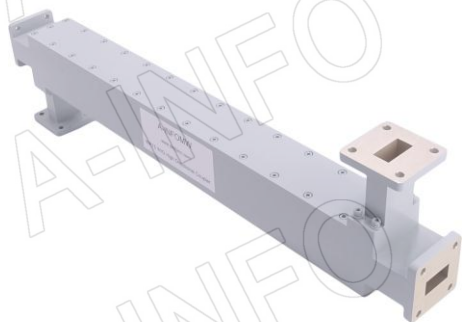

EIA WR	WR75
Frequency Range(GHz)	10.0 – 15.0
Coupling(dB)	40
Coupling Accuracy(dB)	±0.9 Max.
Frequency Sensitivity(dB)	±0.7 Max.
Directivity(dB)	30 Min.
Insertion Loss(dB)	0.3 Max. (Not including the theoretical loss 8.69×10^{-4} dB)
Mainline VSWR	1.05:1 Max.
Secondline VSWR	1.15:1 Max.
Flange	FBP120(UBR120)
Material	Al
Size(mm)	381 x 38 x 127
Net Weight(Kg)	1.10 Around

Outline Drawing (Size: mm)

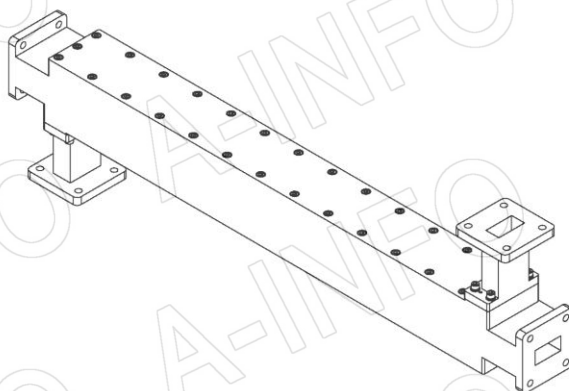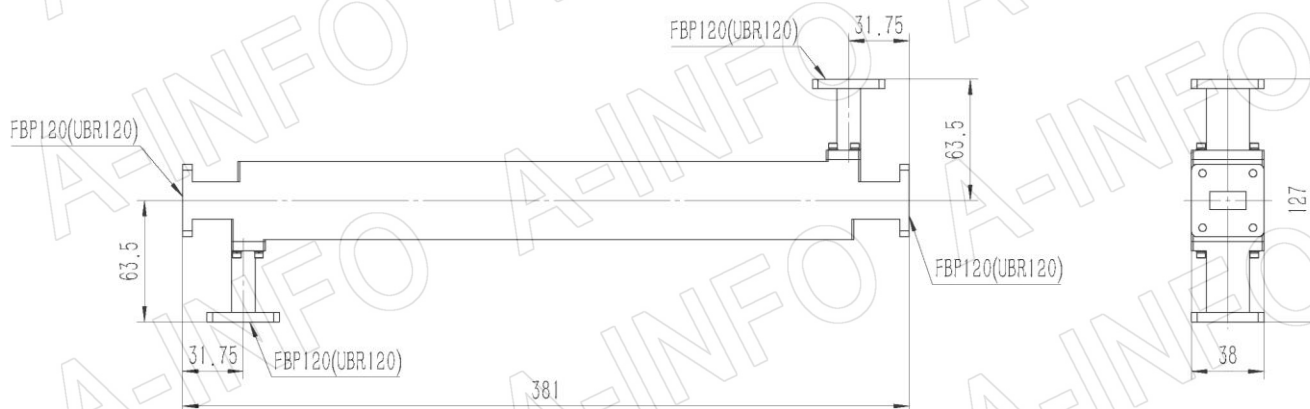

AINFO Inc.

China(Beijing):

China(Chengdu):

USA :

Tel: (+86) 10-6266-7326,

Tel: (+86) 28-8519-2786,

Tel: (+1) 949-639-9688,

Page 1 of 6

(+86) 10-6266-7327

(+86) 28-8519-3044

(+1) 949-639-9608

Fax: (+86) 10-6266-7379


Fax: (+86) 28-8519-3068

Fax: (+1) 949-639-9670

Website: www.ainfoinc.com

Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

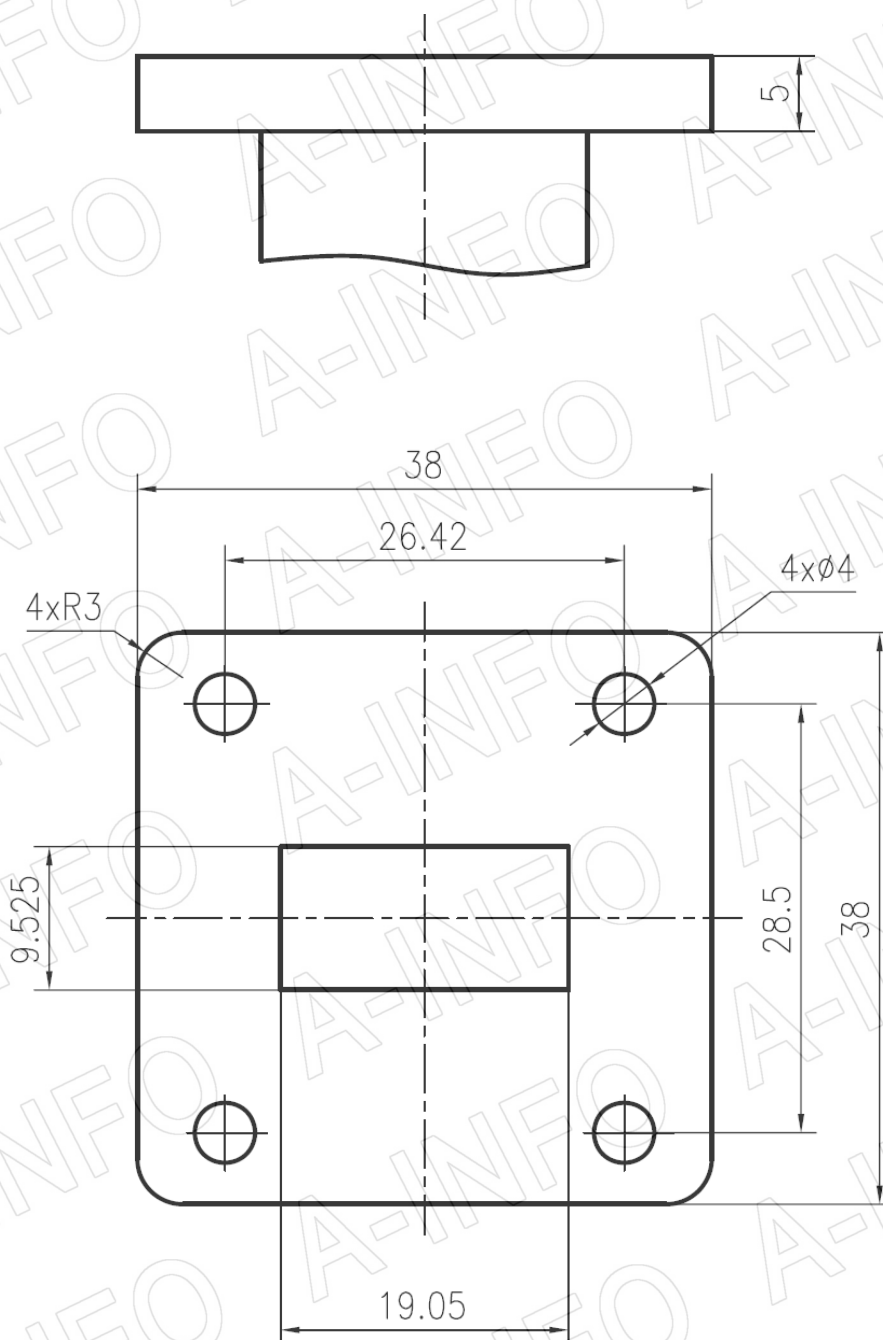

FBP120

AINFO Inc.

China(Beijing):

China(Chengdu):

USA :

Tel: (+86) 10-6266-7326,

Tel: (+86) 28-8519-2786,

Tel: (+1) 949-639-9688,

Page 2 of 6

(+86) 10-6266-7327

(+86) 28-8519-3044

(+1) 949-639-9608

Fax: (+86) 10-6266-7379

Fax: (+86) 28-8519-3068

Fax: (+1) 949-639-9670


Website: www.ainfoinc.com

Email: sales@ainfoinc.com


Test Results

Coupling

Port 1

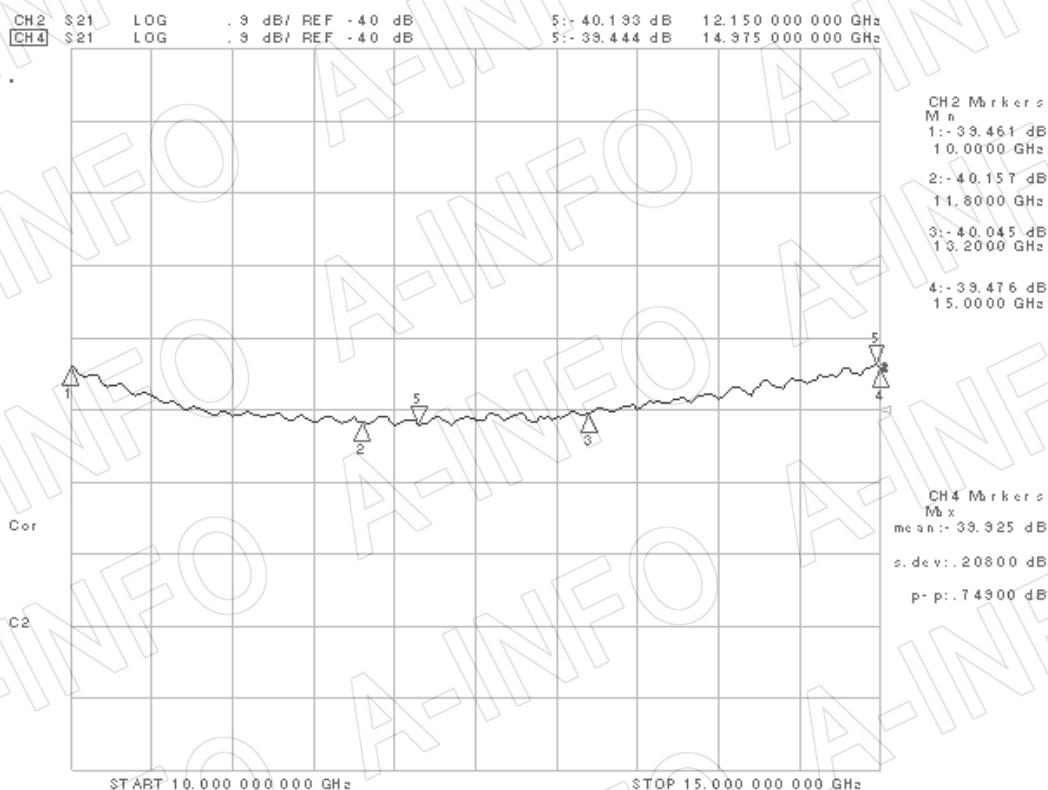


Port 2

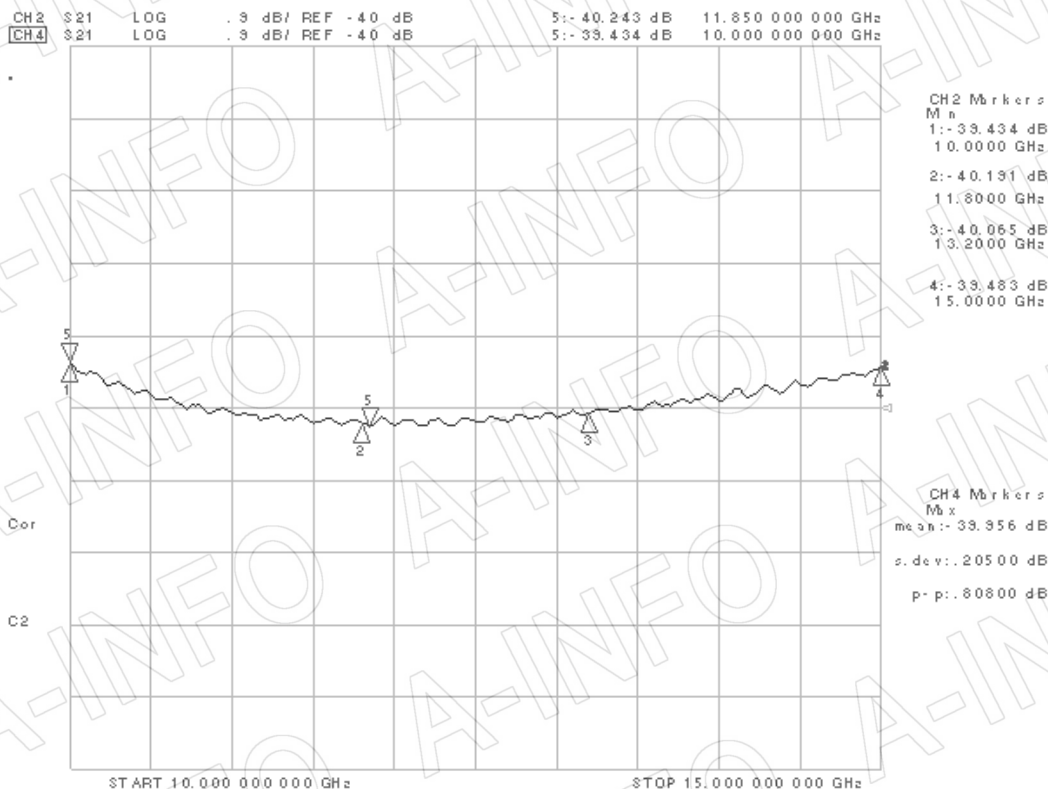


Directivity


Port 1

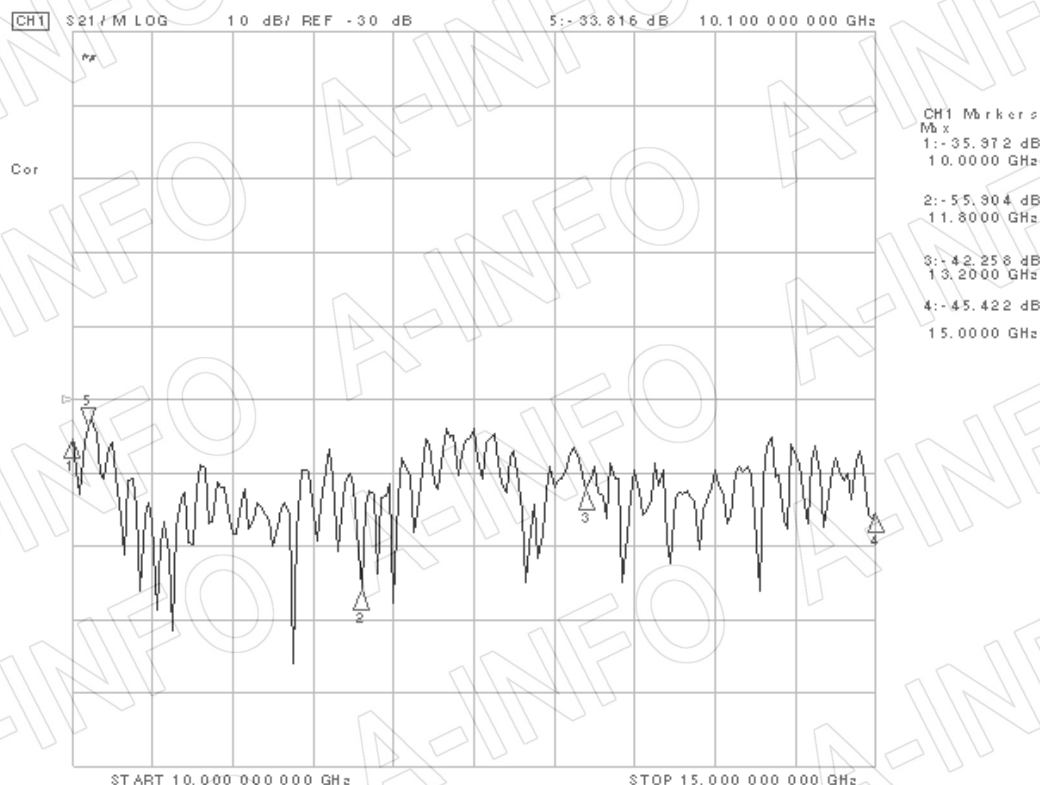


Port 2

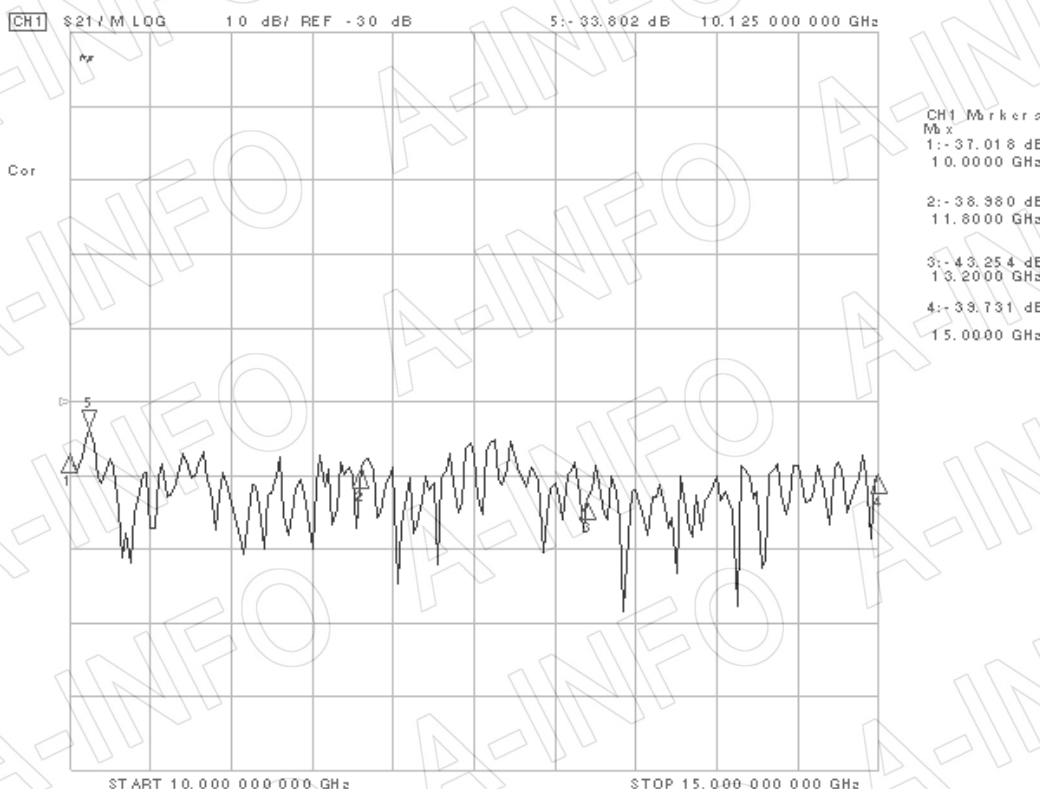

I.L. (Including the theoretical loss 8.69×10^{-4} dB)

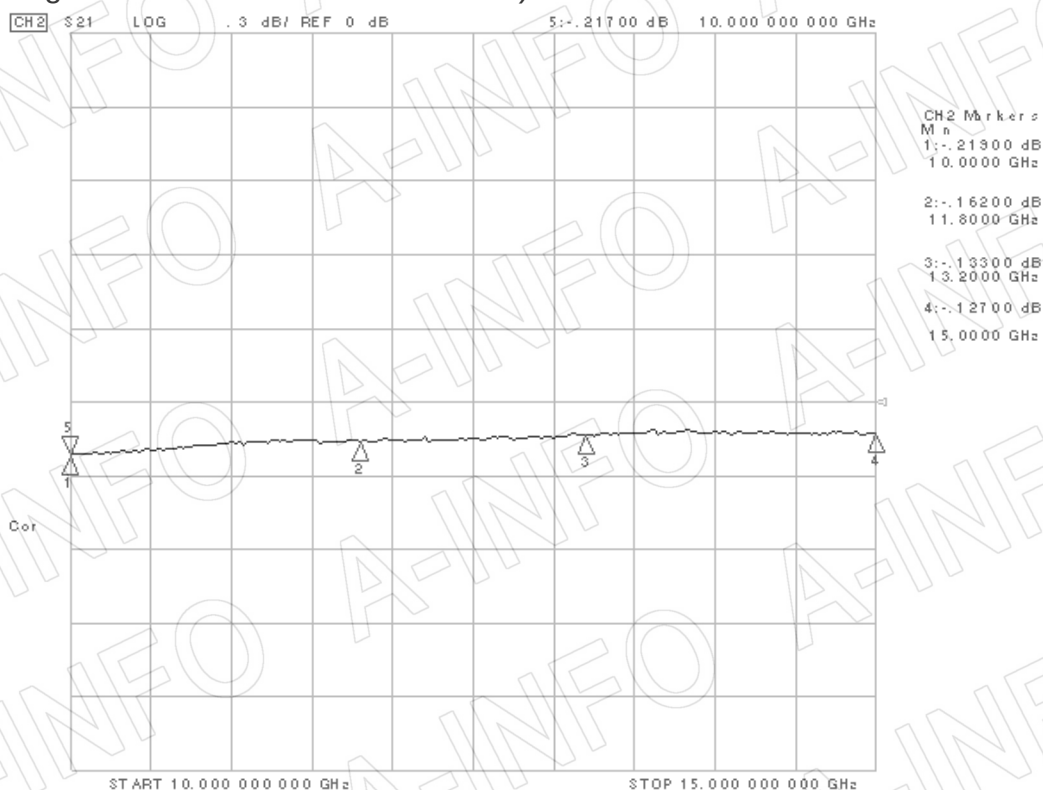

Mainline VSWR

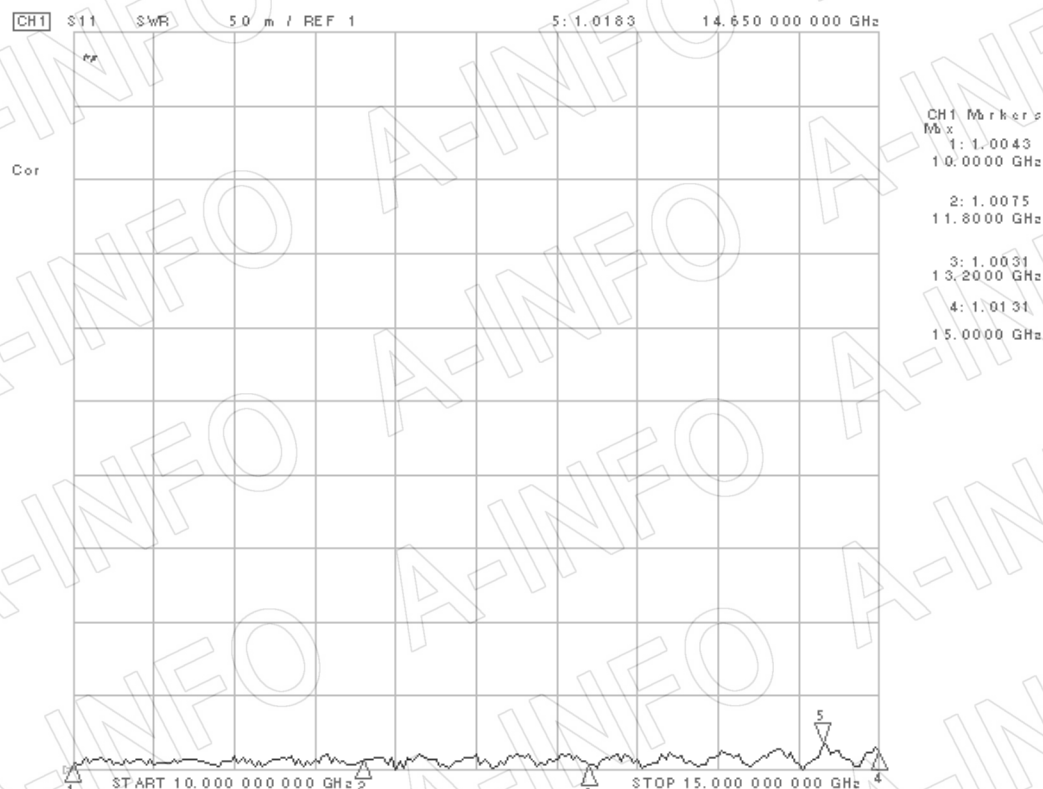

AINFO Inc.

China(Beijing): Tel: (+86) 10-6266-7326,
China(Chengdu): Tel: (+86) 28-8519-2786,
USA: Tel: (+1) 949-639-9688,


Page 5 of 6

(+86) 10-6266-7327 Fax: (+86) 10-6266-7379
(+86) 28-8519-3044 Fax: (+86) 28-8519-3068
(+1) 949-639-9608 Fax: (+1) 949-639-9670

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Secondline VSWR

Port 1

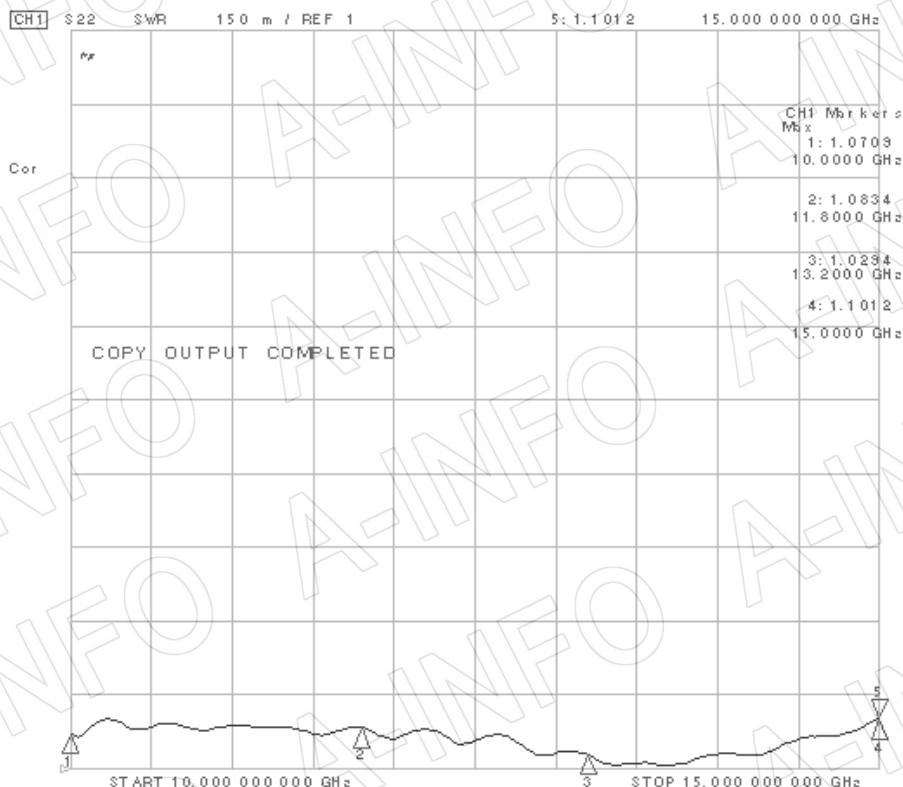

Port 2

