



LB-112-10-A Standard Gain Horn Antenna 7.05-10GHz 10dB Gain Rectangular Waveguide Interface

Standard Gain Horn Antenna Operating From 7.05GHz to 10GHz With a Nominal 10dB Gain With Rectangular Waveguide Interface

Product Information

SKU	LB-112-10-A
-----	-------------

Description

Standard Gain Horn Antenna LB-112-10-A, operating from 7.05 to 10GHz with a nominal 10dB gain and low VSWR 1.15:1 with FBP84 output. The model LB-112-10-A has uniform gain through its frequency span, providing efficient performance characteristics and directionality. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	7.05	Output Type	Waveguide
Frequency, Max (GHz)	10	Flange Style	Rectangular
Waveguide Type	Rectangular	Flange Type	Cover
Waveguide Size EIA WR	WR112	Flange Designation	FBP84(UBR84)
Gain, Typ (dBi)	10	Mechanical Specification	
Polarization	Linear	Figure	A Type
3dB Beamwidth, E-Plane, Typ (Deg.)	41	Body Material	Al
3dB Beamwidth, H-Plane, Typ (Deg.)	40	Finish	Chemical Conversion Coating, Gray Paint
Cross Pol. Isolation, Typ (dB)	30	Size, W (mm)	52
VSWR, Typ	1.15:1	Size, H (mm)	47.8
		Size, L (mm)	90
		Weight, (kg)	0.057

Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	---	--------------	---

Outline Drawing

FBP84 Output (P/N: LB-112-10-A)

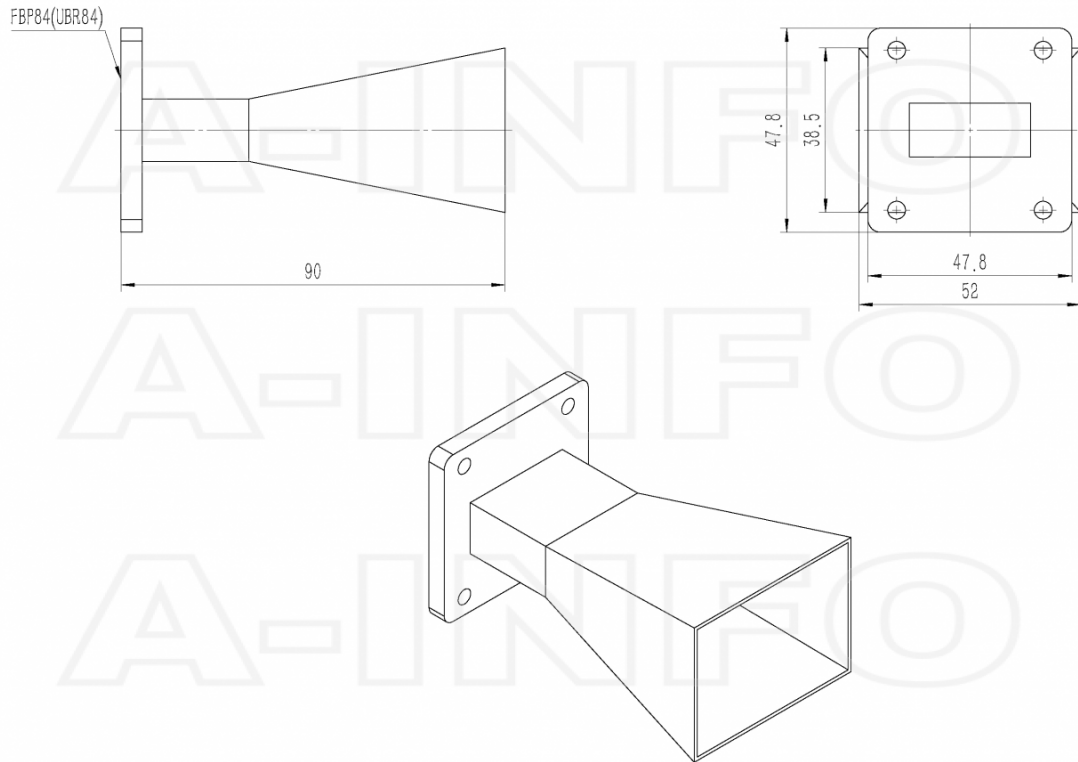


Flange Drawing

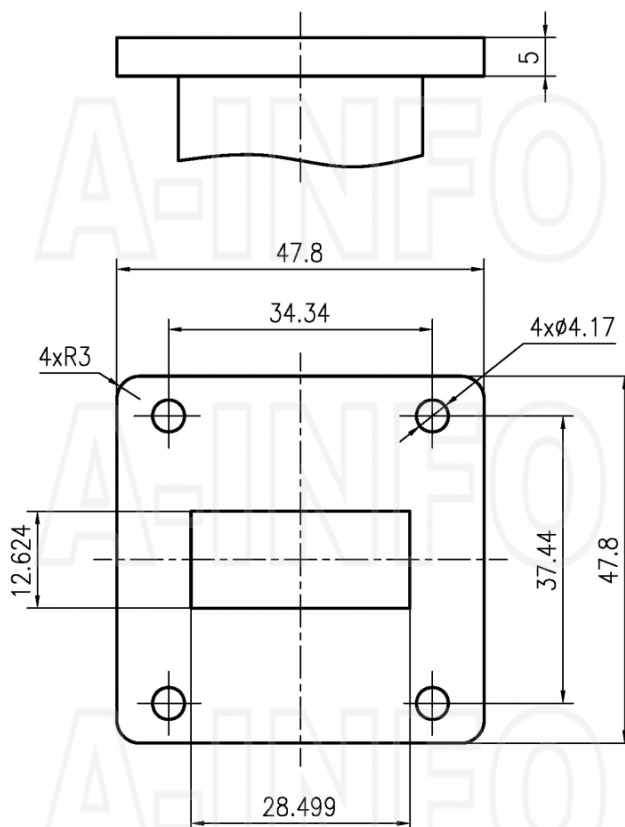


FBP84

Typical Test Results

Gain

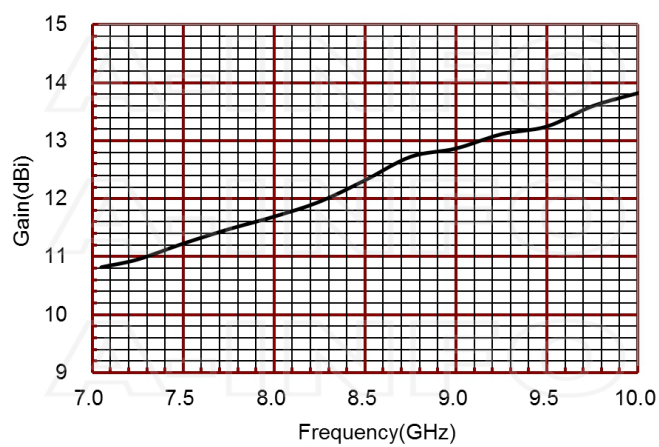


Antenna Factor

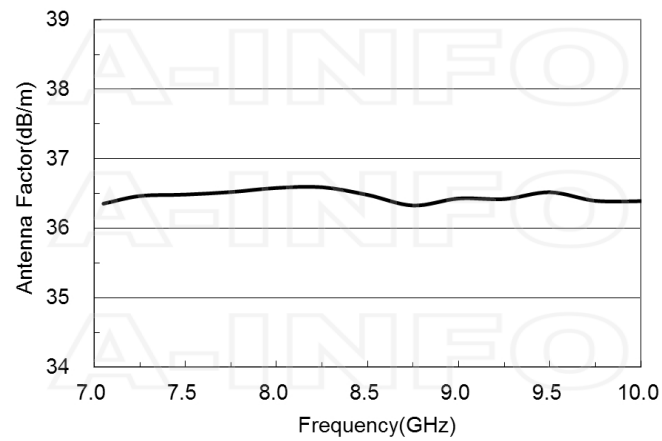


Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
7.05	10.82	36.35
7.25	10.95	36.46
7.50	11.23	36.48
7.75	11.47	36.52
8.00	11.69	36.58
8.25	11.95	36.59
8.50	12.32	36.48
8.75	12.72	36.33
9.00	12.87	36.43
9.25	13.11	36.42
9.50	13.25	36.52
9.75	13.60	36.39
10.00	13.82	36.39





Cross Polarization Isolation



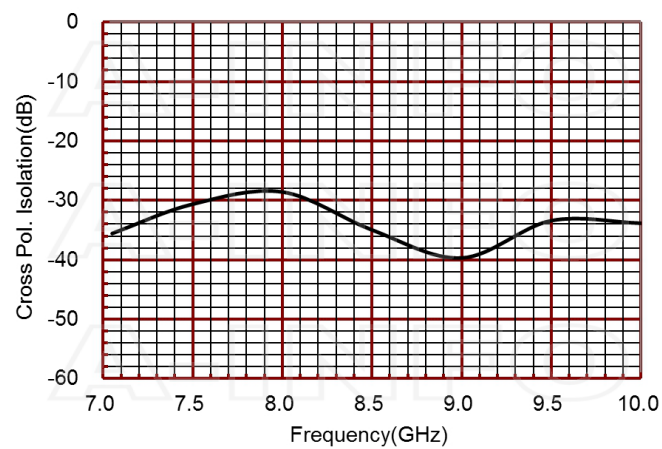


VSWR

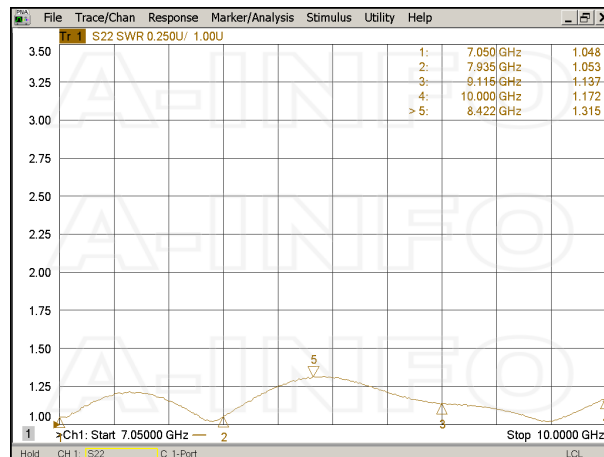

Pattern

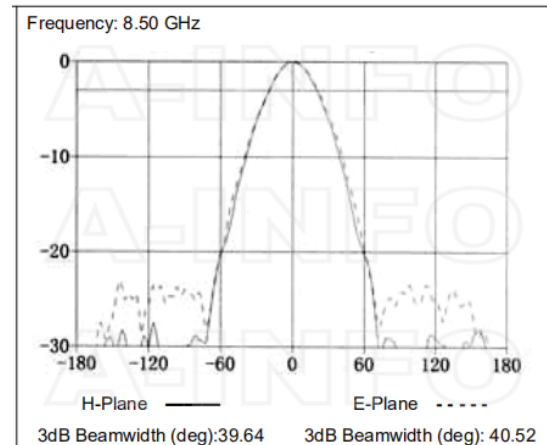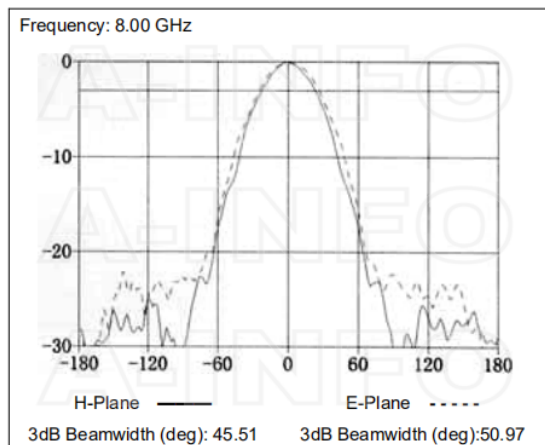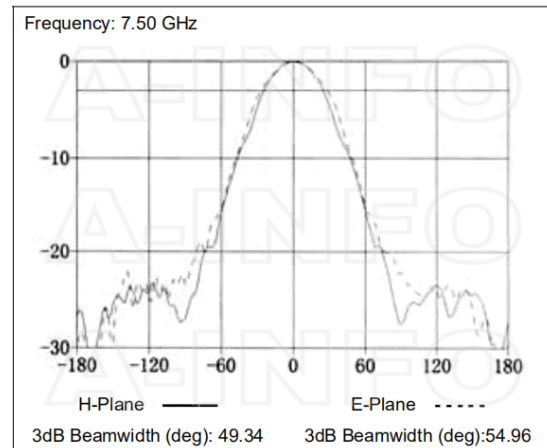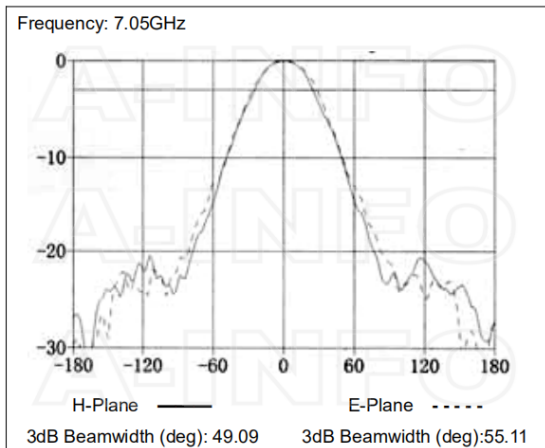

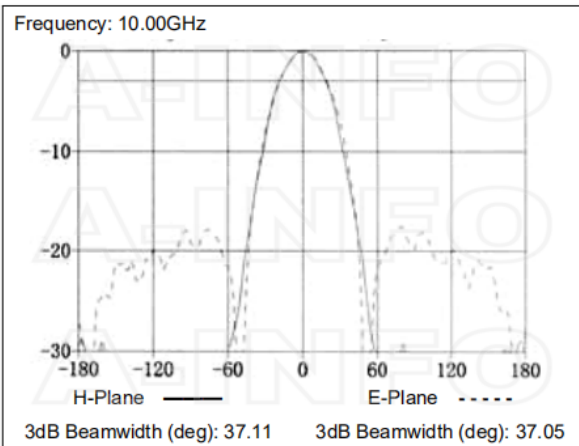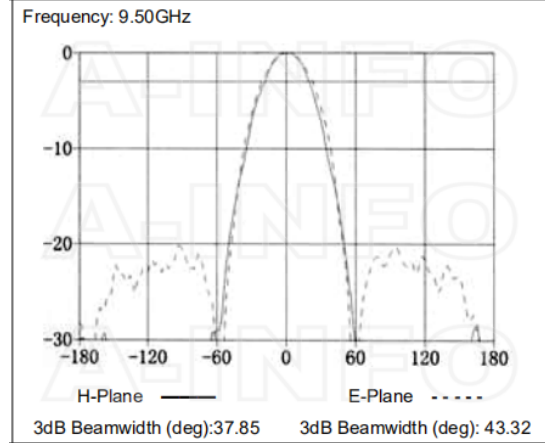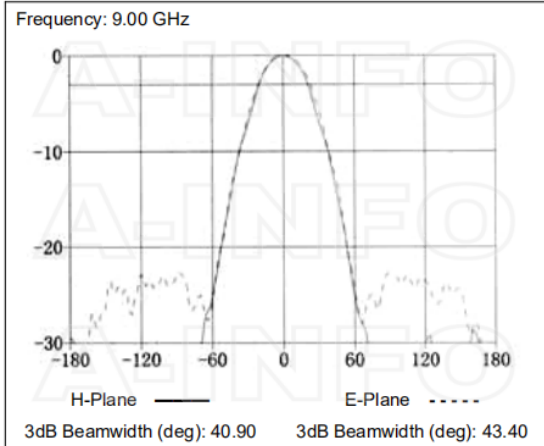

Related Products



112WCAN Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to N Type Female



112WCANM Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to N Type Male



112WCAS Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to SMA Female



112WCASM Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to SMA Male



112WCAT Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to TNC Female



112WCATM Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to TNC Male



112WCA7 Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 7mm



112WCA3.5 Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 3.5mm Female



112WCA3.5M Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 3.5mm Male



112WCAK Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 2.92mm Female



112WCAKM Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 2.92mm Male



112WCA2.4 Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 2.4mm Female




112WCA2.4M Right Angle Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 2.4mm Male



112WECAN Endlaunch Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to N Type Female



112WECAS Endlaunch Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to SMA Female



112WECAK Endlaunch Rectangular Waveguide to Coaxial Adapter 7.05-10GHz WR112 to 2.92mm Female



M4x18 Hex_Pack WR112- WR51 Flange Assembly Pack


Similar Products



LB-112-10-ASPO Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain Rectangular Waveguide
Interface



LB-112-10-C-NF Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain N Type Female



LB-112-10-C-NFSPO Standard
Gain Horn Antenna 7.05-10GHz
10dB Gain N Type Female




LB-112-10-C-SF Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain SMA Female



LB-112-10-C-SFSPO Standard
Gain Horn Antenna 7.05-10GHz
10dB Gain SMA Female




LB-112-10-C-TF Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain TNC Female



LB-112-10-C-TFSPO Standard
Gain Horn Antenna 7.05-10GHz
10dB Gain TNC Female



LB-112-10-C-7 Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain 7mm

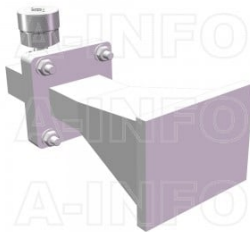

LB-112-10-C-7SPO Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain 7mm Female



LB-112-10-C-3.5F Standard Gain
Horn Antenna 7.05-10GHz 10dB
Gain 3.5mm Female



LB-112-10-C-3.5FSPO Standard
Gain Horn Antenna 7.05-10GHz
10dB Gain 3.5mm Female

About this Datasheet

• Product Information

Product Link:
<https://www.ainfoinc.com/lb-112-10-a-standard-gain-horn-antenna-7-05-10-ghz-10db-gain-fbp84>
Data subject to change without notice.

© A-INFO INC. 2023. All Rights Reserved

• Contact Us

Address:dd
60 Tesla, Irvine, CA 92618,
USA

Website:
www.ainfoinc.com

Email:
sales@ainfoinc.com

• Phone & Fax

Phone:
+1-949-639-9688
+1-949-639-9608

Fax:
+1-949-639-9670