



LB-12-25-A Standard Gain Horn Antenna 60-90GHz 25dB Gain Rectangular Waveguide Interface

Standard Gain Horn Antenna Operating From 60GHz to 90GHz With a Nominal 25dB Gain With Rectangular Waveguide Interface

Product Information

SKU	LB-12-25-A
-----	------------

Description

Standard Gain Horn Antenna LB-12-25-A, operating from 60 to 90GHz with a nominal 25dB gain and low VSWR 1.1:1 with FUGP740 output. The model LB-12-25-A has uniform gain through its frequency span, providing efficient performance characteristics and directionality. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	60	Output Type	Waveguide
Frequency, Max (GHz)	90	Flange Style	Round
Waveguide Type	Rectangular	Flange Type	Cover
Waveguide Size EIA WR	WR12	Flange Designation	FUGP740(UG-387/U)
Gain, Typ (dBi)	25	Mechanical Specification	
Polarization	Linear	Figure	A Type
3dB Beamwidth, E-Plane, Typ (Deg.)	9	Body Material	Cu
3dB Beamwidth, H-Plane, Typ (Deg.)	10	Finish	Gold Plated
Cross Pol. Isolation, Typ (dB)	35	Size, W (mm)	30.8
VSWR, Typ	1.1:1	Size, H (mm)	24.8
		Size, L (mm)	82
		Weight, (kg)	0.05

Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	---	--------------	---

Outline Drawing

FUGP740 Output (P/N: LB-12-25-A)

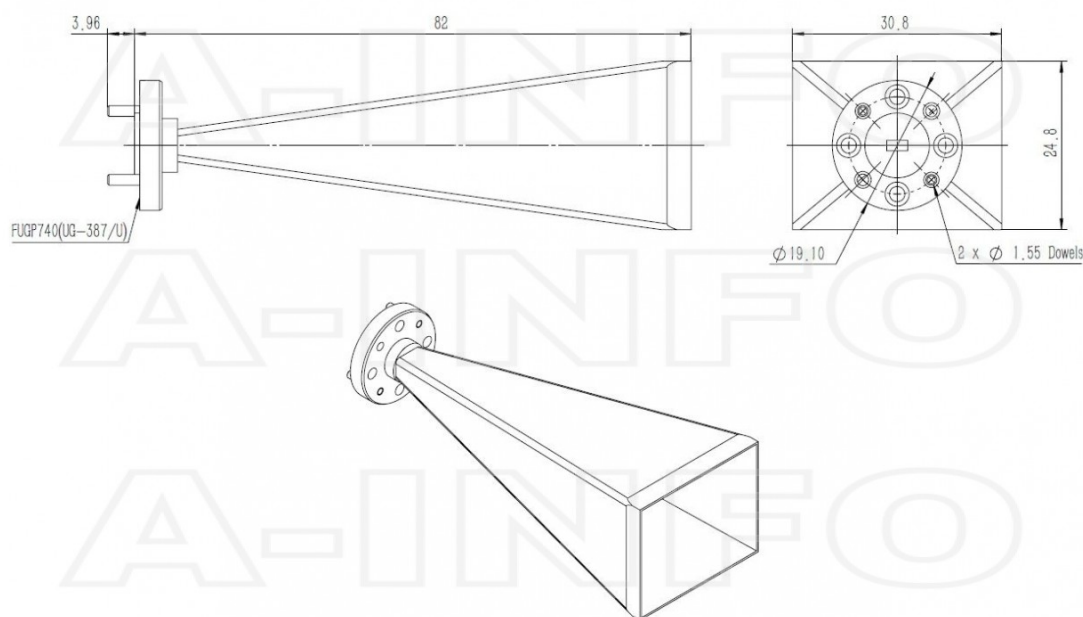


Flange Drawing

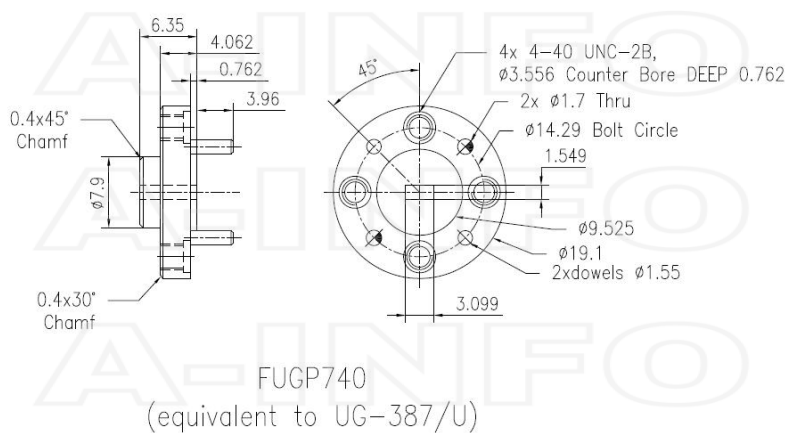


Typical Test Results

Gain

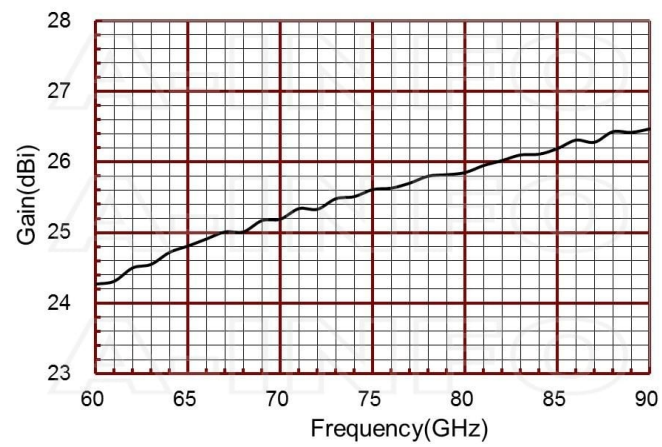


Antenna Factor

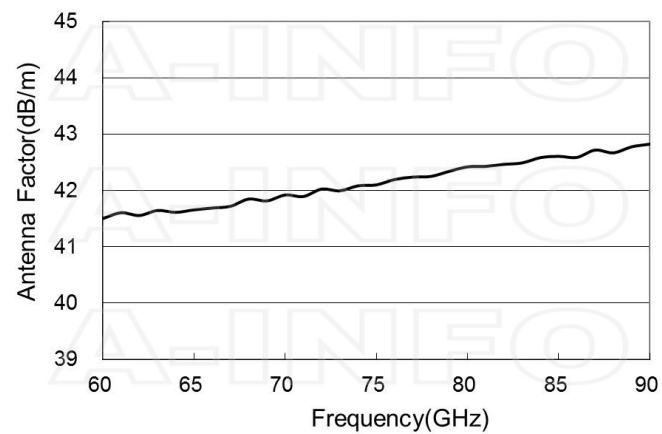


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
60	24.27	41.50
61	24.31	41.61
62	24.50	41.56
63	24.55	41.65
64	24.72	41.61
65	24.81	41.66
66	24.91	41.69
67	25.01	41.72
68	25.01	41.85
69	25.17	41.82
70	25.19	41.92
71	25.34	41.90
72	25.33	42.03
73	25.48	42.00
74	25.51	42.08
75	25.61	42.10
76	25.63	42.20
77	25.70	42.24
78	25.80	42.25
79	25.82	42.34
80	25.85	42.42
81	25.95	42.43
82	26.02	42.47
83	26.10	42.49
84	26.11	42.59
85	26.19	42.61
86	26.31	42.59
87	26.28	42.72
88	26.43	42.67
89	26.42	42.78
90	26.47	42.82




Cross Polarization Isolation

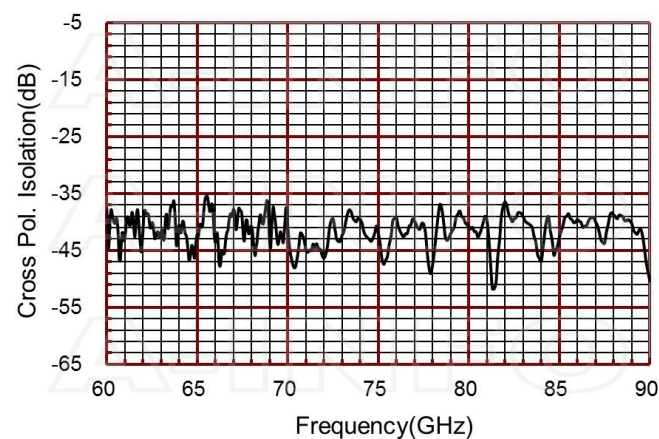

VSWR

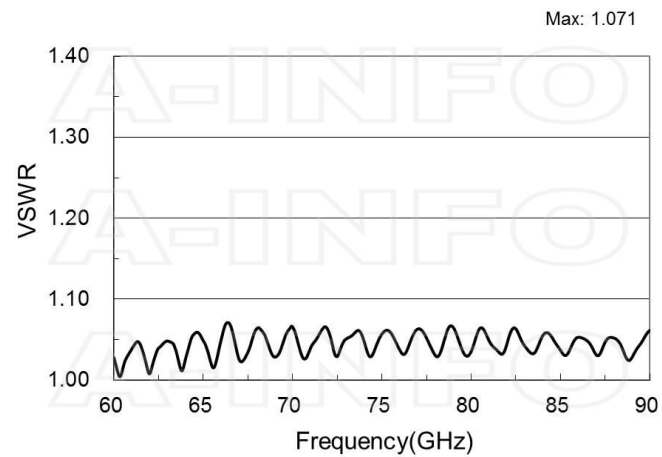

Pattern

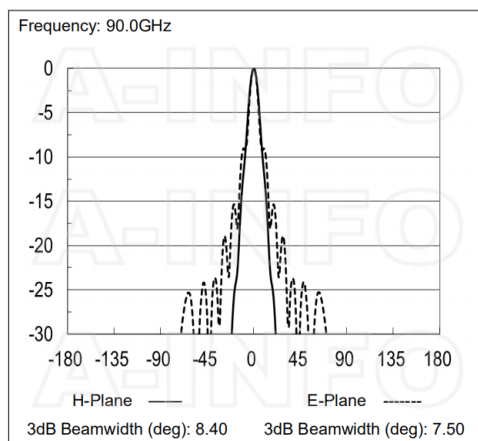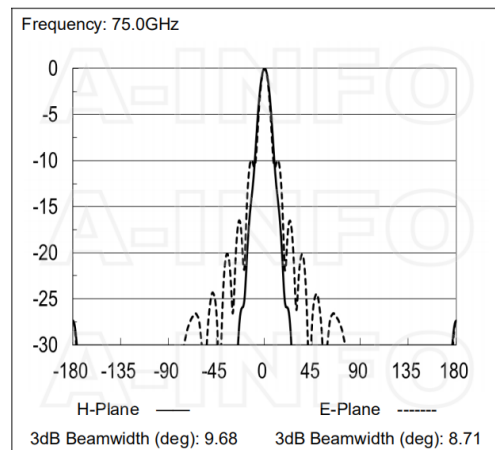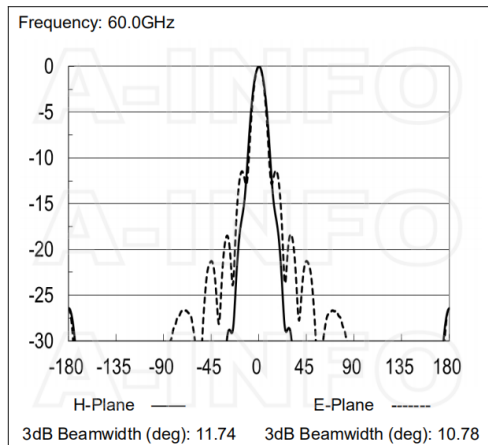

Related Products



12WCA1.0_Cu Right Angle Rectangular Waveguide to Coaxial Adapter 60-90GHz WR12 to 1.0mm Female



12WCA1.0M_Cu Right Angle Rectangular Waveguide to Coaxial Adapter 60-90GHz WR12 to 1.0mm Male



12WECA1.0_Cu Endlaunch Rectangular Waveguide to Coaxial Adapter 60-90GHz WR12 to 1.0mm Female




12WECA1.0M_Cu Endlaunch Rectangular Waveguide to Coaxial Adapter 60-90GHz WR12 to 1.0mm Male



HSCS_4-40UNC_Pack Assembly Pack

Similar Products



LB-12-25-ASPO Standard Gain Horn Antenna 60-90GHz 25dB Gain Rectangular Waveguide Interface



LB-12-25-C-1.0F Standard Gain Horn Antenna 60-90GHz 25dB Gain 1.0mm Female



LB-12-25-C-1.0FSPO Standard Gain Horn Antenna 60-90GHz 25dB Gain 1.0mm Female



LB-12-25-C-E1.0F Standard Gain Horn Antenna 60-90GHz 25dB Gain Endlaunch 1.0mm Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-12-25-a-standard-gain-horn-antenna-60-90-ghz-25db-gain-fugp740 Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address: 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
--	---	---