


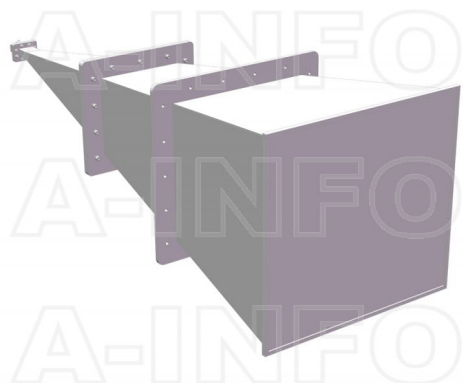

LB-137-25-C-SFSP0 Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain SMA Female

Standard Gain Horn Antenna Operating From 5.85GHz to 8.2GHz With a Nominal 25dB Gain With SMA Female Connector

Product Information

SKU	LB-137-25-C-SFSP0
-----	-------------------

Description

Standard Gain Horn Antenna LB-137-25-C-SFSP0, operating from 5.85 to 8.2GHz with a nominal 25dB gain and low VSWR 1.25:1 with SMA Female connector output. The model LB-137-25-C-SFSP0 has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 50W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	5.85	Output Type	Coaxial
Frequency, Max (GHz)	8.2	Connector	SMA
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR137	Mechanical Specification	
Gain, Typ (dBi)	25	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Typ (Deg.)	7	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	8	Size, W (mm)	462
Cross Pol. Isolation, Typ (dB)	40	Size, H (mm)	432
VSWR, Typ	1.25:1	Size, L (mm)	1452
Impedance, (Ohm)	50	Weight, (kg)	14.7
Power Handling, CW, (W)	50		
Power Handling, Peak, (W)	3000		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


SMA Female Output with Radome (Option, P/N: LB-137-25-C-SFSPO, Outdoor Application)

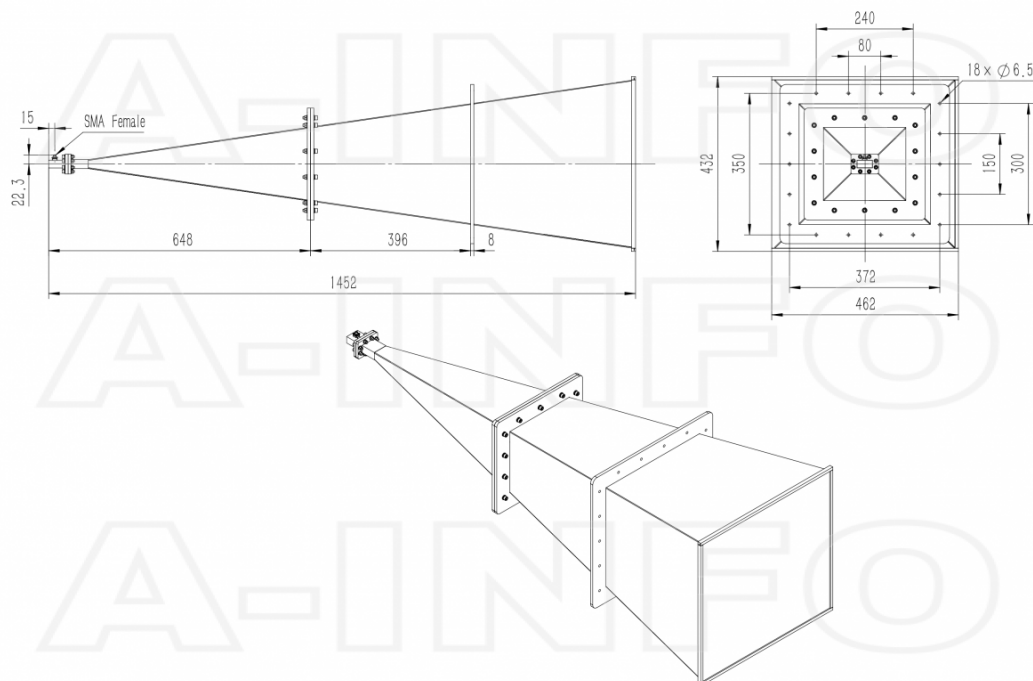

SMA Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-137-25-MB2 & LB- 137-25-C-SFSP0, Outdoor Application)

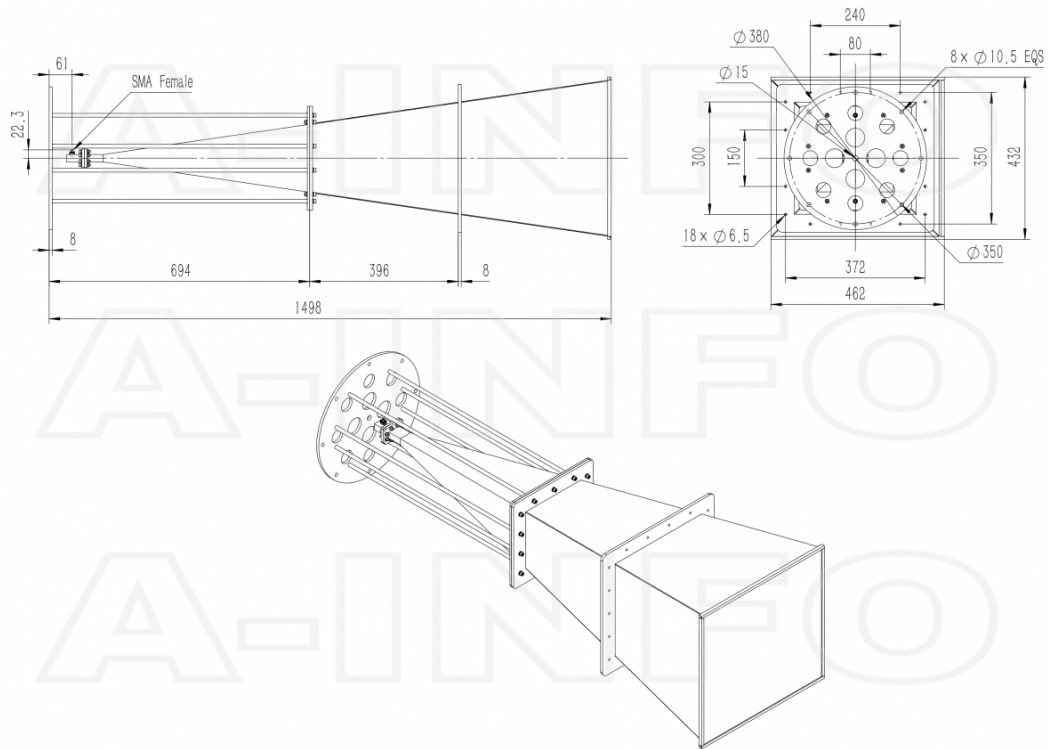


SMA Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-137-25-L2 & LB- 137-25-C-SFSP0, Outdoor Application)

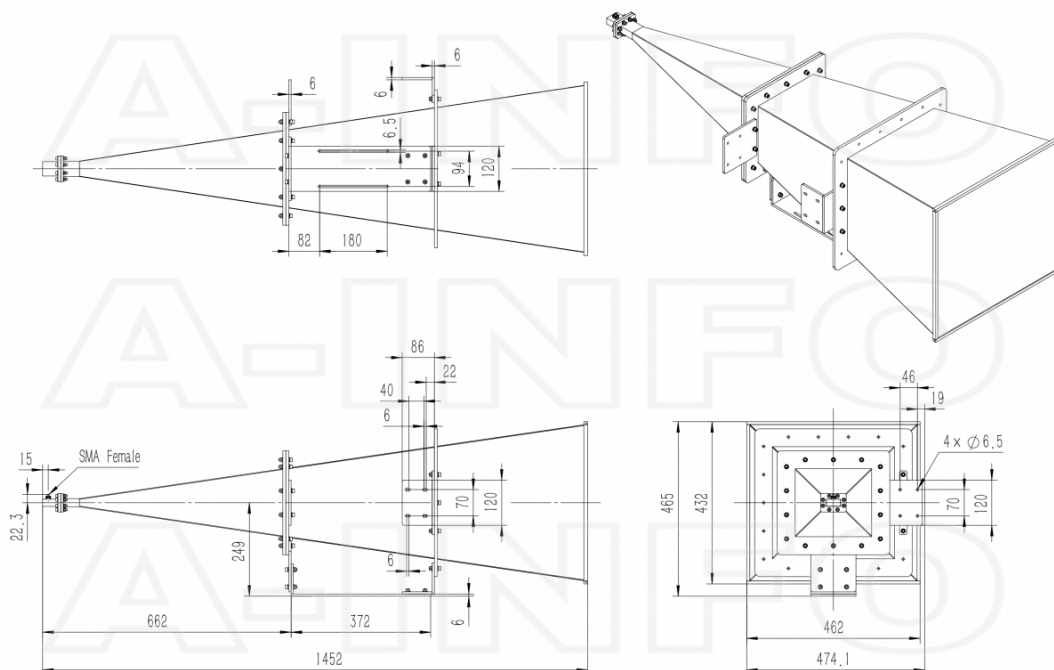


Typical Test Results

Gain

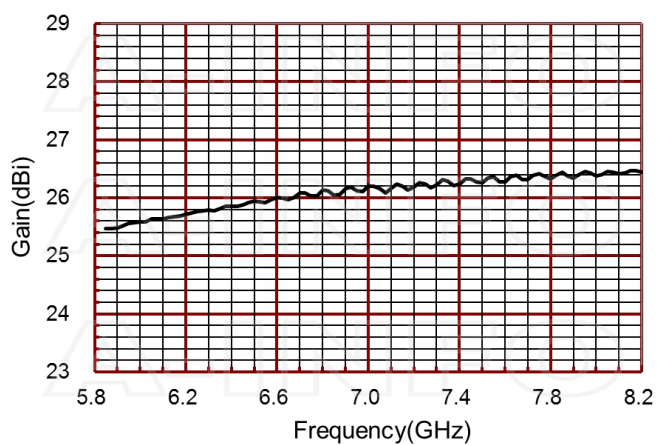


Antenna Factor

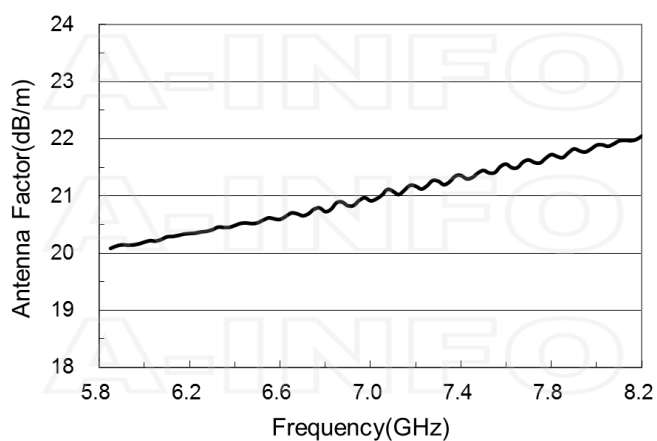



Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)	Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
5.85	25.47	20.08	7.10	26.16	21.08
5.90	25.48	20.15	7.20	26.19	21.17
6.00	25.58	20.19	7.30	26.22	21.26
6.10	25.63	20.29	7.40	26.24	21.36
6.20	25.72	20.34	7.50	26.26	21.45
6.30	25.79	20.41	7.60	26.27	21.56
6.40	25.85	20.48	7.70	26.31	21.63
6.50	25.94	20.53	7.80	26.33	21.73
6.60	26.01	20.59	7.90	26.34	21.82
6.70	26.08	20.65	8.00	26.38	21.89
6.80	26.14	20.72	8.10	26.41	21.97
6.90	26.16	20.83	8.20	26.44	22.05
7.00	26.20	20.91			

VSWR

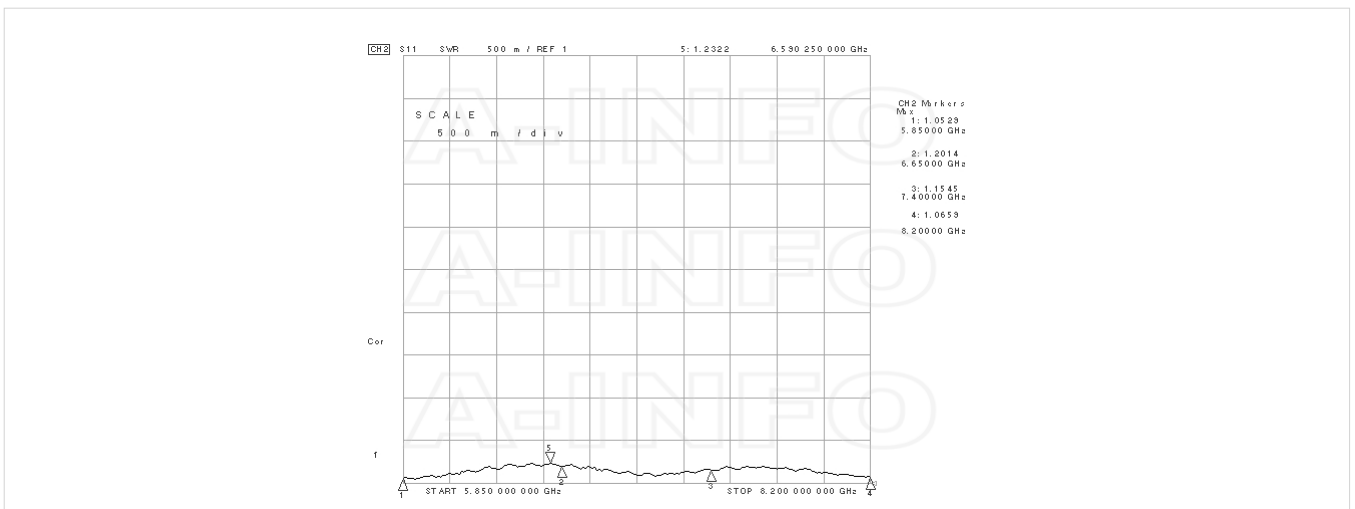

Pattern

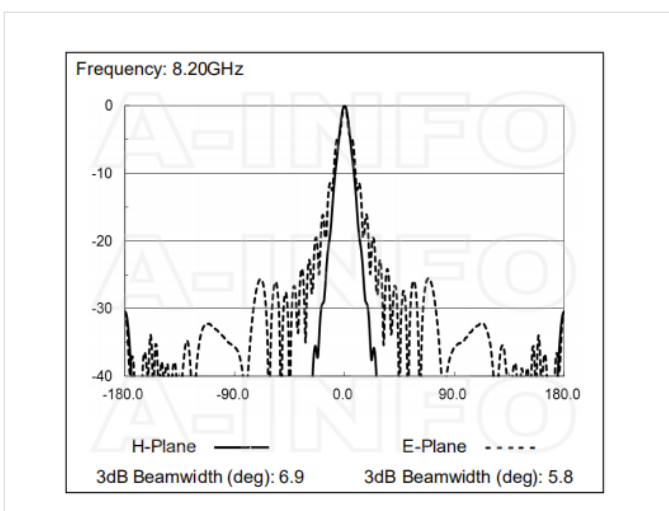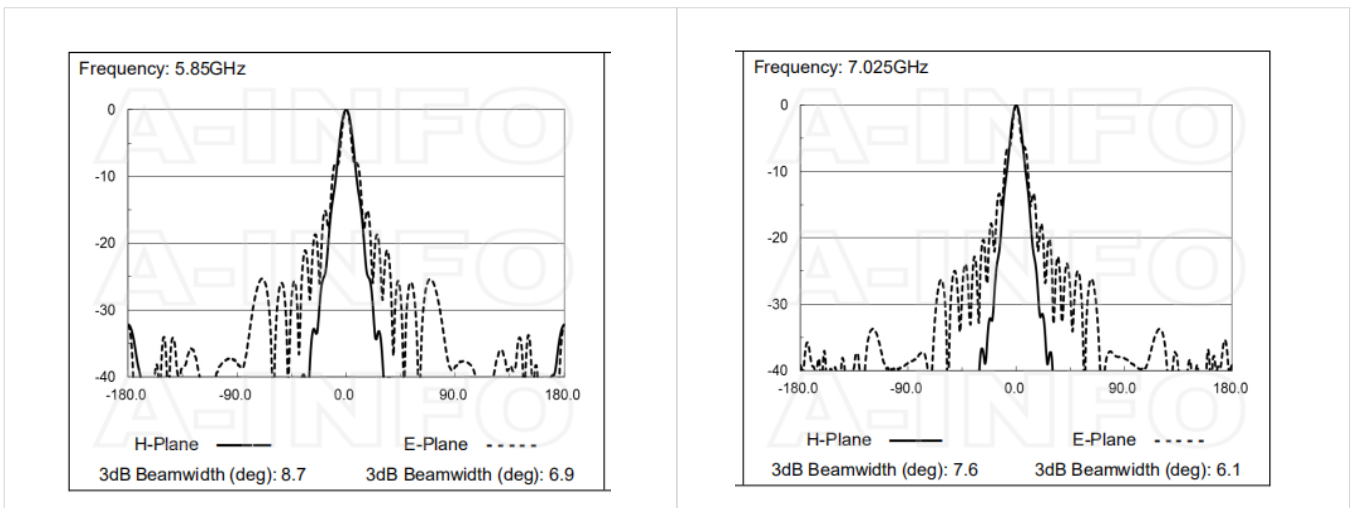

Related Products



LB-137-25-MB2 Round Type Mounting Bracket



LB-137-25-L2 L type mounting bracket



SM-SM-A050-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-20000 Flexible Cable Assembly 20000mm DC- 26.5GHz SMA Male to SMA Male

Similar Products




LB-137-25-A Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain Rectangular Waveguide Interface



LB-137-25-ASPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain Rectangular Waveguide Interface



LB-137-25-C-NF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain N Type Female

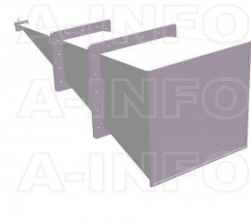


LB-137-25-C-NFSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain N Type Female



LB-137-25-C-SF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain SMA Female




LB-137-25-C-TF Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain TNC Female



LB-137-25-C-TFSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain TNC Female




LB-137-25-C-7 Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 7mm



LB-137-25-C-7SPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 7mm



LB-137-25-C-3.5F Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 3.5mm Female



LB-137-25-C-3.5FSPO Standard Gain Horn Antenna 5.85-8.2GHz 25dB Gain 3.5mm Female

About this Datasheet

● Product Information

Product Link:
<https://www.ainfoinc.com/lb-137-25-c-sfspo-standard-gain-horn-antenna-5-85-8-2-ghz-25db-gain-sma-female>
 Data subject to change without notice.
 © A-INFO INC. 2023. All Rights Reserved

● Contact Us

Address:dd
 60 Tesla, Irvine, CA 92618,
 USA

Website:
www.ainfoinc.com

Email:
sales@ainfoinc.com

● Phone & Fax

Phone:
 +1-949-639-9688
 +1-949-639-9608

Fax:
 +1-949-639-9670