


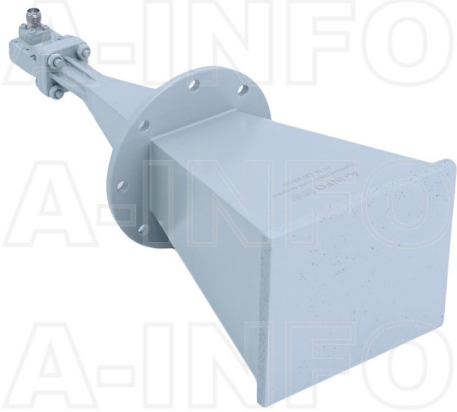

LB-28-25-C2-KFSPO Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.92mm Female

Standard Gain Horn Antenna Operating From 26.5GHz to 40GHz With a Nominal 25dB Gain With 2.92mm Female Connector

Product Information

SKU	LB-28-25-C2-KFSPO	Patents	ZL201830355372.5 (China)
-----	-------------------	---------	--------------------------

Description

Standard Gain Horn Antenna LB-28-25-C2-KFSPO, operating from 26.5 to 40GHz with a nominal 25dB gain and low VSWR 1.25:1 with 2.92mm Female connector output. The model LB-28-25-C2-KFSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 20W continuously and 40W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	26.5	Output Type	Coaxial
Frequency, Max (GHz)	40	Connector	2.92mm(K)
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR28	Mechanical Specification	
Gain, Typ (dBi)	25	Figure	C Type
Polarization	Linear	Body Material	Cu
3dB Beamwidth, E-Plane, Typ (Deg.)	9	Finish	Gold Plated and Passivation, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	11	Size, W (mm)	76.6
Cross Pol. Isolation, Typ (dB)	30	Size, H (mm)	70
VSWR, Typ	1.25:1	Size, L (mm)	198.5
Impedance, (Ohm)	50	Weight, (kg)	0.4
Power Handling, CW, (W)	20		
Power Handling, Peak, (W)	40		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


2.92mm-Female Output with Radome (Option, P/N: LB-28-25-C2-KFSPO, Application Outdoor)

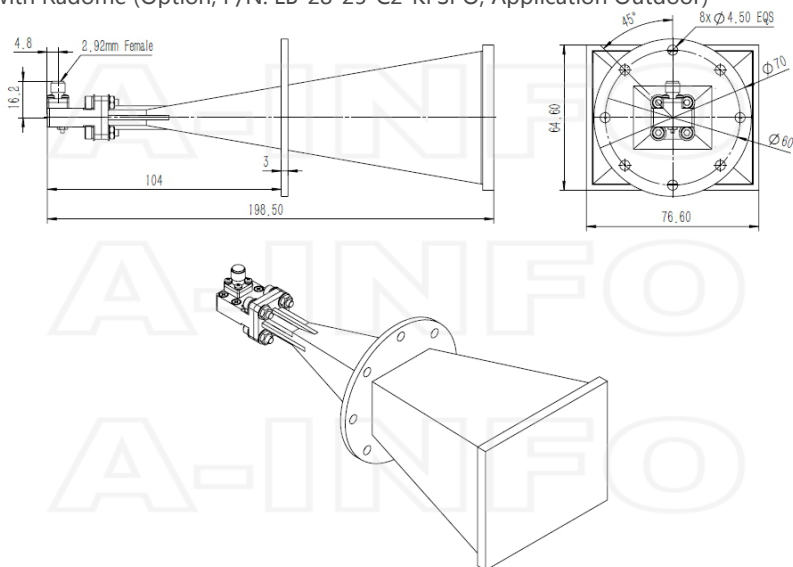

2.92mm-Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-28-25-MB2 & LB-28-25-C2-KFSPO, Application Outdoor)

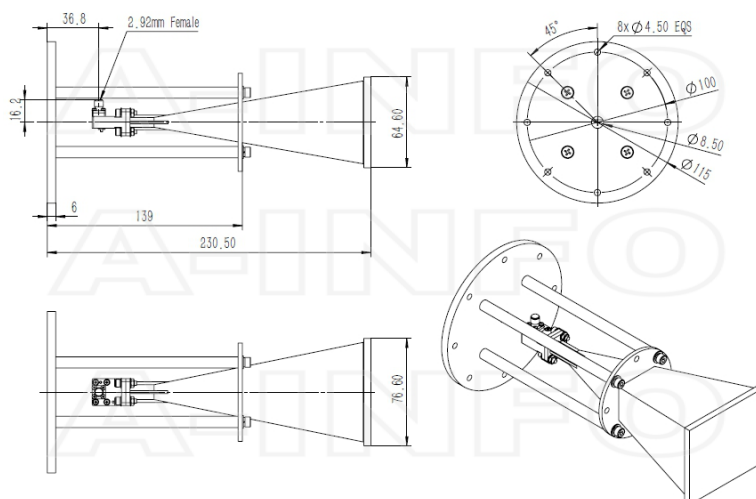


2.92mm-Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-28-25-L2 & LB-28-25-C2-KFSPO, Application Outdoor)

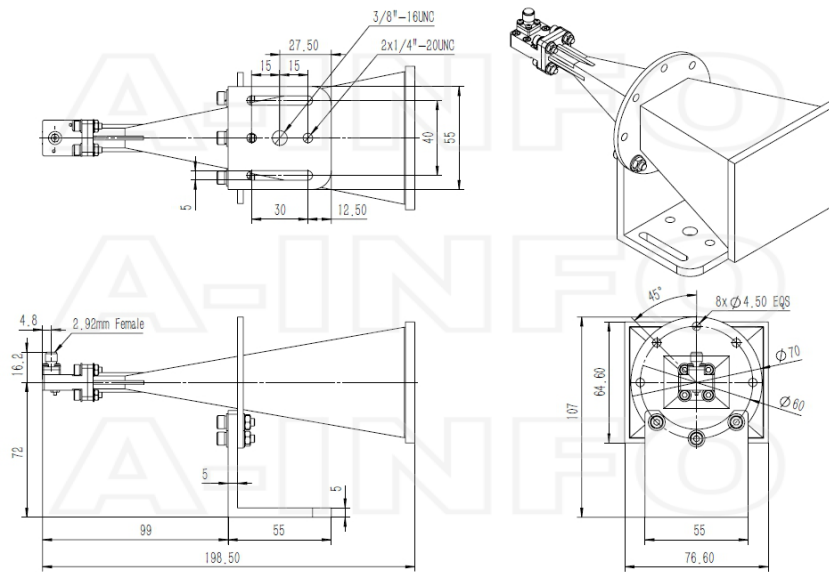


Typical Test Results

Gain

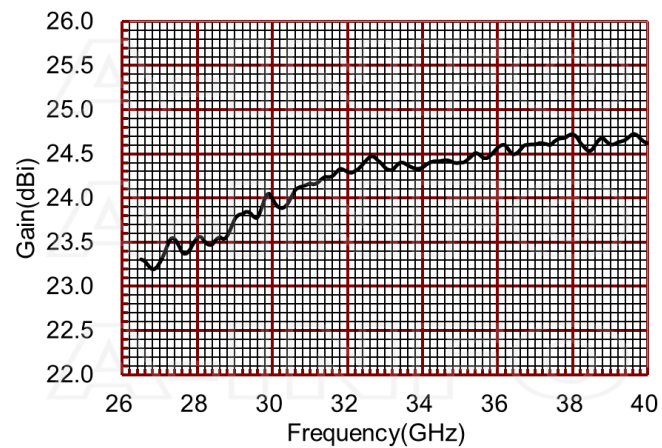


Antenna Factor

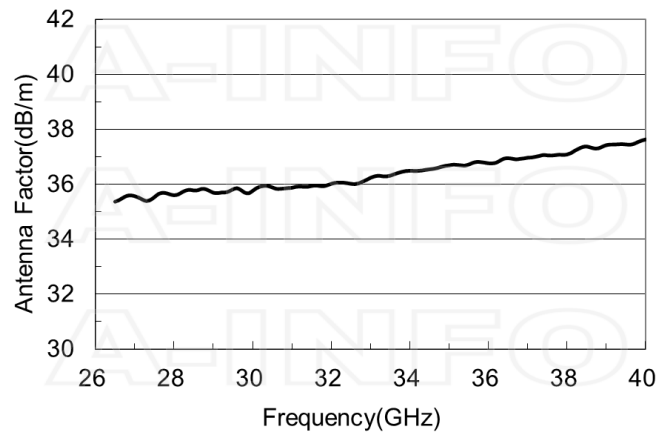


Antenna Factor (Table)

Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)		Frequency (GHz)	Gain (dBi)	Antenna Factor (dB/m)
26.50	23.31	35.37		33.50	24.40	36.31
27.00	23.27	35.57		34.00	24.35	36.49
27.50	23.47	35.53		34.50	24.42	36.54
28.00	23.55	35.60		35.00	24.40	36.69
28.50	23.53	35.78		35.50	24.50	36.72
29.00	23.76	35.69		36.00	24.57	36.76
29.50	23.79	35.82		36.50	24.51	36.95
30.00	23.99	35.76		37.00	24.61	36.97
30.50	24.01	35.89		37.50	24.64	37.05
31.00	24.16	35.87		38.00	24.72	37.08
31.50	24.24	35.94		38.50	24.54	37.38
32.00	24.30	36.02		39.00	24.61	37.42
32.50	24.43	36.02		39.50	24.69	37.45
33.00	24.34	36.24		40.00	24.62	37.63





Cross Polarization Isolation






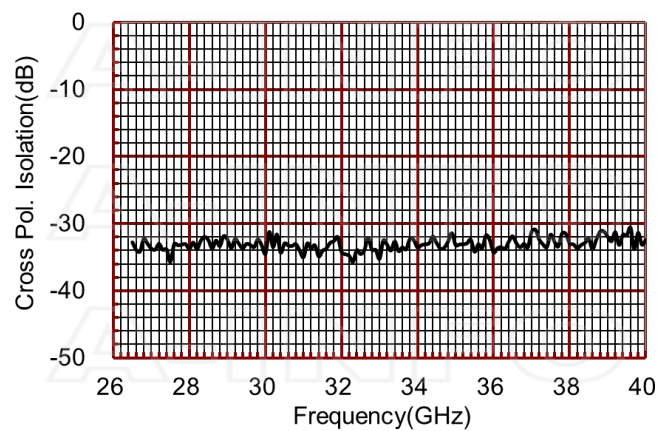








VSWR






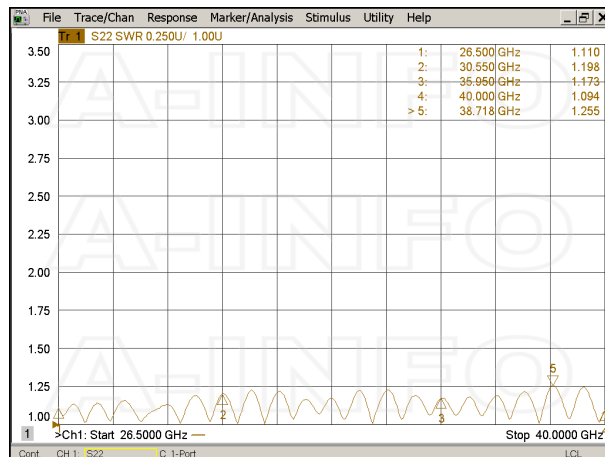








Pattern

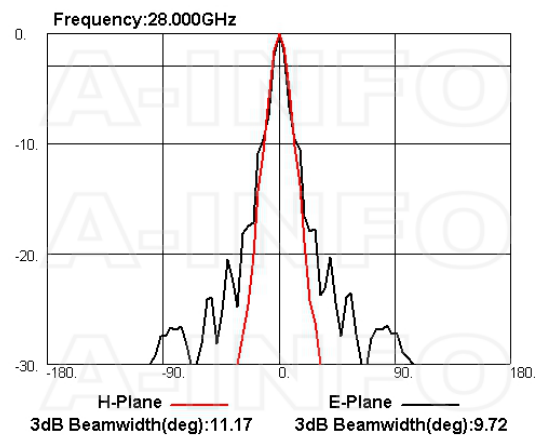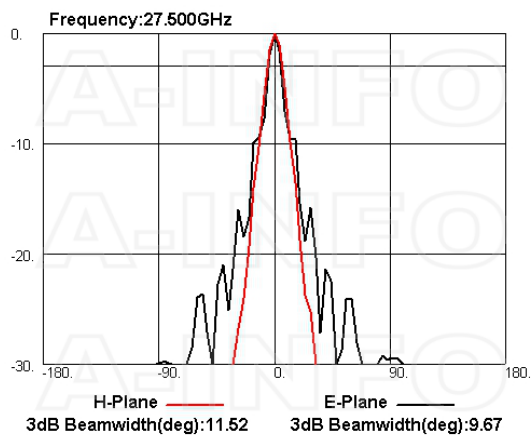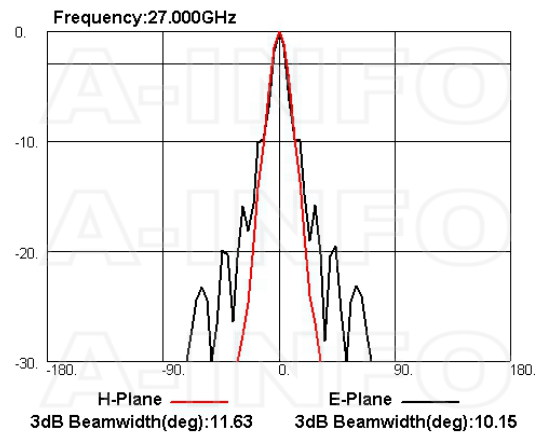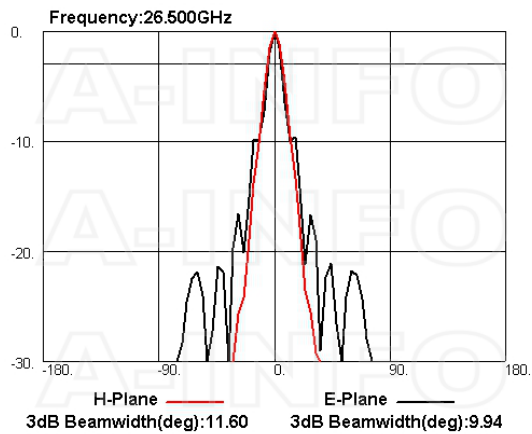

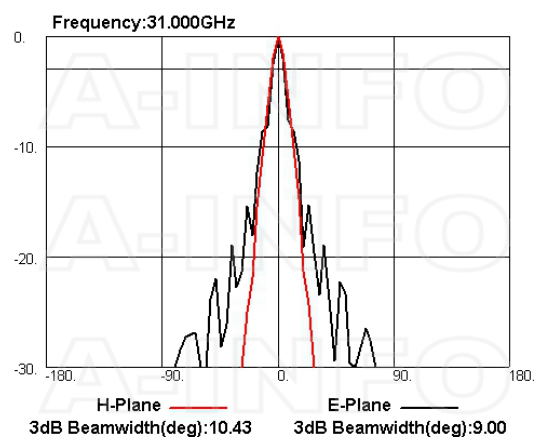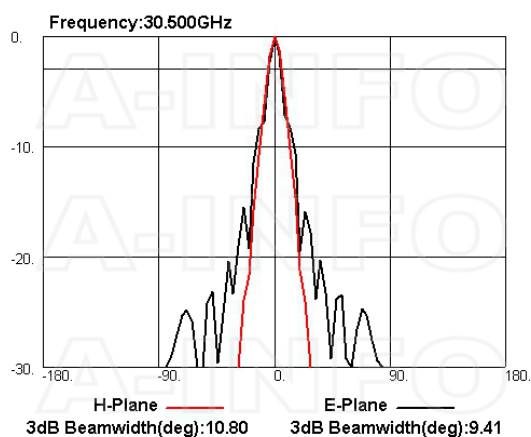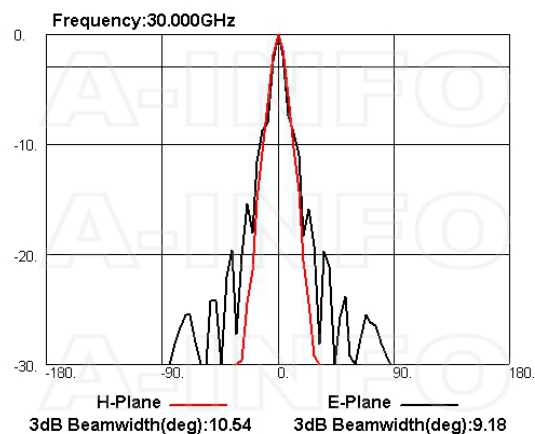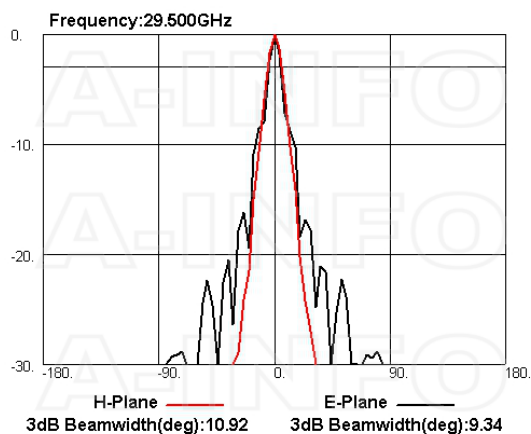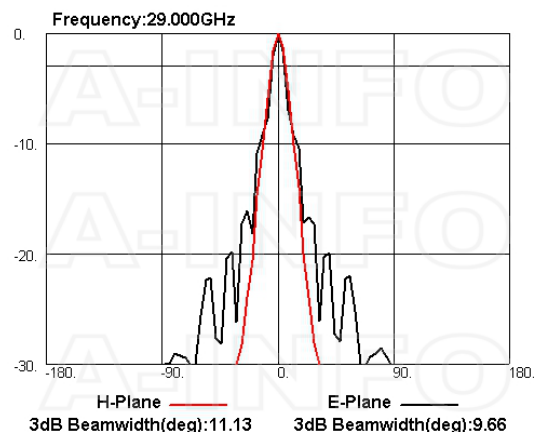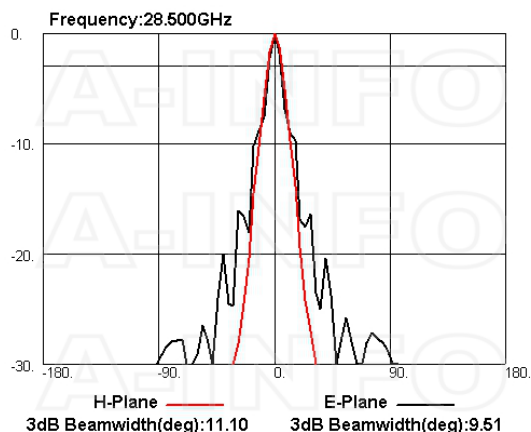

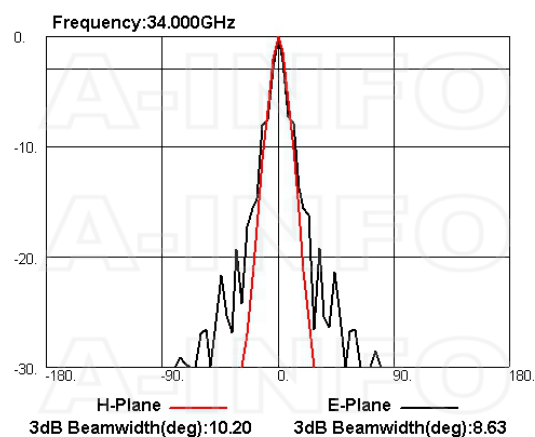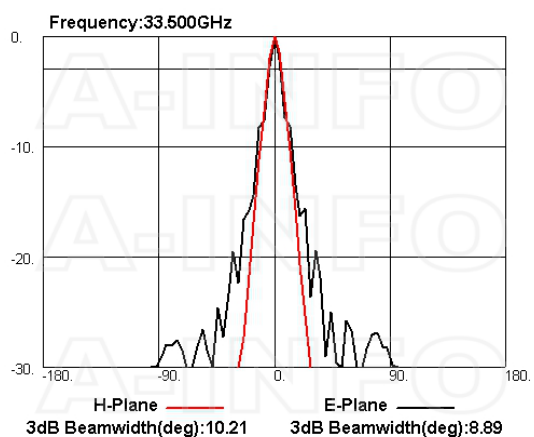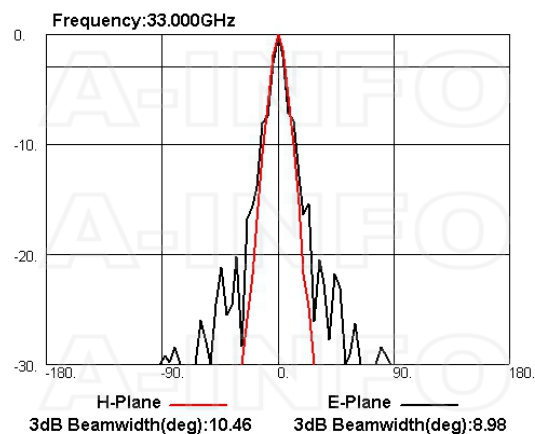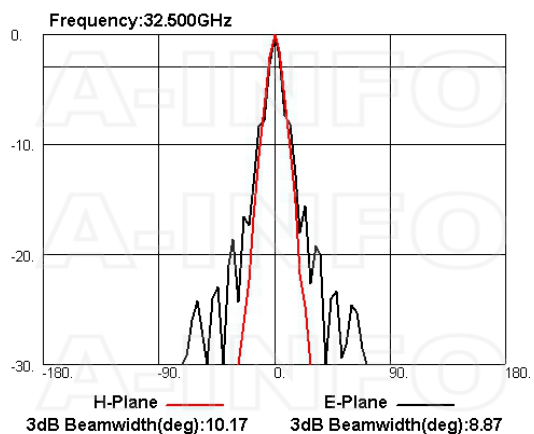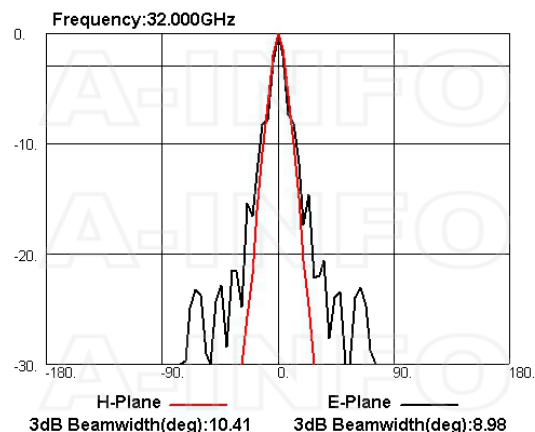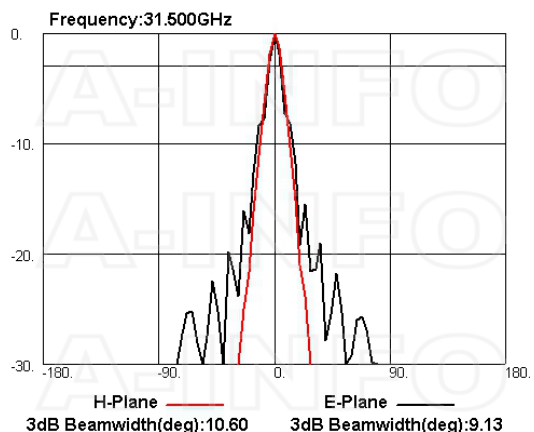

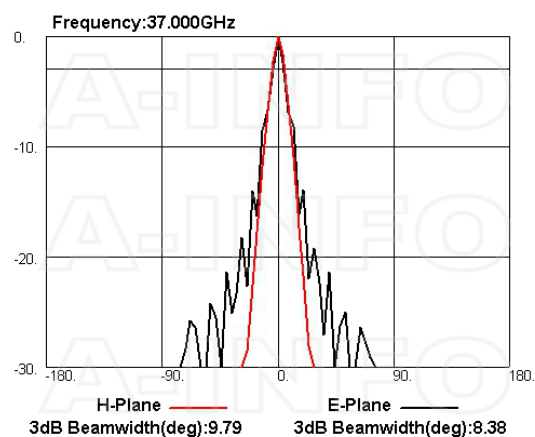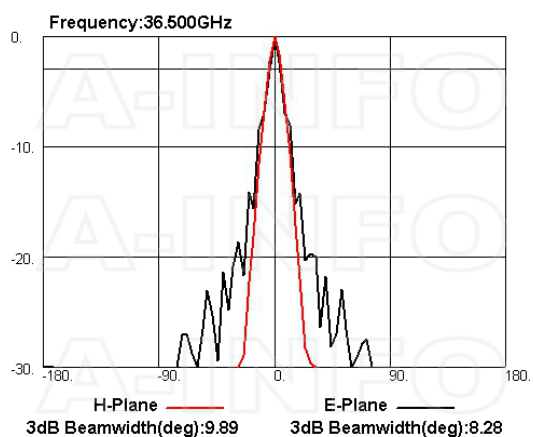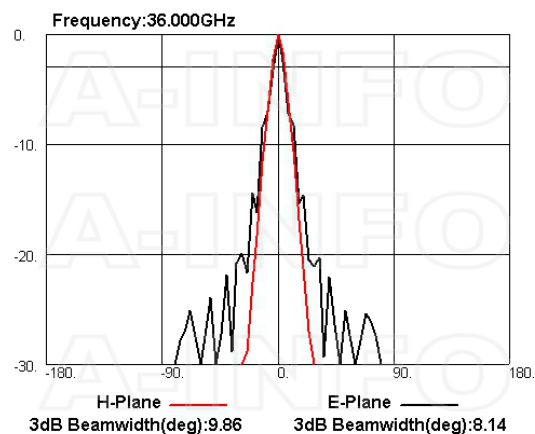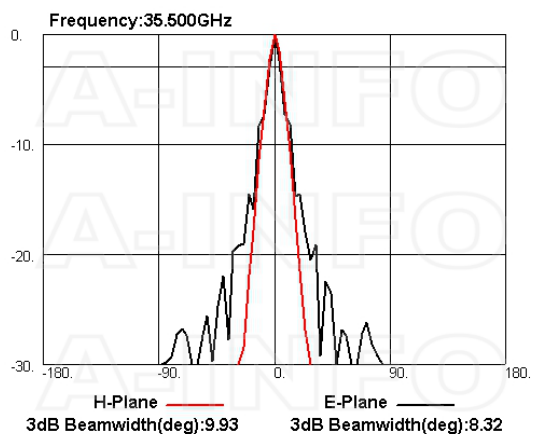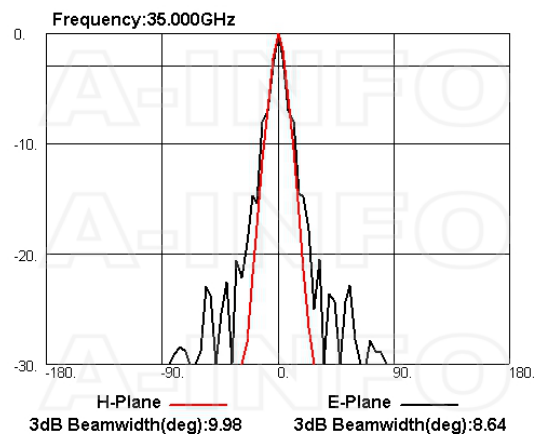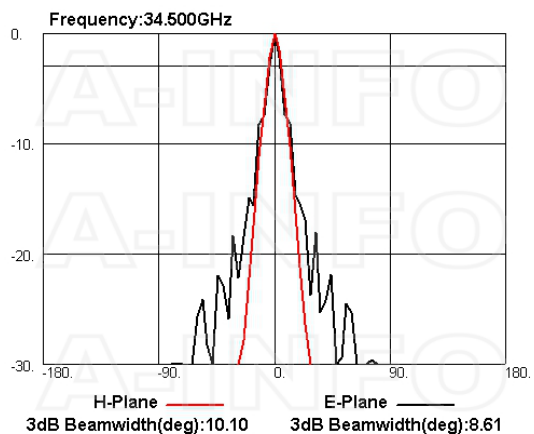

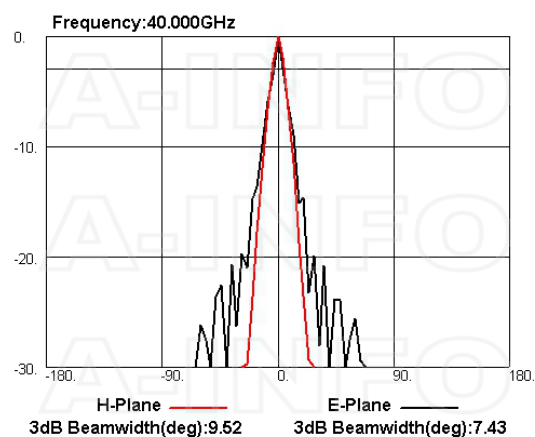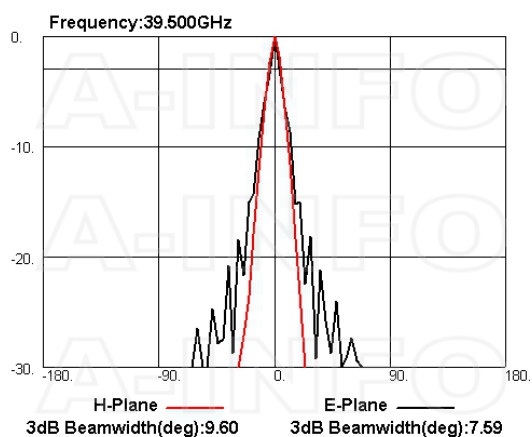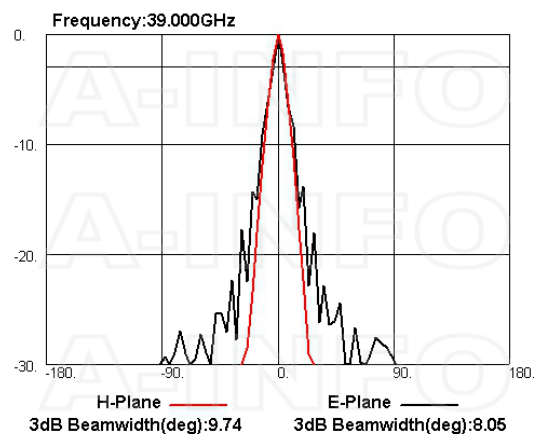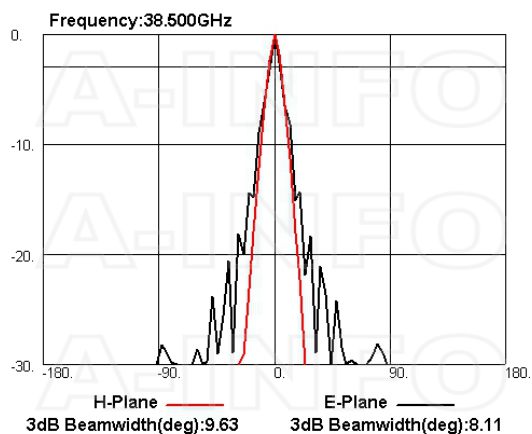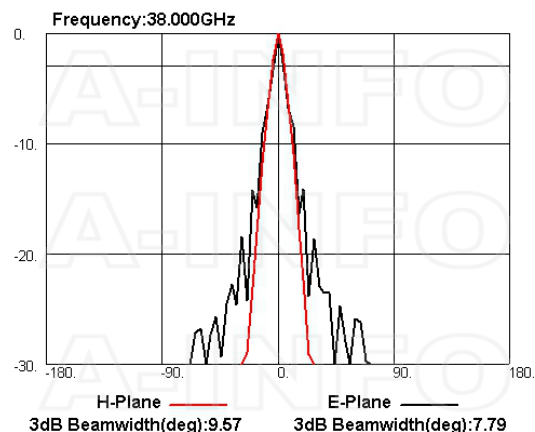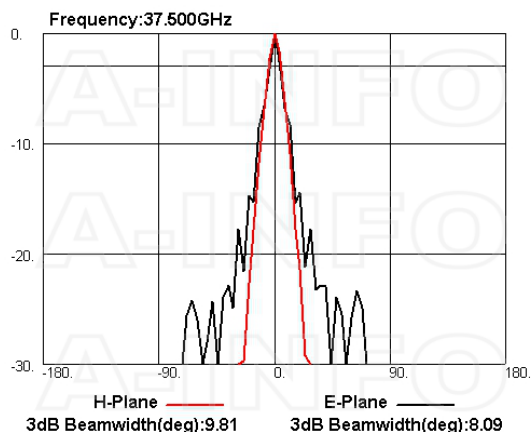

Related Products



LB-28-25-MB2 Round type mounting bracket



LB-28-25-L2 L type mounting bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



Carrying Case_LB-28-25-C2 Al Alloy Carrying Case



M3x12 Hex_Pack WR28 Flange Assembly Pack



2.92M-2.92M-A050-500 Flexible Cable Assembly 500mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-1000 Flexible Cable Assembly 1000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-1500 Flexible Cable Assembly 1500mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-2000 Flexible Cable Assembly 2000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-3000 Flexible Cable Assembly 3000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-5000 Flexible Cable Assembly 5000mm DC-40GHz 2.92mm Male to 2.92mm Male




2.92M-2.92M-A050-10000 Flexible Cable Assembly 10000mm DC-40GHz 2.92mm Male to 2.92mm Male

Similar Products



LB-28-25-A2 Standard Gain Horn Antenna 26.5-40GHz 25dB Gain Rectangular Waveguide Interface



LB-28-25-A2SPO Standard Gain Horn Antenna 26.5-40GHz 25dB Gain Rectangular Waveguide Interface



LB-28-25-C2-KF Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.92mm Female




LB-28-25-C2-2.4F Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.4mm Female



LB-28-25-C2-2.4FSPO Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.4mm Female



LB-28-25-C2-EKF Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.92mm Female



LB-28-25-C2-EKFSPO Standard Gain Horn Antenna 26.5-40GHz 25dB Gain 2.92mm Female

About this Datasheet

- Product Information

Product Link:
<https://www.ainfoinc.com/lb-28-25-c2-kfspo-standard-gain-horn-antenna-26-5-40-ghz-25db-gain-2-92mm-female>
 Data subject to change without notice.
 © A-INFO INC. 2023. All Rights Reserved

- Contact Us

Address:dd
 60 Tesla, Irvine, CA 92618,
 USA

Website:
www.ainfoinc.com

Email:
sales@ainfoinc.com

- Phone & Fax

Phone:
 +1-949-639-9688
 +1-949-639-9608

Fax:
 +1-949-639-9670