


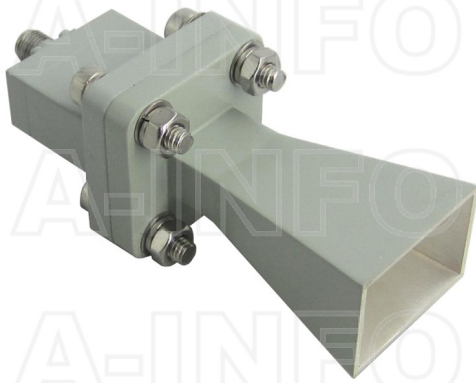

LB-51-10-C-ESF Standard Gain Horn Antenna 15-22GHz 10dB Gain
Endlaunch SMA Female

Standard Gain Horn Antenna Operating From 15GHz to 22GHz With a
Nominal 10dB Gain With Endlaunch SMA Female Connector

Product Information

SKU	LB-51-10-C-ESF
-----	----------------

Description

Standard Gain Horn Antenna LB-51-10-C-ESF, operating from 15 to 22GHz with a nominal 10dB gain and low VSWR 1.25:1 with Endlaunch SMA Female connector output. The model LB-51-10-C-ESF has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 50W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	15	Output Type	Coaxial
Frequency, Max (GHz)	22	Connector	SMA
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR51	Mechanical Specification	
Gain, Typ (dBi)	10	Figure	C Type
Polarization	Linear	Body Material	Cu
3dB Beamwidth, E-Plane, Typ (Deg.)	49	Finish	Silver Plated, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	43	Size, W (mm)	30.2
Cross Pol. Isolation, Typ (dB)	35	Size, H (mm)	30.2
VSWR, Typ	1.25:1	Size, L (mm)	83.4
Impedance, (Ohm)	50	Weight, (kg)	0.19
Power Handling, CW, (W)	50		
Power Handling, Peak, (W)	3000		

Additional Information


Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	---	--------------	---

Outline Drawing


Endlaunch SMA Female Output (P/N: LB-51-10-C-ESF)

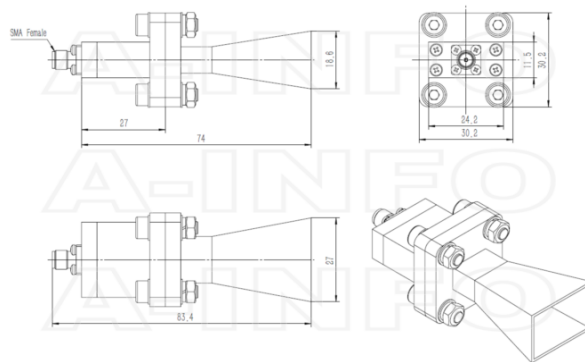

Endlaunch SMA Female Output with Round Mounting Bracket (Option, P/N: LB-51-10-C-MB)

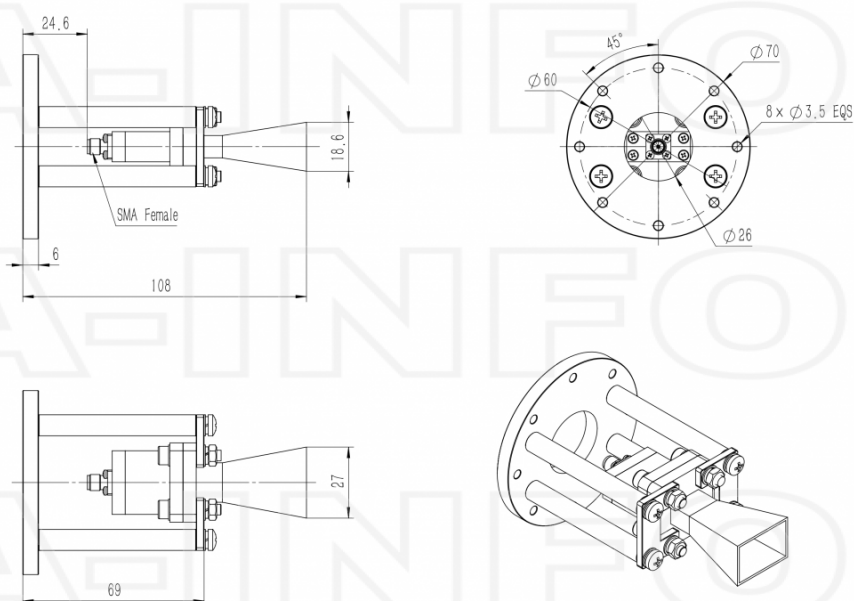


Endlaunch SMA Female Output with L Type Mounting Bracket (Option, P/N: LB-51-10-C-MBL)

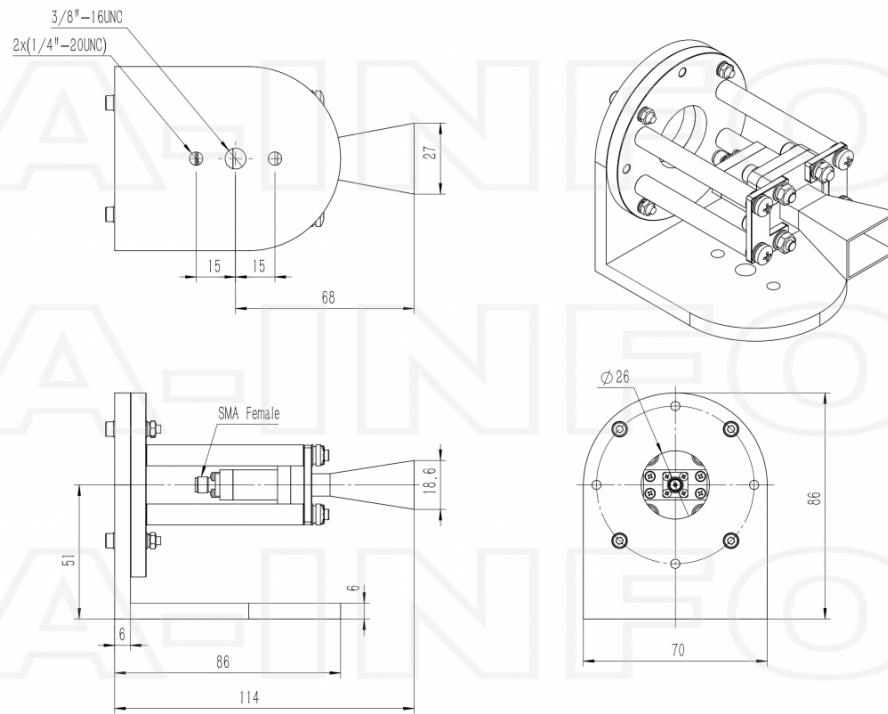


Typical Test Results

Gain

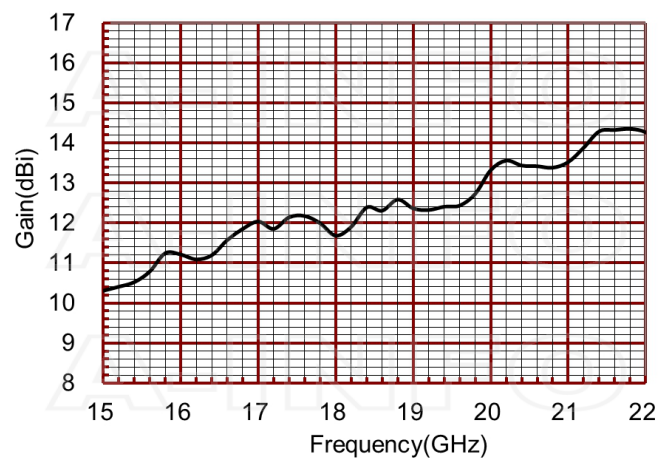


Antenna Factor

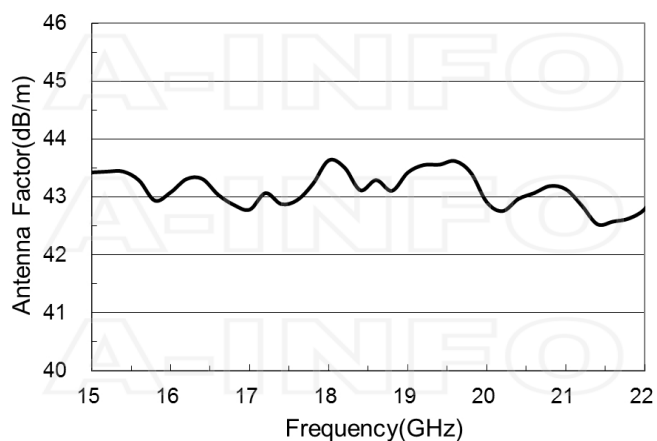


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
15.0	10.31	43.42
15.5	10.25	43.77
16.0	11.21	43.08
16.5	11.23	43.32
17.0	12.04	42.78
17.5	12.16	42.91
18.0	11.68	43.63
18.5	12.30	43.26
19.0	12.36	43.42
19.5	12.52	43.49
20.0	13.32	42.91
20.5	13.24	43.21
21.0	13.52	43.13
21.5	14.24	42.62
22.0	14.27	42.79





Cross Polarization Isolation






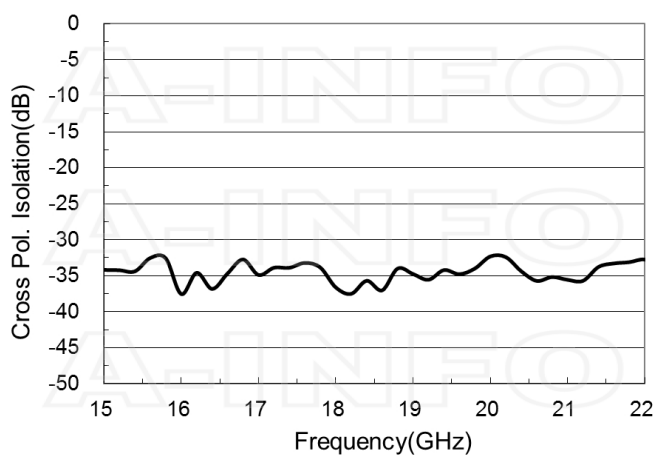







VSWR

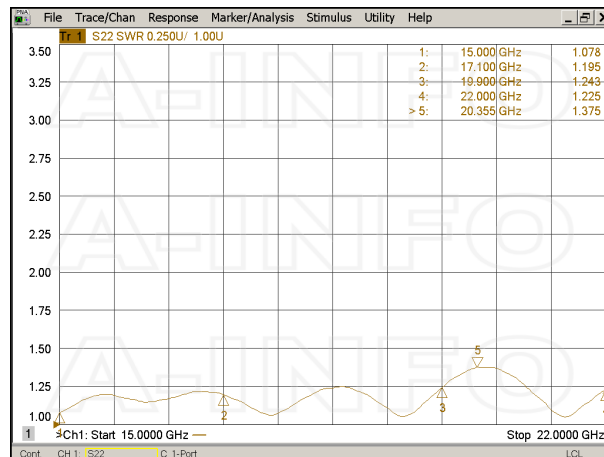

Pattern

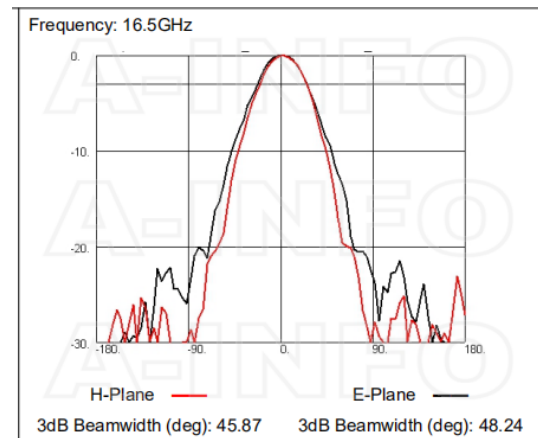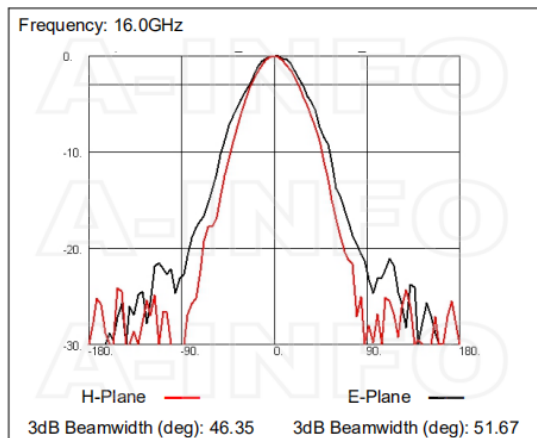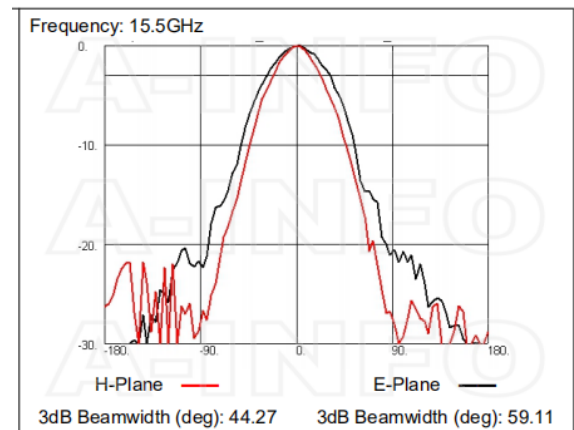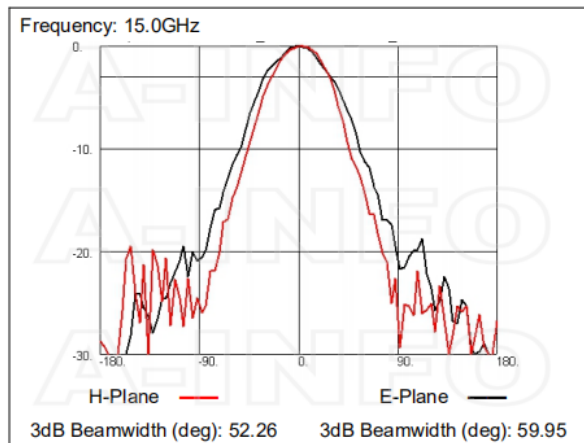

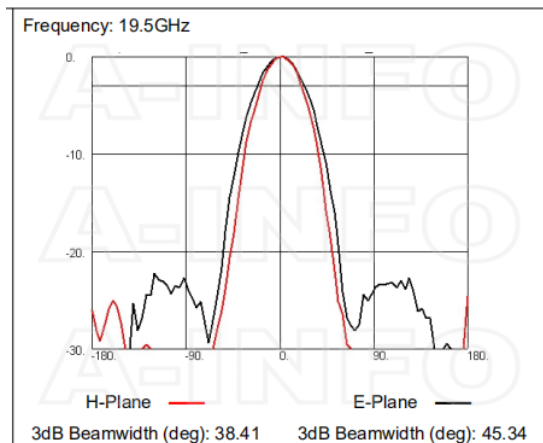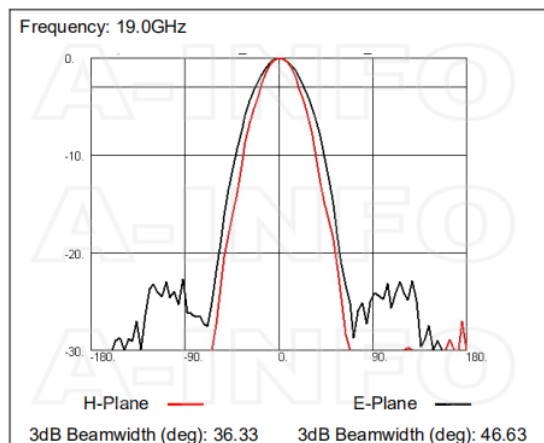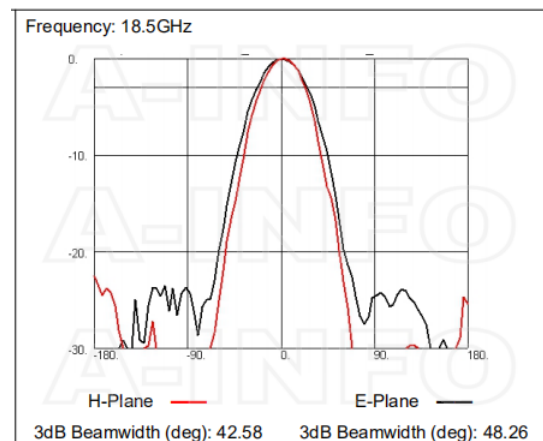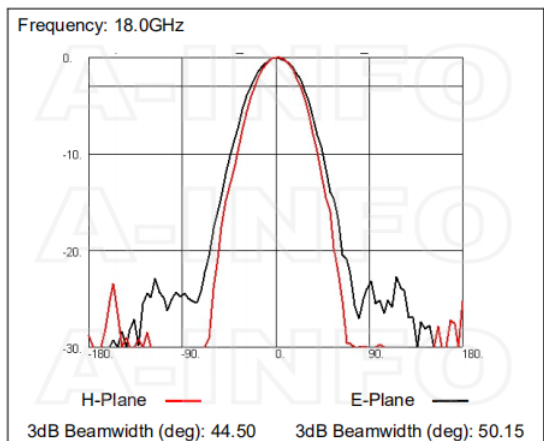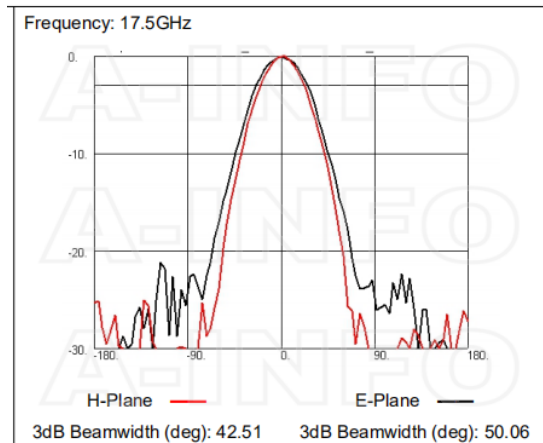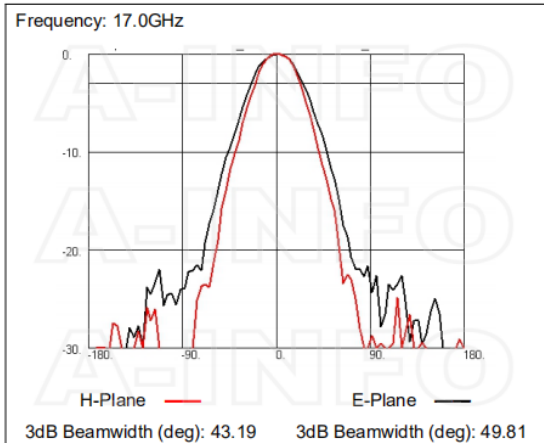

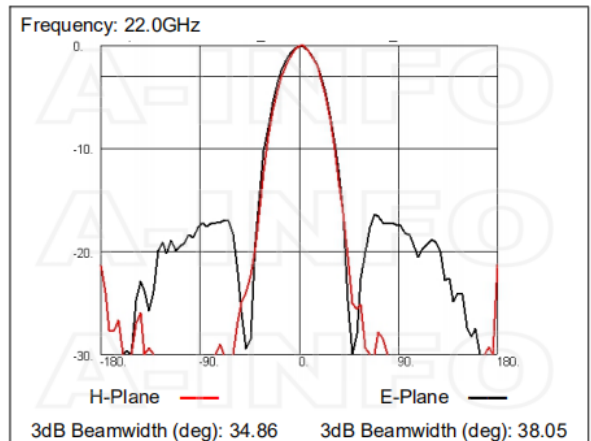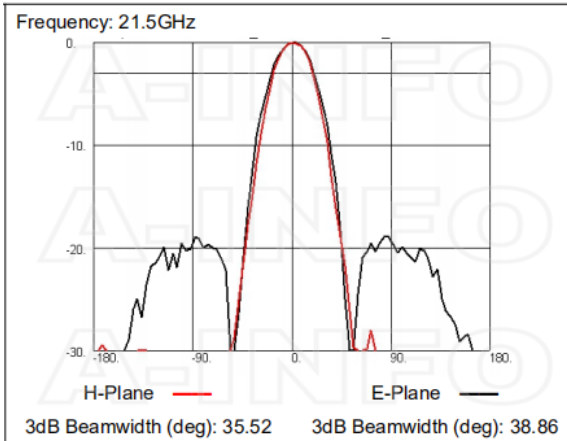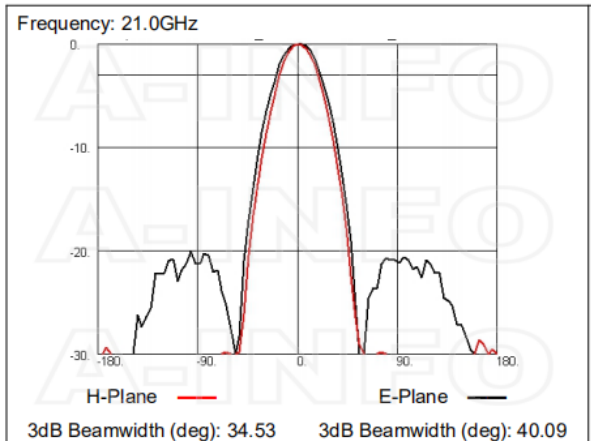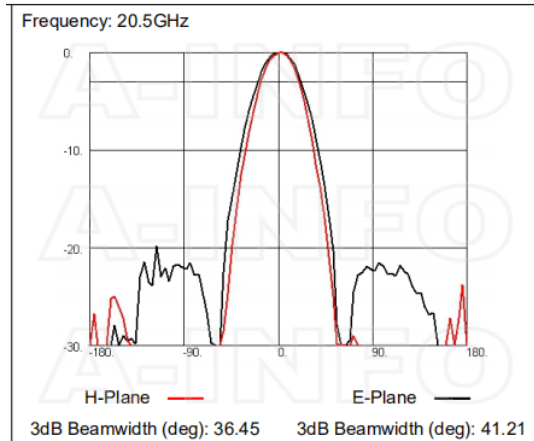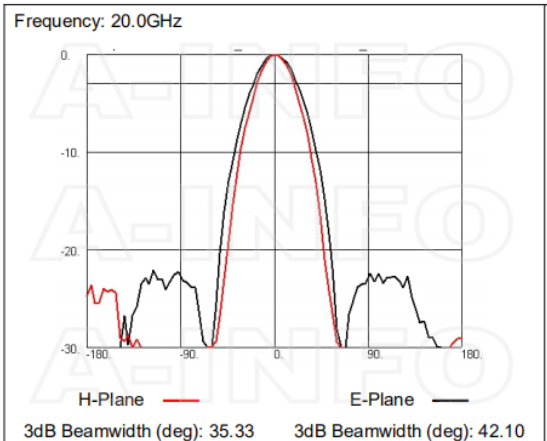

Related Products



LB-51-10-C-MB Round Type Mounting Bracket



LB-51-10-C-MBL L type mounting bracket



LB-51-10-C-MA Stinger Type Mounting Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



M4x12 Hex_Pack WR51-WR112 Assembly Pack



SM-SM-A050-500 Flexible Cable Assembly 500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-500 Flexible Cable Assembly 500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male




SM-SM-A080-20000 Flexible Cable Assembly 20000mm DC- 26.5GHz SMA Male to SMA Male

Similar Products



LB-51-10-A Standard Gain Horn Antenna 15-22GHz 10dB Gain Rectangular Waveguide Interface




LB-51-10-ASPO Standard Gain Horn Antenna 15-22GHz 10dB Gain Rectangular Waveguide Interface



LB-51-10-C-SF Standard Gain Horn Antenna 15-22GHz 10dB Gain SMA Female



LB-51-10-C-SFSPO Standard Gain Horn Antenna 15-22GHz 10dB Gain SMA Female



LB-51-10-C-ESFSPO Standard Gain Horn Antenna 15-22GHz 10dB Gain Endlaunch SMA Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-51-10-c-esf-standard-gain-horn-antenna-15-22-ghz-10db-gain-endlaunch-sma-female Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---