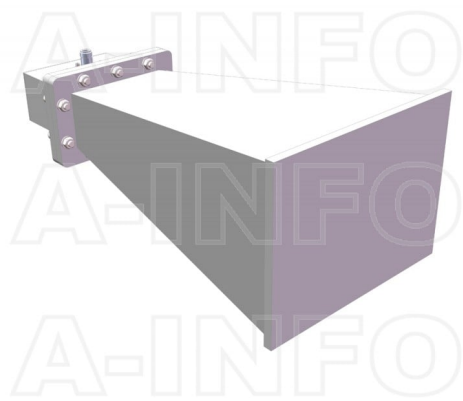


**LB-510-10-C-NFSPO Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain N Type Female**

Standard Gain Horn Antenna Operating From 1.45GHz to 2.2GHz With a Nominal 10dB Gain With N Type Female Connector

## Product Information

|     |                   |
|-----|-------------------|
| SKU | LB-510-10-C-NFSPO |
|-----|-------------------|

## Description

Standard Gain Horn Antenna LB-510-10-C-NFSPO, operating from 1.45 to 2.2GHz with a nominal 10dB gain and low VSWR 1.25:1 with N Type Female connector output. The model LB-510-10-C-NFSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 300W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

## Technical Specification


| Electrical Specification           |             | Interface                |                                         |
|------------------------------------|-------------|--------------------------|-----------------------------------------|
| Frequency, Min (GHz)               | 1.45        | Output Type              | Coaxial                                 |
| Frequency, Max (GHz)               | 2.2         | Connector                | N Type                                  |
| Waveguide Type                     | Rectangular | Connector Gender         | Female                                  |
| Waveguide Size EIA WR              | WR510       | Mechanical Specification |                                         |
| Gain, Typ (dBi)                    | 10          | Figure                   | C Type                                  |
| Polarization                       | Linear      | Body Material            | Al                                      |
| 3dB Beamwidth, E-Plane, Typ (Deg.) | 45          | Finish                   | Chemical Conversion Coating, Gray Paint |
| 3dB Beamwidth, H-Plane, Typ (Deg.) | 43          | Size, W (mm)             | 260                                     |
| Cross Pol. Isolation, Typ (dB)     | 35          | Size, H (mm)             | 195                                     |
| VSWR, Typ                          | 1.25:1      | Size, L (mm)             | 541                                     |
| Impedance, (Ohm)                   | 50          | Weight, (kg)             | 3.1                                     |
| Power Handling, CW, (W)            | 300         |                          |                                         |
| Power Handling, Peak, (W)          | 3000        |                          |                                         |

## Additional Information


|             |                                          |              |                                                                                                                                 |
|-------------|------------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------|
| Application | Outdoor, Waterproof and Dustproof, Fixed | Solution for | Gain Reference<br>Antenna Measurement<br>Reflector Feed<br>Far-field Measurement<br>System Intergration<br>Material Measurement |
|-------------|------------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------|

## Outline Drawing


N-Female Output with Radome (Option, P/N: LB-510-10-C-NFSPO, Outdoor Application)

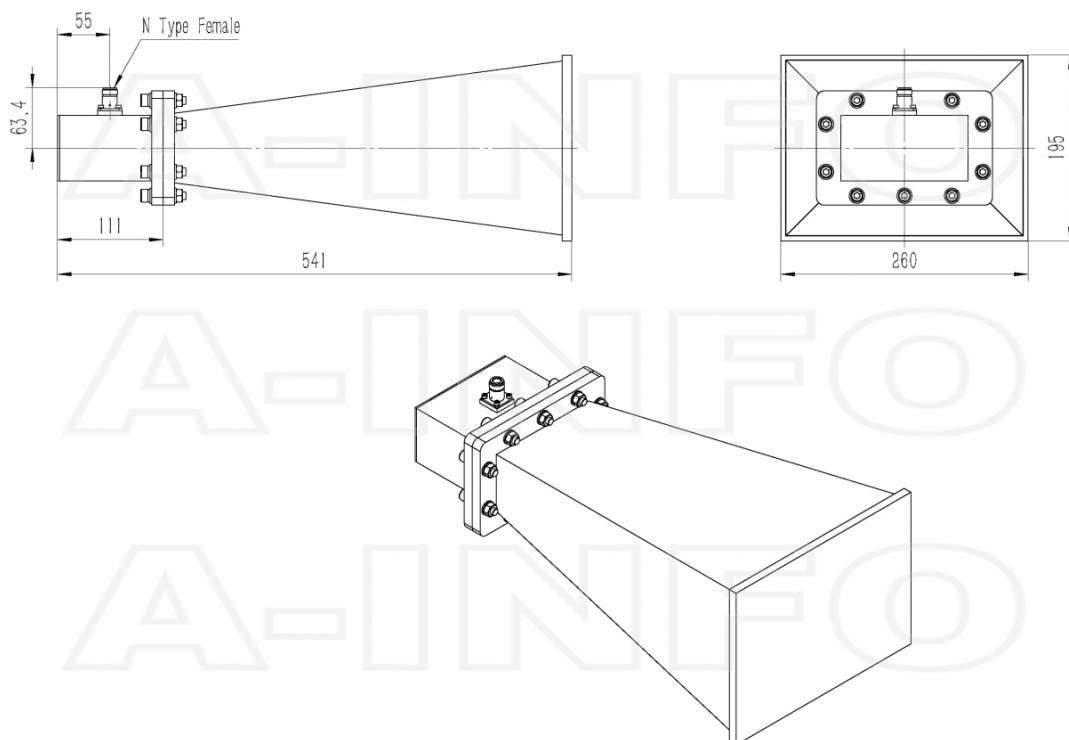

N-Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-510-10-C-MB & LB-510-10-C-NFSPO, Outdoor Application)

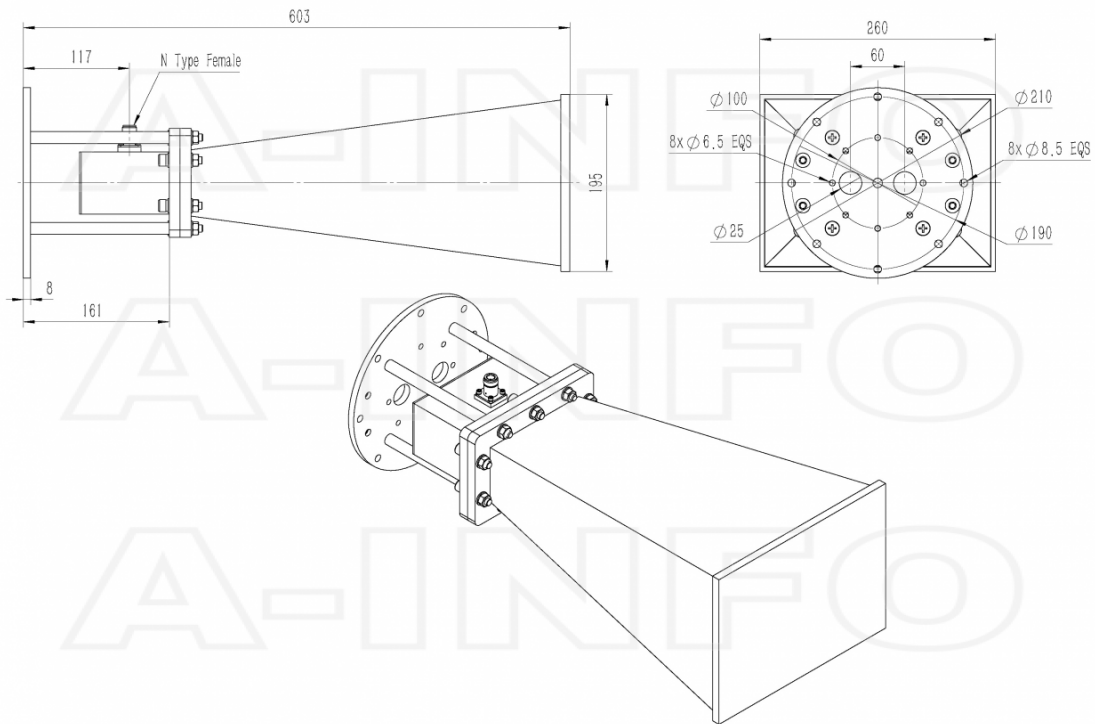


N-Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-510-10-C-L & LB-510-10-C-NFSPO, Outdoor Application)

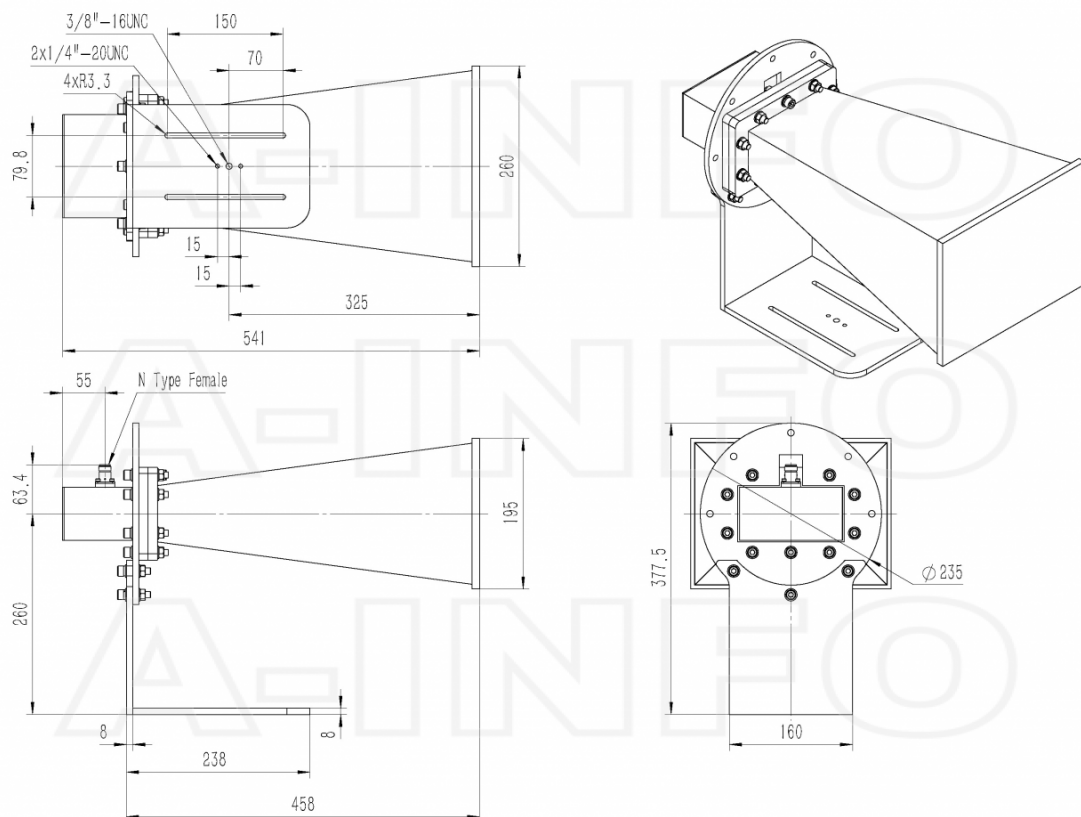


## Typical Test Results

### Gain

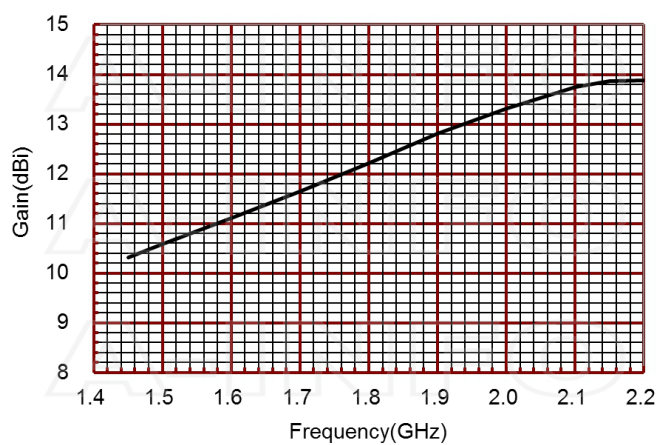


### Antenna Factor

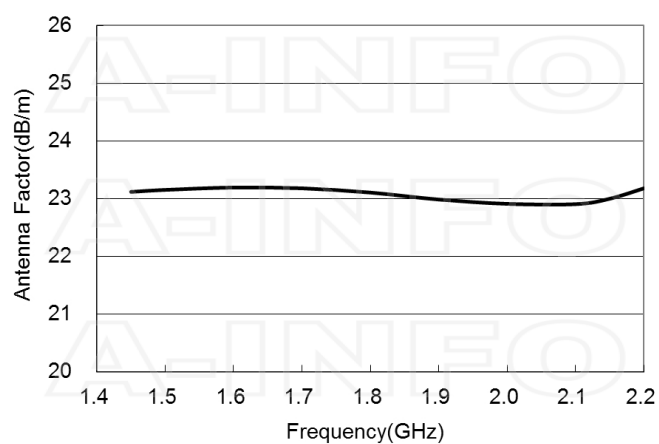


### Antenna Factor (Table)

| Frequency(GHz) | Gain(dBi) | Antenna Factor(dB/m) |
|----------------|-----------|----------------------|
| 1.45           | 10.32     | 23.12                |
| 1.50           | 10.58     | 23.15                |
| 1.60           | 11.10     | 23.19                |
| 1.70           | 11.64     | 23.18                |
| 1.80           | 12.21     | 23.11                |
| 1.90           | 12.80     | 22.99                |
| 2.00           | 13.32     | 22.91                |
| 2.10           | 13.75     | 22.90                |
| 2.15           | 13.86     | 23.00                |
| 2.20           | 13.88     | 23.18                |



## Cross Polarization Isolation


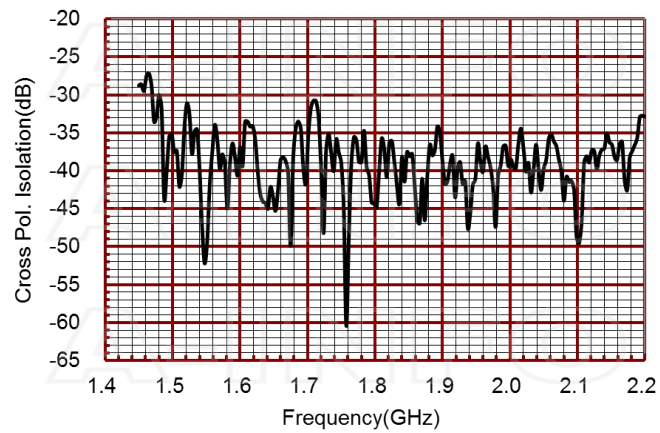


## VSWR

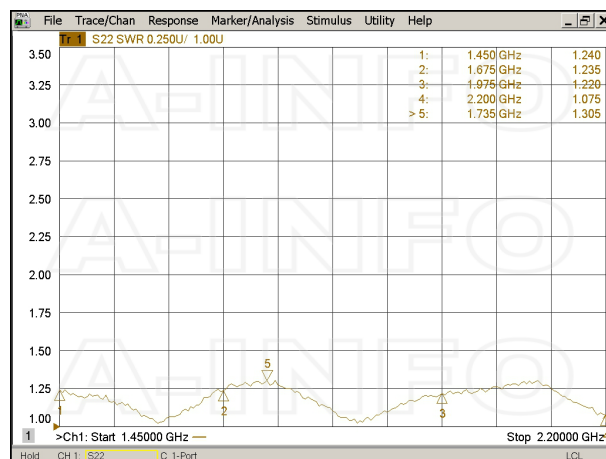

## Pattern

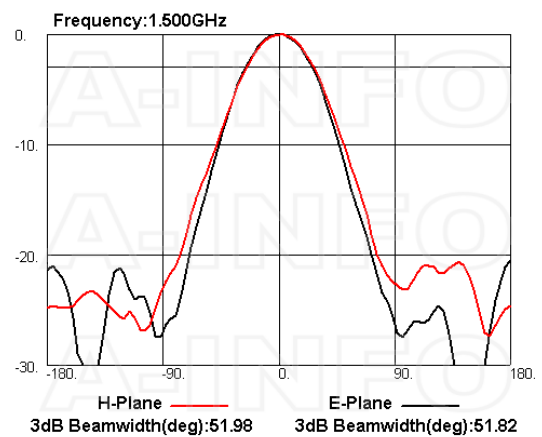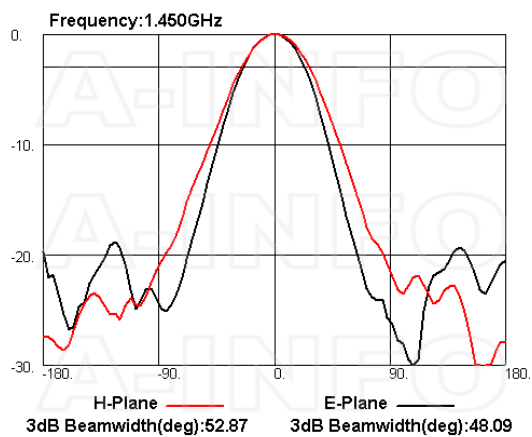

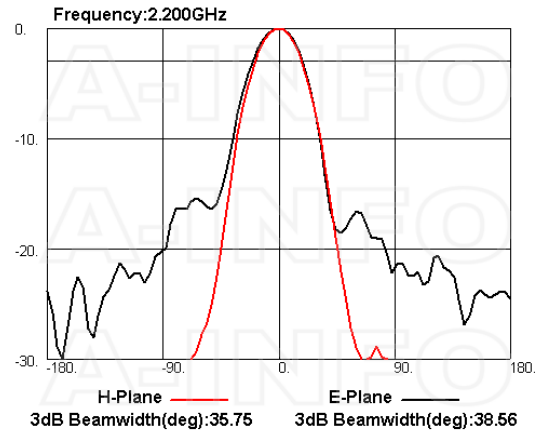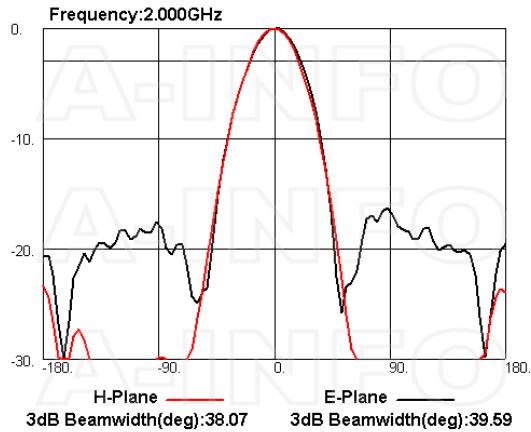

### Related Products



LB-510-10-C-MB Round Type Mounting Bracket



LB-510-10-C-L L type mounting bracket



Carrying Case\_LB-510-10-C Al Alloy Carrying Case



M8x40 Hex\_Pack WR510-WR650 Flange Assembly Pack



NM-NM-A050-1000 Flexible Cable Assembly 1000mm DC-18GHz N Male to N Male



NM-NM-A050-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A050-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A050-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A050-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A050-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male



NM-NM-A050-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male



NM-NM-A100-500 Flexible Cable Assembly 500mm DC-18GHz N Male to N Male



NM-NM-A100-1000 Flexible Cable Assembly 1000mm DC-18GHz N Male to N Male



NM-NM-A100-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A100-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A100-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A100-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male




NM-NM-A100-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male




NM-NM-A100-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male

### Similar Products



LB-510-10-A Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain Rectangular Waveguide Interface



LB-510-10-ASPO Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain Rectangular Waveguide Interface



LB-510-10-C-NF Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain N Type Female




LB-510-10-C-SF Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain SMA Female



LB-510-10-C-SFSPO Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain SMA Female



LB-510-10-C-7/16F Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain 7/16(DIN) Female



LB-510-10-C-7/16FSPO Standard Gain Horn Antenna 1.45-2.2GHz 10dB Gain 7/16(DIN) Female

About this Datasheet

|                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                |                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>● Product Information</li></ul> <p>Product Link:<br/><a href="https://www.ainfoinc.com/lb-510-10-c-nfspo-standard-gain-horn-antenna-1-45-2-2-ghz-10db-gain-n-type-female">https://www.ainfoinc.com/lb-510-10-c-nfspo-standard-gain-horn-antenna-1-45-2-2-ghz-10db-gain-n-type-female</a><br/>Data subject to change without notice.<br/>© A-INFO INC. 2023. All Rights Reserved</p> | <ul style="list-style-type: none"><li>● Contact Us</li></ul> <p>Address:dd<br/>60 Tesla, Irvine, CA 92618,<br/>USA</p> <p>Website:<br/><a href="http://www.ainfoinc.com">www.ainfoinc.com</a></p> <p>Email:<br/><a href="mailto:sales@ainfoinc.com">sales@ainfoinc.com</a></p> | <ul style="list-style-type: none"><li>● Phone &amp; Fax</li></ul> <p>Phone:<br/>+1-949-639-9688<br/>+1-949-639-9608</p> <p>Fax:<br/>+1-949-639-9670</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|