



LB-62-10-C-NFSPO Standard Gain Horn Antenna 12.4-18GHz 10dB Gain
N Type Female

Standard Gain Horn Antenna Operating From 12.4GHz to 18GHz With a
Nominal 10dB Gain With N Type Female Connector

Product Information

SKU	LB-62-10-C-NFSPO
-----	------------------

Description

Standard Gain Horn Antenna LB-62-10-C-NFSPO, operating from 12.4 to 18GHz with a nominal 10dB gain and low VSWR 1.5:1 with N Type Female connector output. The model LB-62-10-C-NFSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 150W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	12.4	Output Type	Coaxial
Frequency, Max (GHz)	18	Connector	N Type
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR62	Mechanical Specification	
Gain, Typ (dBi)	10	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Typ (Deg.)	49	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	44	Size, W (mm)	37
Cross Pol. Isolation, Typ (dB)	35	Size, H (mm)	44.6
VSWR, Typ	1.5:1	Size, L (mm)	89
Impedance, (Ohm)	50	Weight, (kg)	0.1
Power Handling, CW, (W)	150		
Power Handling, Peak, (W)	3000		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


N Type Female Output with Radome (Option, P/N: LB-62-10-C-NFSPO, Outdoor Application)

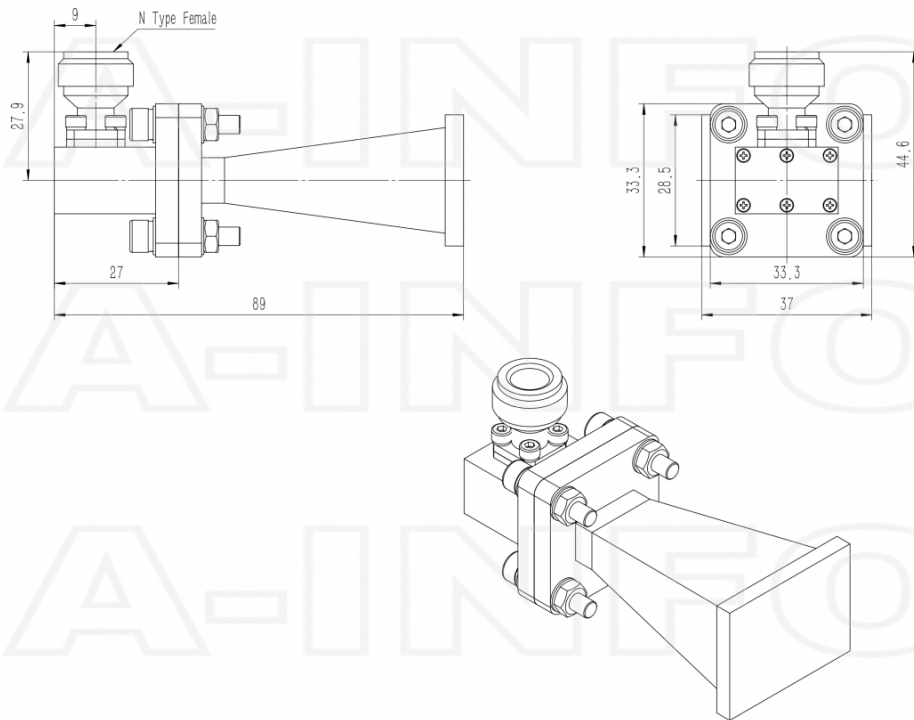

N Type Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-62-10-C-MB & LB-62-10-C-NFSPO, Outdoor Application)

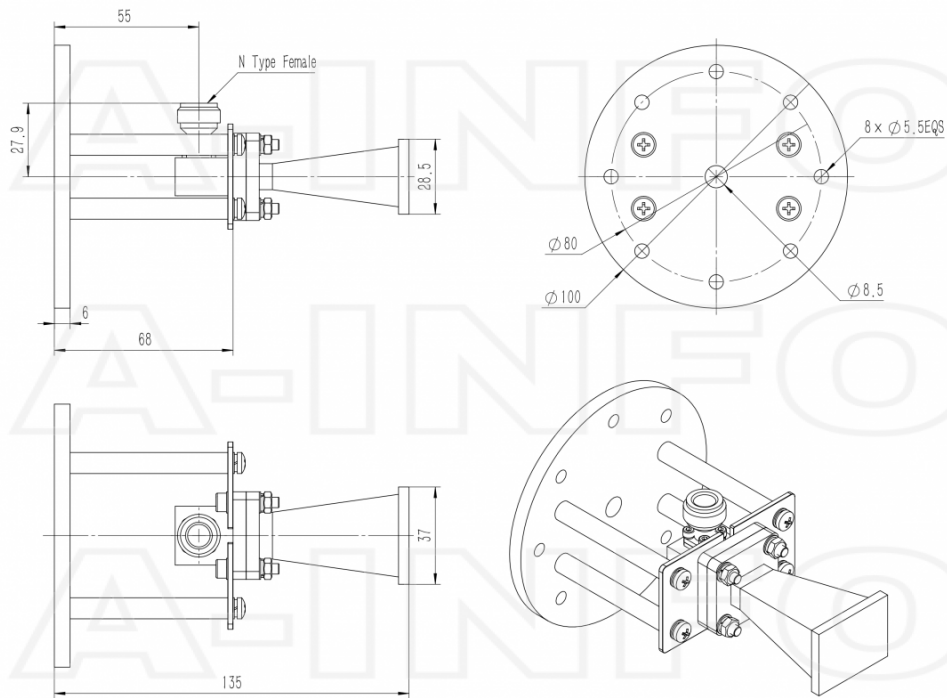


N Type Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-62-10-C-MBL & LB-62-10-C-NFSPO, Outdoor Application)

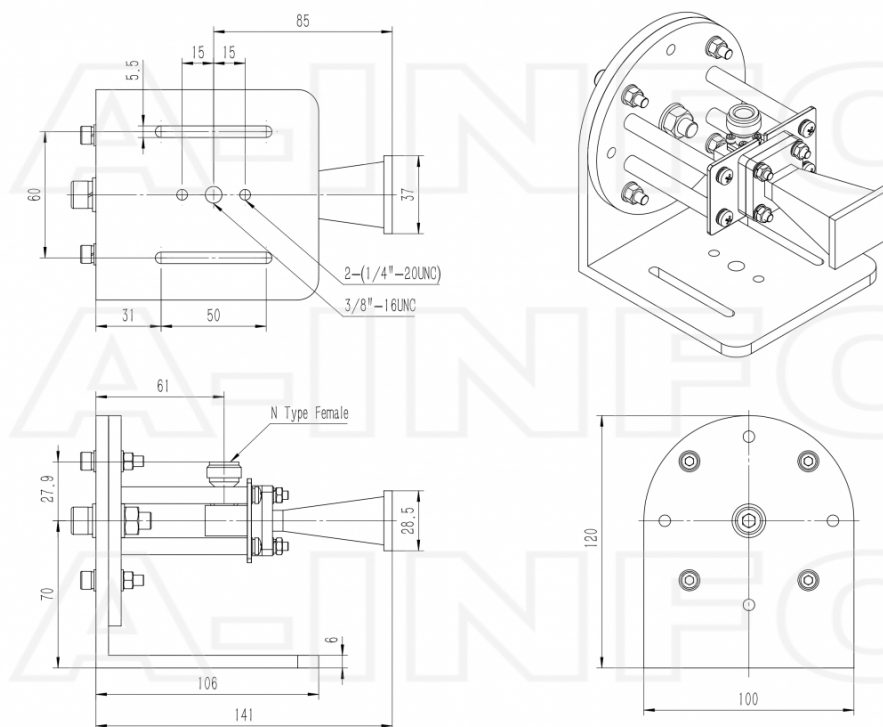


Typical Test Results

Gain

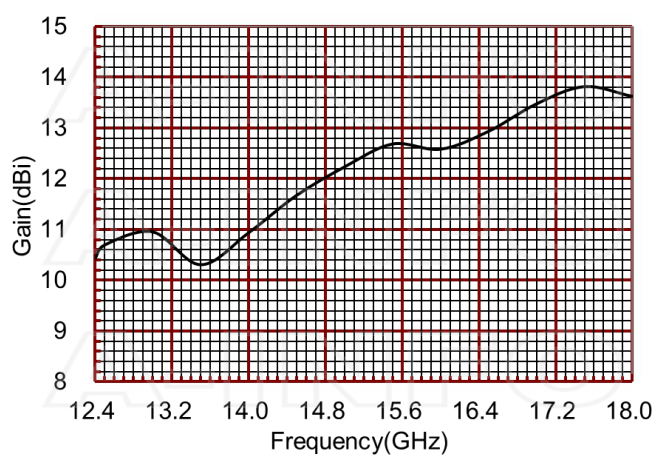


Antenna Factor

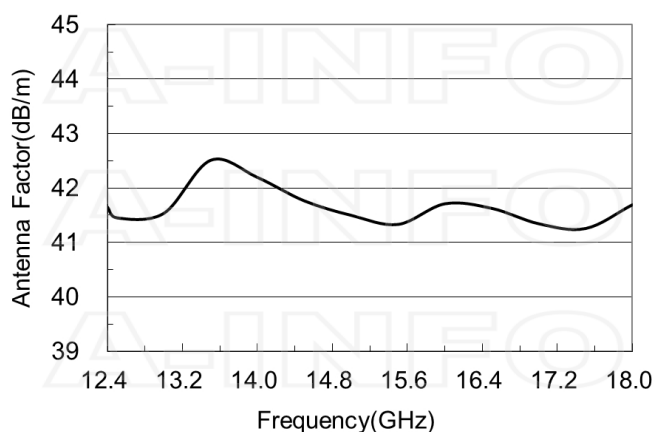


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
12.4	10.43	41.65
12.5	10.70	41.45
13.0	10.95	41.54
13.5	10.31	42.51
14.0	10.94	42.19
14.5	11.67	41.76
15.0	12.23	41.50
15.5	12.68	41.33
16.0	12.58	41.71
16.5	12.93	41.63
17.0	13.48	41.34
17.5	13.81	41.26
18.0	13.62	41.69



Cross Polarization Isolation






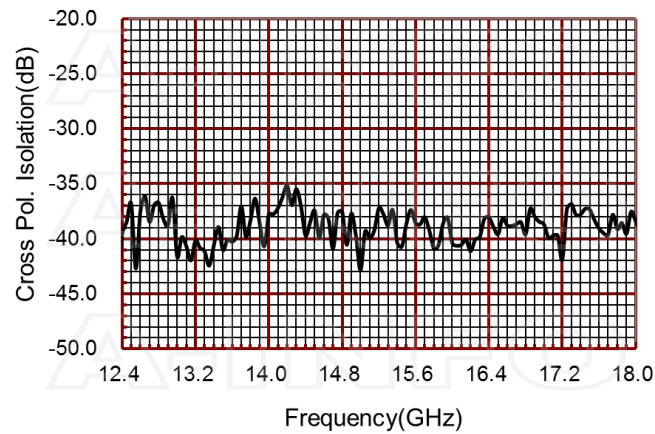






VSWR

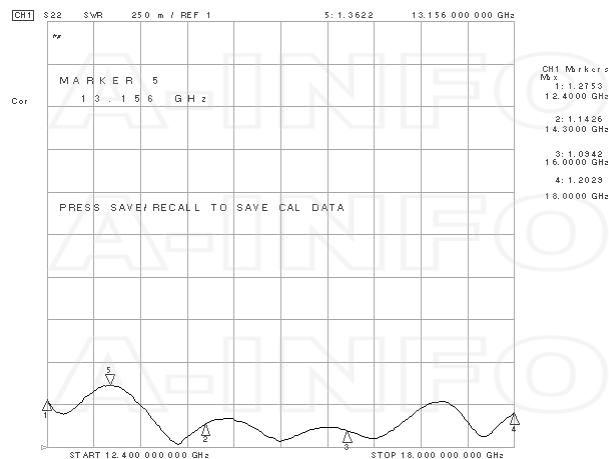

Pattern

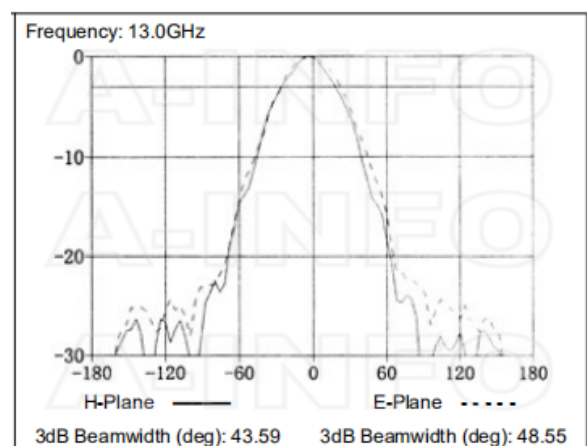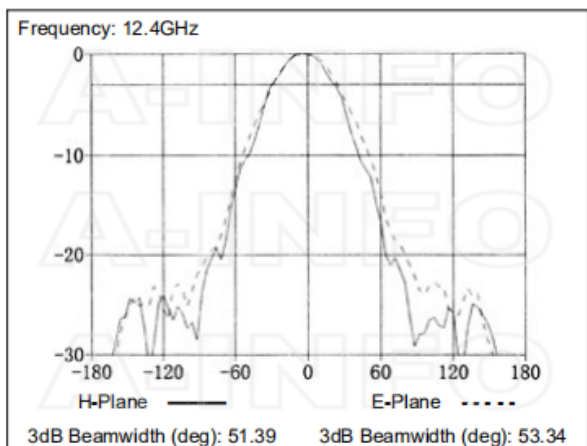

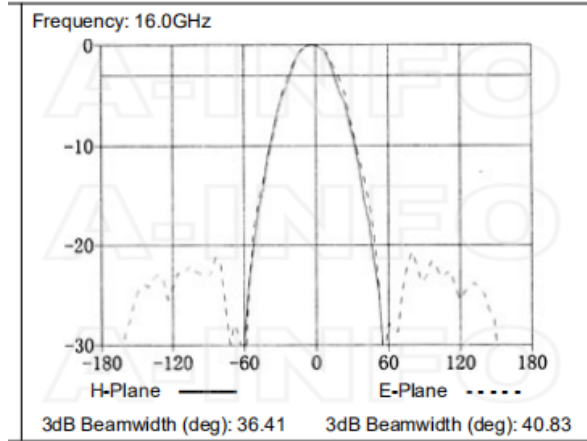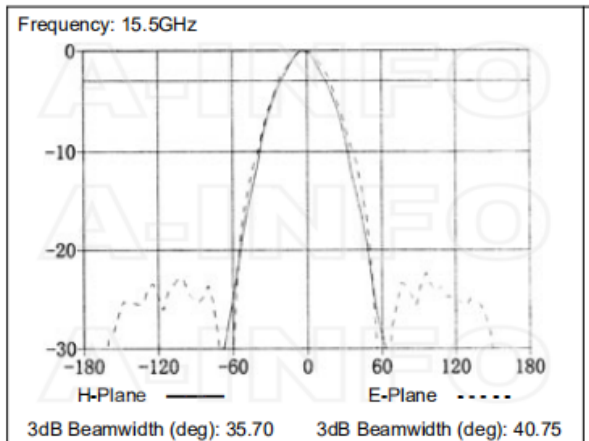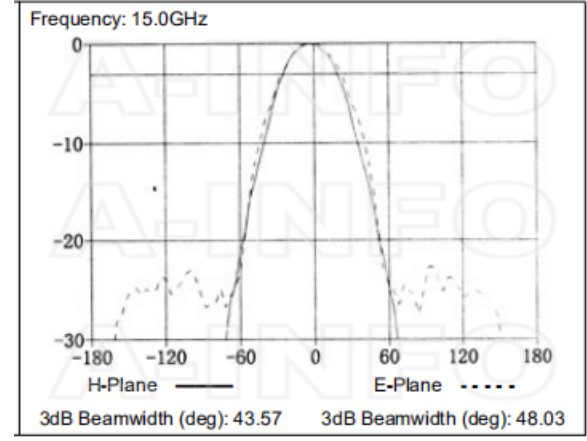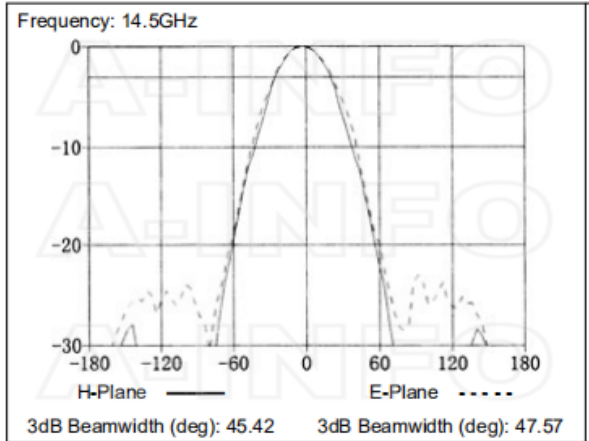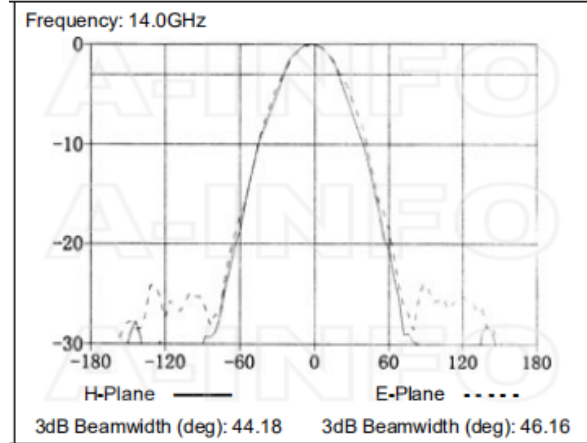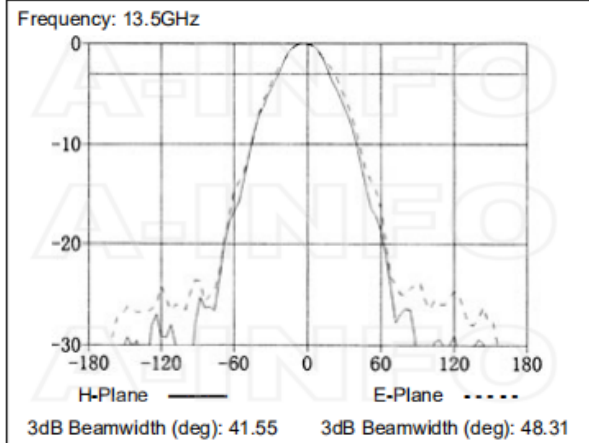

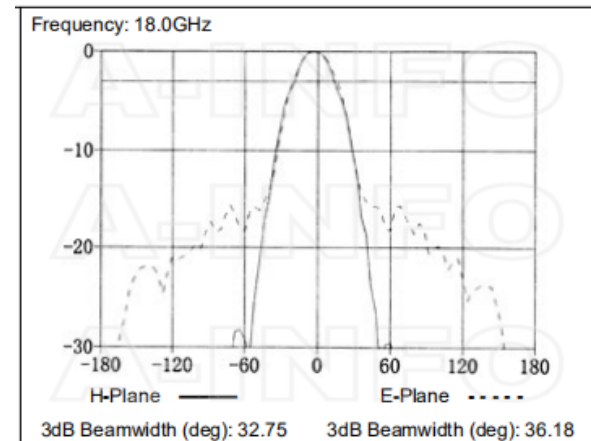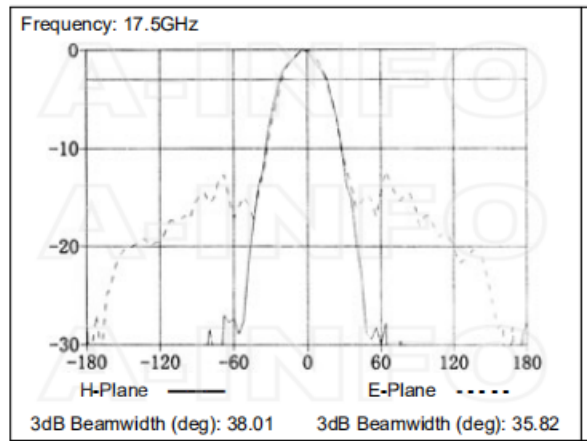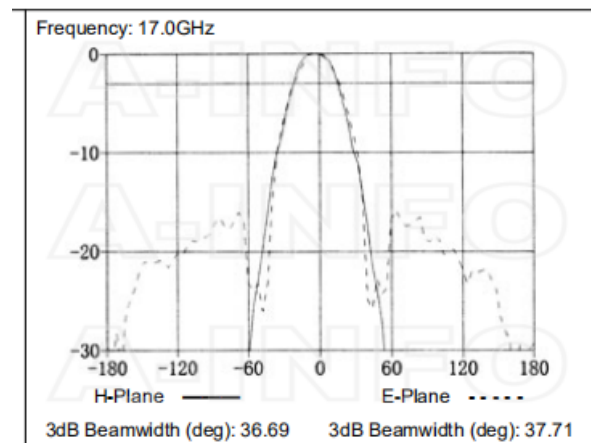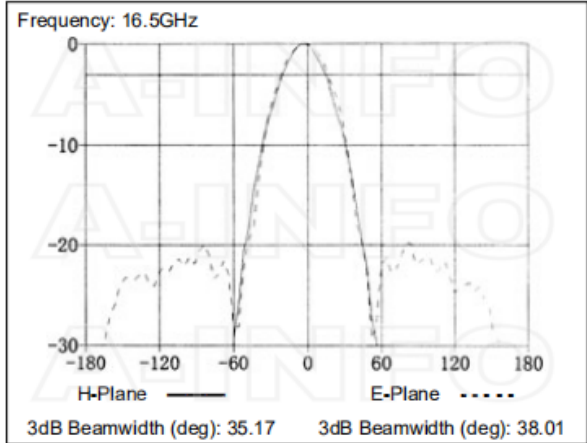

Related Products



LB-62-10-C-MB Round Type Mounting Bracket



LB-62-10-C-MBL L type mounting bracket



LB-62-10-C-MA Stinger Type Mounting Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod
Metalfree



M4x12 Hex_Pack WR51-WR112
Assembly Pack



M4x20 Hex_Pack WR112- WR51
Flange Assembly Pack



M4x30 Hex_Pack Log Periodic, DS
Assembly Pack



NM-NM-A050-500 Flexible Cable
Assembly 500mm DC- 18GHz N
Male to N Male



NM-NM-A050-1000 Flexible
Cable Assembly 1000mm DC-
18GHz N Male to N Male



NM-NM-A050-1500 Flexible
Cable Assembly 1500mm DC-
18GHz N Male to N Male



NM-NM-A050-2000 Flexible
Cable Assembly 2000mm DC-
18GHz N Male to N Male



NM-NM-A050-3000 Flexible
Cable Assembly 3000mm DC-
18GHz N Male to N Male



NM-NM-A050-5000 Flexible
Cable Assembly 5000mm DC-
18GHz N Male to N Male



NM-NM-A050-10000 Flexible
Cable Assembly 10000mm DC-
18GHz N Male to N Male



NM-NM-A050-20000 Flexible
Cable Assembly 20000mm DC-
18GHz N Male to N Male



NM-NM-A100-500 Flexible Cable
Assembly 500mm DC- 18GHz N
Male to N Male



NM-NM-A100-1000 Flexible
Cable Assembly 1000mm DC-
18GHz N Male to N Male



NM-NM-A100-1500 Flexible
Cable Assembly 1500mm DC-
18GHz N Male to N Male



NM-NM-A100-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A100-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A100-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A100-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male



NM-NM-A100-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male


Similar Products



LB-62-10-A Standard Gain Horn Antenna 12.4-18GHz 10dB Gain Rectangular Waveguide Interface



LB-62-10-ASPO Standard Gain Horn Antenna 12.4-18GHz 10dB Gain Rectangular Waveguide Interface



LB-62-10-C-SF Standard Gain Horn Antenna 12.4-18GHz 10dB Gain SMA Female




LB-62-10-C-SFSPO Standard Gain Horn Antenna 12.4-18GHz 10dB Gain SMA Female



LB-62-10-C-NF Standard Gain Horn Antenna 12.4-18GHz 10dB Gain N Type Female



LB-62-10-C-TF Standard Gain Horn Antenna 12.4-18GHz 10dB Gain TNC Female



LB-62-10-C-TFSP Standard Gain Horn Antenna 12.4-18GHz 10dB Gain TNC Female



LB-62-10-C-7 Standard Gain Horn Antenna 12.4-18GHz 10dB Gain 7mm



LB-62-10-C-7SPO Standard Gain
Horn Antenna 12.4-18GHz 10dB
Gain 7mm



LB-62-10-C-3.5F Standard Gain
Horn Antenna 12.4-18GHz 10dB
Gain 3.5mm Female



LB-62-10-C-3.5FSP0 Standard
Gain Horn Antenna 12.4-18GHz
10dB Gain 3.5mm Female

About this Datasheet

● Product Information Product Link: https://www.ainfoinc.com/lb-62-10-c-nfsp0-standard-gain-horn-antenna-12-4-18-ghz-10db-gain-n-type-female Data subject to change without notice. © A-INFO INC. 2023. All Rights Reserved	● Contact Us Address:dd 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com	● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---