



LB-90-15-C-SFSP0 Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain SMA Female

Standard Gain Horn Antenna Operating From 8.2GHz to 12.4GHz With a Nominal 15dB Gain With SMA Female Connector

Product Information

SKU	LB-90-15-C-SFSP0
-----	------------------

Description

Standard Gain Horn Antenna LB-90-15-C-SFSP0, operating from 8.2 to 12.4GHz with a nominal 15dB gain and low VSWR 1.25:1 with SMA Female connector output. The model LB-90-15-C-SFSP0 has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 50W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This standard gain horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	8.2	Output Type	Coaxial
Frequency, Max (GHz)	12.4	Connector	SMA
Waveguide Type	Rectangular	Connector Gender	Female
Waveguide Size EIA WR	WR90	Mechanical Specification	
Gain, Typ (dBi)	15	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Typ (Deg.)	28	Finish	Chemical Conversion Coating, Gray Paint
3dB Beamwidth, H-Plane, Typ (Deg.)	26	Size, W (mm)	90
Cross Pol. Isolation, Typ (dB)	35	Size, H (mm)	66
VSWR, Typ	1.25:1	Size, L (mm)	145.5
Impedance, (Ohm)	50	Weight, (kg)	0.16
Power Handling, CW, (W)	50		
Power Handling, Peak, (W)	3000		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Reflector Feed Far-field Measurement System Intergration Material Measurement
-------------	--	--------------	---

Outline Drawing


SMA Female Output with Radome (Option, P/N: LB-90-15-C-SFSP0, Outdoor Application)

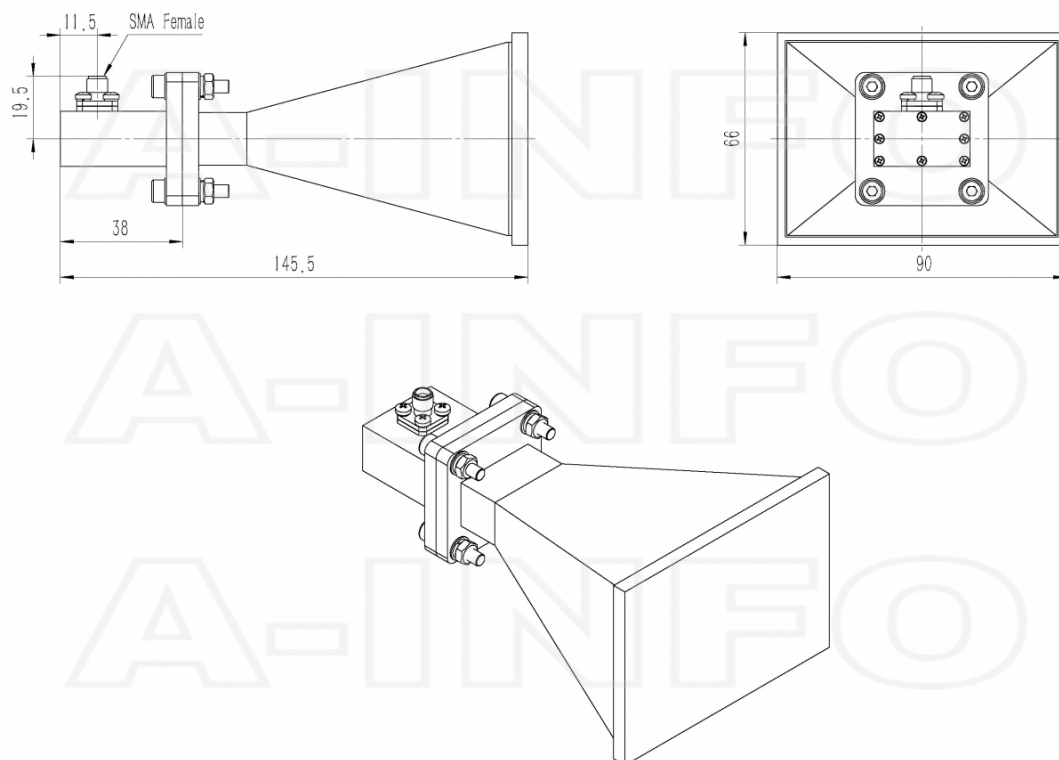


SMA Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-90-10-C-MB & LB-90-15-C-SFSP0, Outdoor Application)

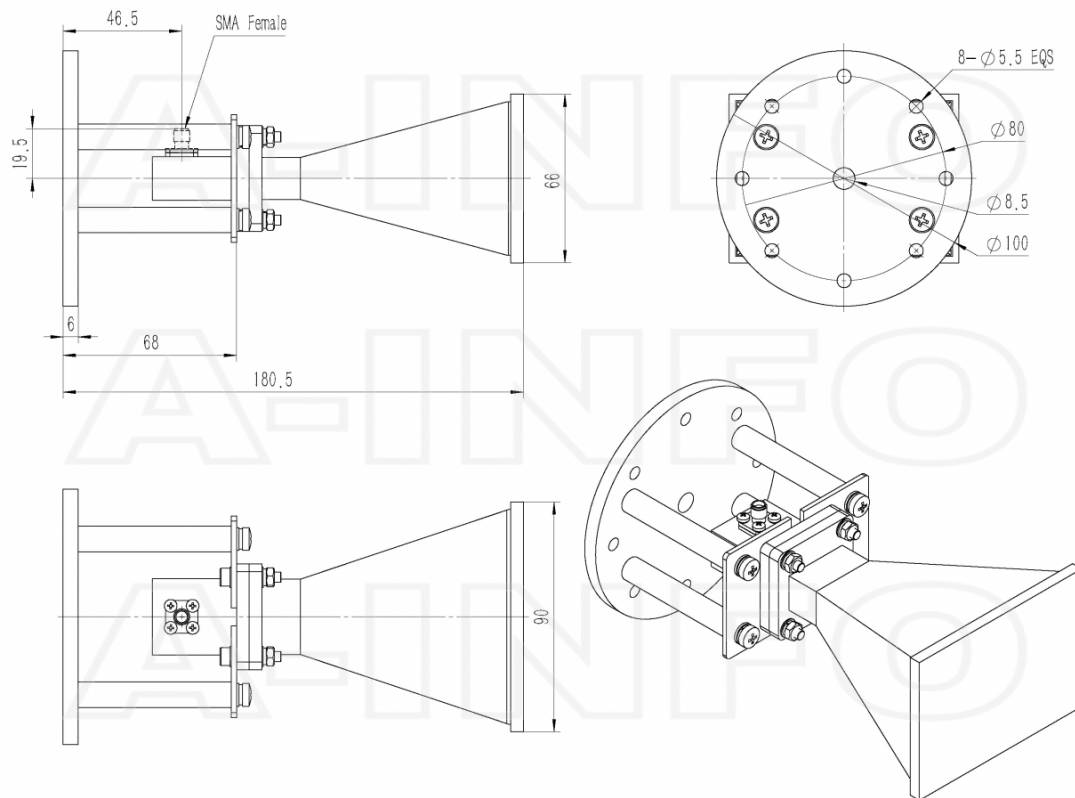

SMA Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-90-10-C-MBL & LB-90-15-C-SFSP0, Outdoor Application)

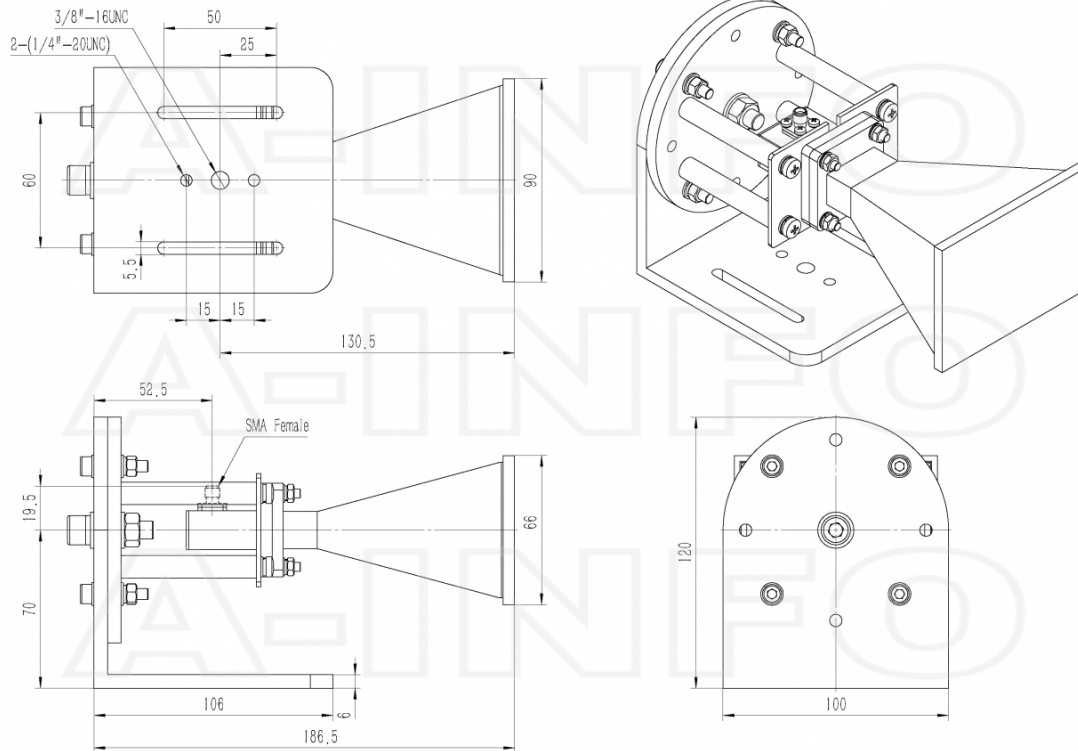


SMA Female Output with Stinger Type Mounting Bracket & Radome (Option, P/N: LB-90-10-C-MA & LB-90-15-C-SFSP0, Outdoor Application)

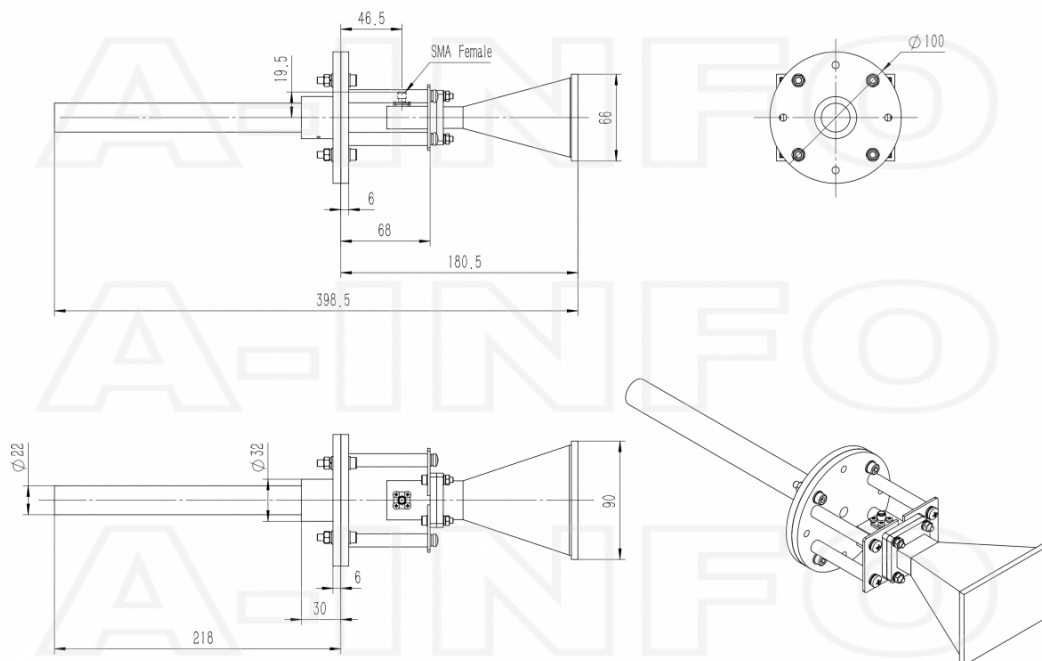


Typical Test Results

Gain

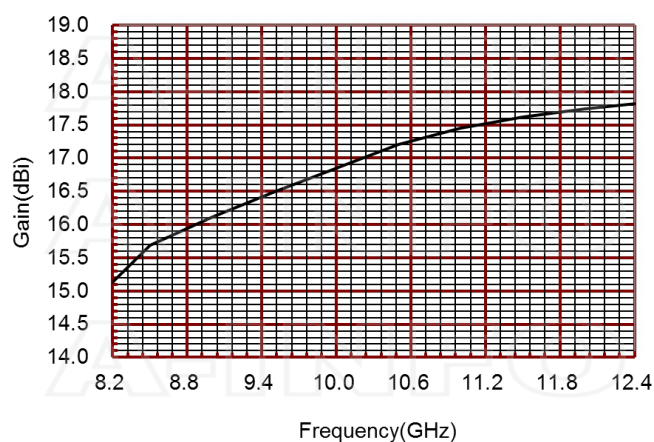


Antenna Factor

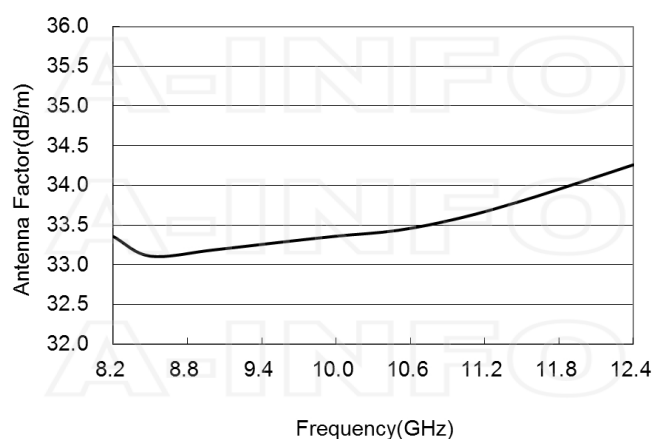


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
8.2	15.13	33.36
8.5	15.69	33.11
9.0	16.11	33.18
9.5	16.49	33.27
10.0	16.85	33.36
10.5	17.20	33.43
11.0	17.45	33.59
11.5	17.62	33.80
12.0	17.74	34.05
12.4	17.82	34.26



Cross Polarization Isolation






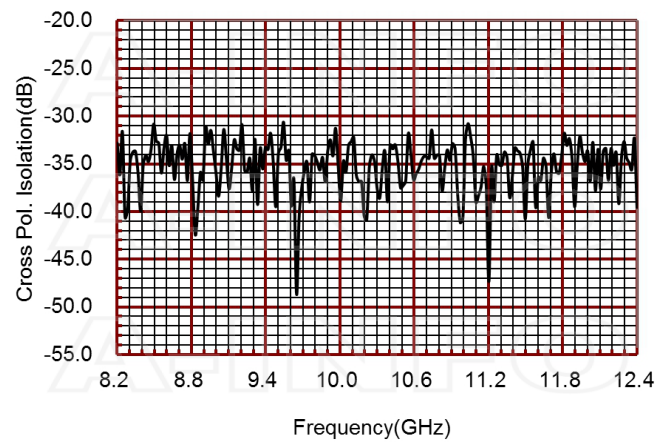




VSWR

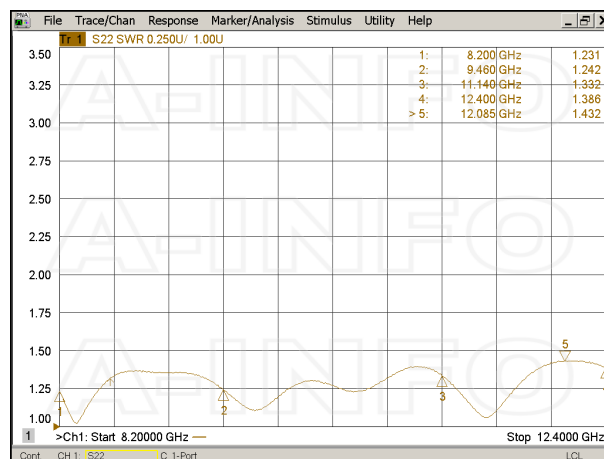

Pattern

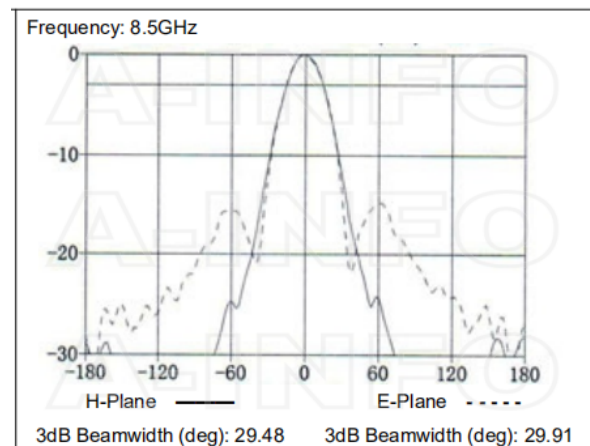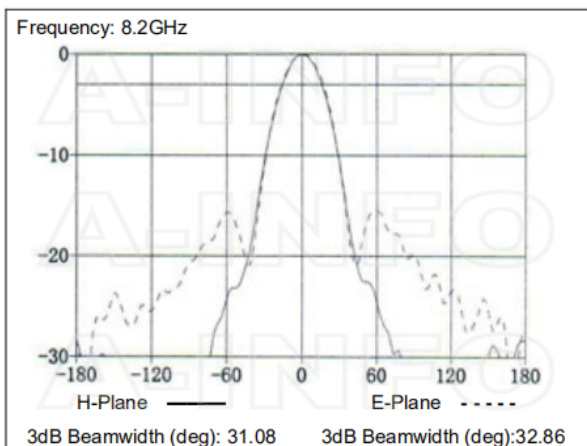

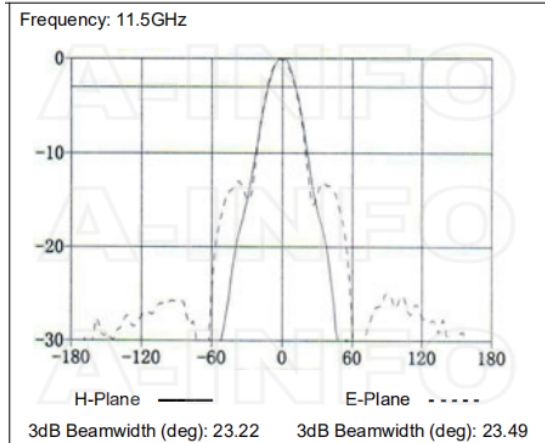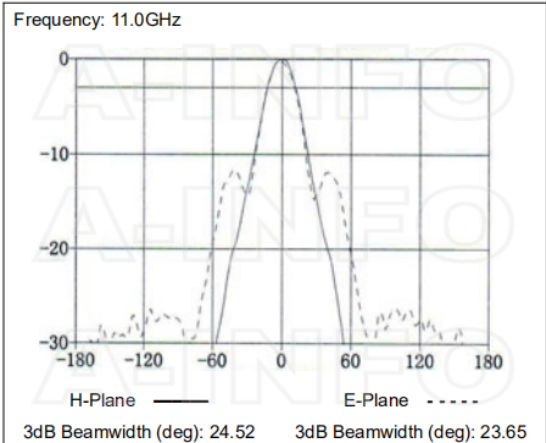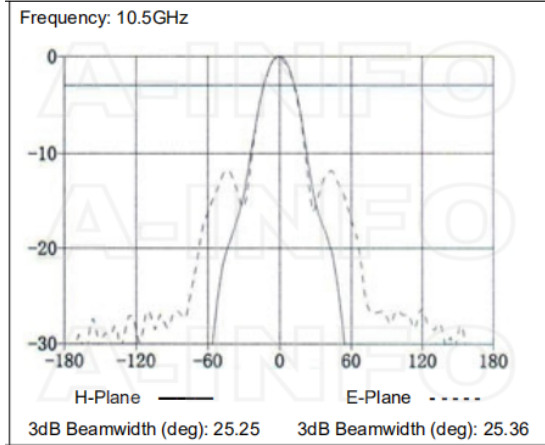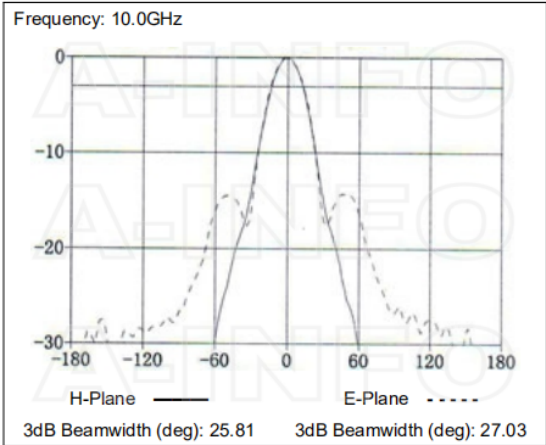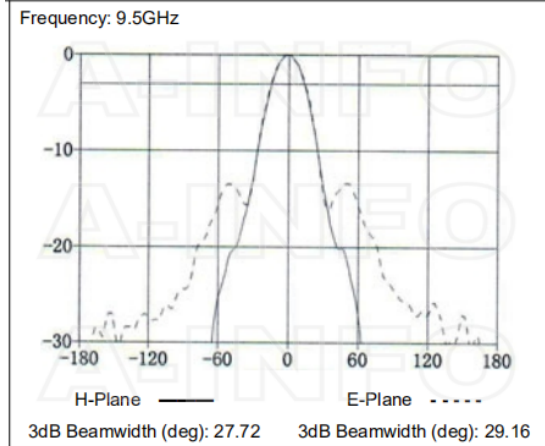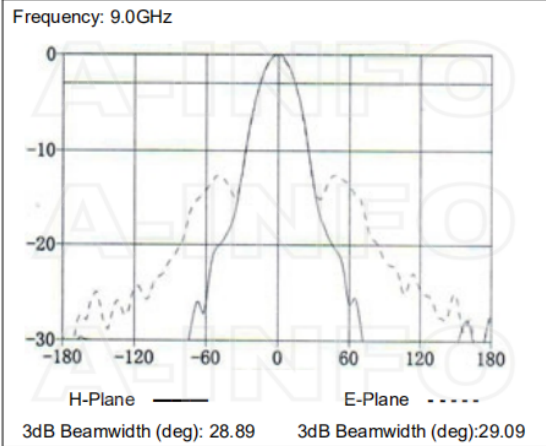

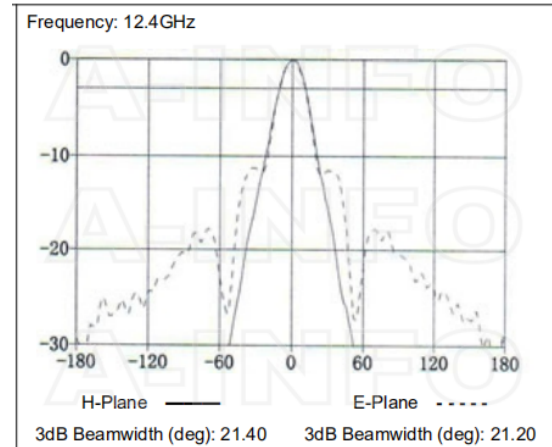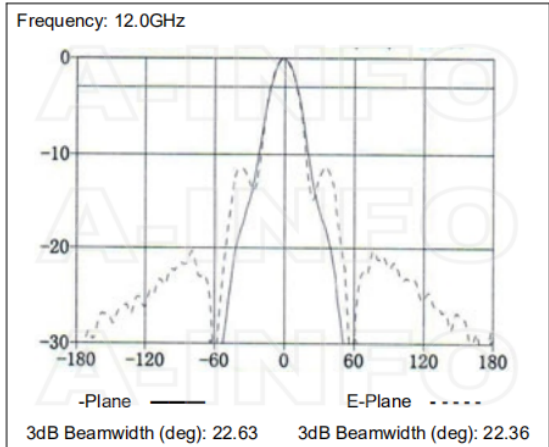

Related Products



LB-90-10-C-MB Round Type Mounting Bracket



LB-90-10-C-MBL L type mounting bracket



LB-90-10-C-MA Stinger Type Mounting Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



Carrying Case_LB-90-15-C Al Alloy Carrying Case



M4x12 Hex_Pack WR51-WR112 Assembly Pack



M4x20 Hex_Pack WR112- WR51 Flange Assembly Pack



M4x30 Hex_Pack Log Periodic, DS Assembly Pack



SM-SM-A050-500 Flexible Cable Assembly 500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1500 Flexible Cable
Assembly 1500mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A050-2000 Flexible Cable
Assembly 2000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A050-3000 Flexible Cable
Assembly 3000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A050-5000 Flexible Cable
Assembly 5000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A050-10000 Flexible
Cable Assembly 10000mm DC-
26.5GHz SMA Male to SMA Male



SM-SM-A080-200 Flexible Cable
Assembly 200mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-300 Flexible Cable
Assembly 300mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-500 Flexible Cable
Assembly 500mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-1000 Flexible Cable
Assembly 1000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-1500 Flexible Cable
Assembly 1500mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-2000 Flexible Cable
Assembly 2000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-3000 Flexible Cable
Assembly 3000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-5000 Flexible Cable
Assembly 5000mm DC- 26.5GHz
SMA Male to SMA Male



SM-SM-A080-10000 Flexible
Cable Assembly 10000mm DC-
26.5GHz SMA Male to SMA Male



SM-SM-A080-20000 Flexible
Cable Assembly 20000mm DC-
26.5GHz SMA Male to SMA Male



SM-SM-A100-100 Flexible Cable
Assembly 100mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-200 Flexible Cable
Assembly 200mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-300 Flexible Cable
Assembly 300mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-500 Flexible Cable
Assembly 500mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-1000 Flexible Cable
Assembly 1000mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-1500 Flexible Cable
Assembly 1500mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-2000 Flexible Cable
Assembly 2000mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-3000 Flexible Cable
Assembly 3000mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-5000 Flexible Cable
Assembly 5000mm DC- 18GHz
SMA Male to SMA Male



SM-SM-A100-10000 Flexible
Cable Assembly 10000mm DC-
18GHz SMA Male to SMA Male

Similar Products



LB-90-15-A Standard Gain Horn
Antenna 8.2-12.4GHz 15dB Gain
Rectangular Waveguide Interface




LB-90-15-ASPO Standard Gain
Horn Antenna 8.2-12.4GHz 15dB
Gain Rectangular Waveguide
Interface



LB-90-15-C-SF Standard Gain
Horn Antenna 8.2-12.4GHz 15dB
Gain SMA Female




LB-90-15-C-NF Standard Gain
Horn Antenna 8.2-12.4GHz 15dB
Gain N Type Female



LB-90-15-C-NFSPO Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain N Type Female




LB-90-15-C-TF Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain TNC Female



LB-90-15-C-TFSP0 Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain TNC Female



LB-90-15-C-7 Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain 7mm



LB-90-15-C-7SPO Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain 7mm



LB-90-15-C-3.5F Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain 3.5mm Female



LB-90-15-C-3.5FSPO Standard Gain Horn Antenna 8.2-12.4GHz 15dB Gain 3.5mm Female

About this Datasheet

- Product Information

Product Link:
<https://www.ainfoinc.com/lb-90-15-c-sfsp0-standard-gain-horn-antenna-8-2-12-4-ghz-15db-gain-sma-female>
Data subject to change without notice.
© A-INFO INC. 2023. All Rights Reserved

- Contact Us

Address:dd
60 Tesla, Irvine, CA 92618,
USA

Website:
www.ainfoinc.com

Email:
sales@ainfoinc.com

- Phone & Fax

Phone:
+1-949-639-9688
+1-949-639-9608

Fax:
+1-949-639-9670