

6-18GHz/50Watts/Rack Mount

Model Number: KB60180S47A

The KB60180S47A is a rack-mountable unit incorporating a universal voltage power supply and a built in forced air-cooling system. This amplifier subsystem utilizes GaN power device that provides excellent power density, high efficiency, low distortion and wide dynamic range. Due to robust engineering and employment of advanced broadband RF matching networks, combining techniques and qualified components, the amplifier achieves consistent performance with field proven reliability.

FEATURES:

- Instantaneous ultra-broadband
- Suitable for CW, AM, and FM modulation type
- Compact and robust design
- Standard front panel manual gain adjust
- Unconditional stability and ruggedness

ELECTRICAL SPECIFICATIONS @ 220VAC, 25°C, 50Ω System

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Frequency	BW	6		18	GHz
Output Power CW	PSAT		50		Watt
Power Gain @ PSAT	Gp		47		dB
Input Power for Rated PSAT	PIN		0		dBm
Power Gain Flatness	ΔGp		±2.5		dB
Input Return Loss	S11			-10	dB
Harmonics @ POUT =30W	H		-20		dBc
Spurious Signals@ POUT =30W	Spur		-60		dBc
Input/Output Impedance	Impedance		50		dBc
Operating Voltage (single-phase)	VAC	180	220	240	Volt
Power Consumption @30W CW	PD		800		Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Limits
Dimensions (W x H x D) – Bench Top / Rack Mount	483 x 88.1 x 425 mm [19x3.5x17.5 inch] (2U)	Max
Weight	20kg [44 lbs]	Typ
RF Connectors Input /Output	Type-SMA, Female / Type-SMA, Female	
Cooling	Built-in internal forced air cooling system	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Ambient Temperature	-20		50	°C	
Storage Temperature	-25		85	°C	
Relative Humidity (non-condensing)			95	%	

PROTECTIONS

Input RF drive level without	+5 dBm	Max
VSWR protection@30W	@ 3:1- PA output power will degrade to a safe operation level, and system will still work. @ >3:1 protection will make system shutdown.	
Thermal Overload	Power will Gracefully Degrade, when Ambient Temp >40°C	

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice

6-18GHz/50Watts/Rack Mount

Model Number: KB60180S47A


AVAILABLE OPTIONS (Selected options refer to the factory)

Description		LCD Screen
Status Monitor	LCD controller	Digital Display, including FWD/REV Power indication (dBm or Watt scale), Standby mode, Fault indication
RS-232	Serial management of device	D-Sub 9-position Male

I/O CONNECTOR-Monitor Display or RS-232

Pin#	Description	Specifications	Option FGA	LED
1	FWD	Forward detected power		
2	REV	Reverse detected power		
3	RS232(-) (Optional)	Transmit data-R x D		
4	RS232(+) (Optional)	Transmit data-T x D		
5	GND	Transmit data-GND		
6	Reserved	Reserved		
7	Reserved	Reserved		
8	Reserved	Reserved		
9	Reserved	Reserved		

OUTLINE DRAWING (All dimensions in mm[inch])

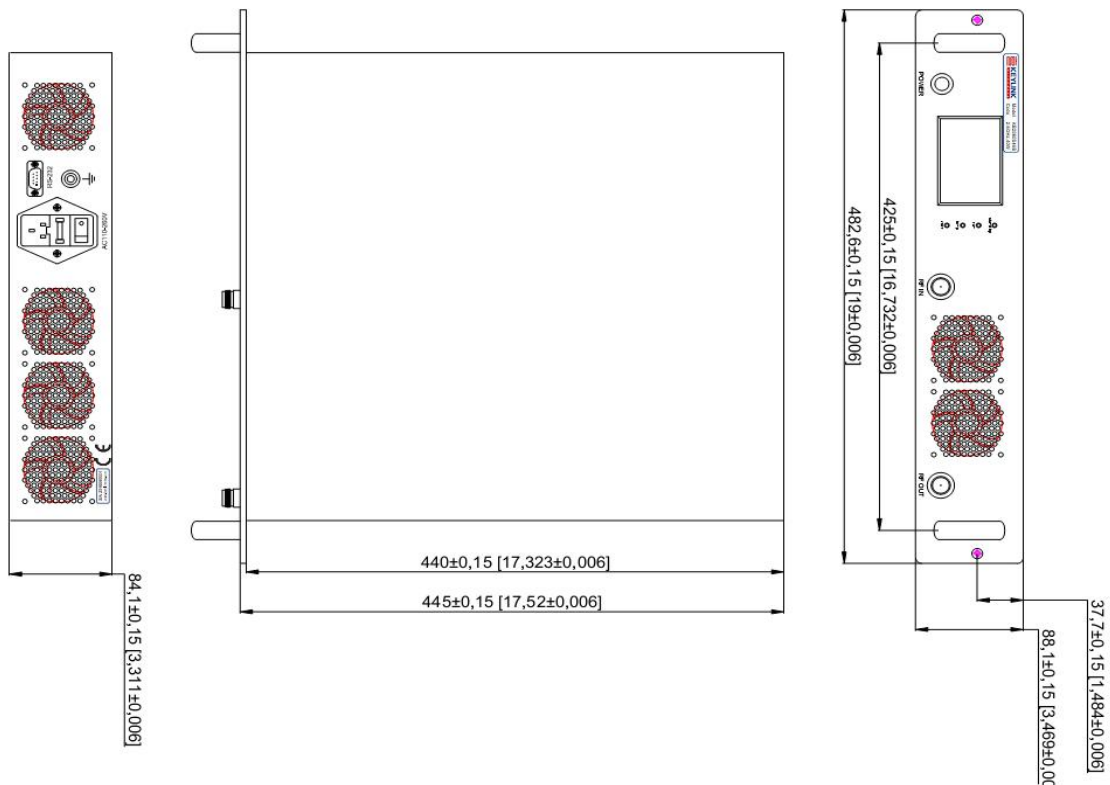

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708

>> Fax: +86(28)87883266

>> sales@keylinkmw.com


>> www.keylinkmw.com

Specifications subject to change without notice

6-18GHz/50Watts/Rack Mount

Model Number: KB60180S47A

TYPICAL PERFORMANCE PLOTS (For reference only)

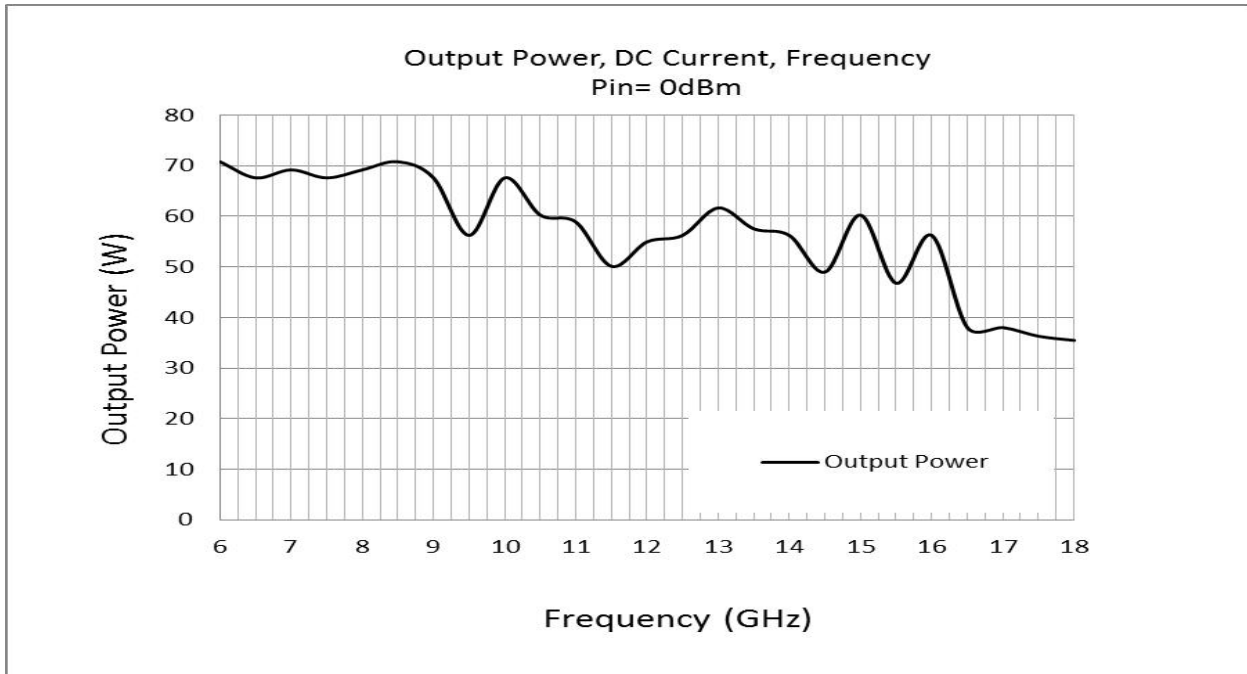

Note: This product will be developed upon contract/order. All the above specs are for reference only. Actual product may be different. Please check with Key Link sales team if you have any question.

Focus on Your Application

Chengdu KeyLink Microwave Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech(West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761*8708 >> Fax: +86(28)87883266

>> sales@keylinkmw.com >> www.keylinkmw.com

Specifications subject to change without notice