

# QBF-14000-18000-75

## 14~18GHz, 75dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	14~18GHz
Center Insertion Loss:	0.7dB max.
VSWR:	1.8 max.
Stopband Attenuation:	75dB@12GHz min. 75dB@20GHz min.
Impedance:	50Ω

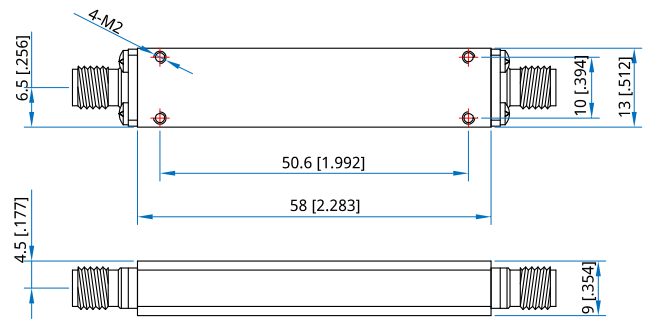
**Mechanical**

Size <sup>*1</sup> :	58*13*9mm 2.283*0.512*0.354in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-14000-18000-75**

Customization is available upon request.