

QPD16-300-4000-30-S

16-Way, 0.3~4GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.3~4GHz
Insertion Loss:	4dB max.
Input VSWR:	1.45 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size*1:	236*176*12mm 9.291*6.929*0.472in
Weight:	3.5Kg
Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

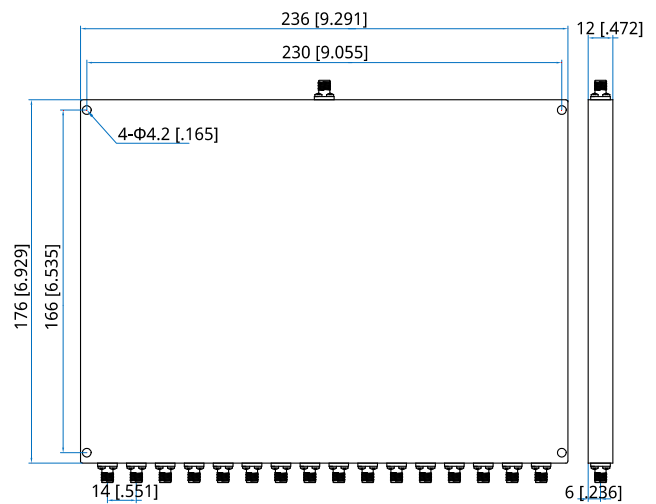

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD16-300-4000-30-S

Customization is available upon request.