

QRF-2570-2620-55

2.57~2.62GHz, 55dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.555GHz 2.635~4GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	2 max.
Stopband:	2.57~2.62GHz
Stopband Attenuation:	55dB min.
Average Power:	50W max.
Impedance:	50Ω

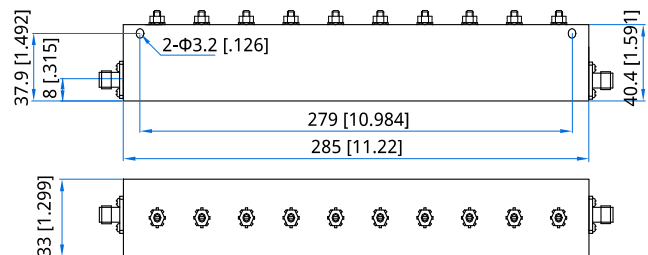
Mechanical

Size ^{*1} :	285*40.4*33mm 11.22*1.591*1.299in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+55°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-2570-2620-55

Customization is available upon request.