

QRF-2575-2615-60

2575~2615MHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2570MHz 2620-6000MHz
Passband Insertion Loss:	6dB max.
VSWR:	2 max.
Stopband:	2575~2615MHz
Stopband Attenuation:	60dB min.
Average Power:	40W typ.

Mechanical


Size*1:	468*36*43mm 18.425*1.417*1.693in
RF Connectors:	SMA Female, SMA Male
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

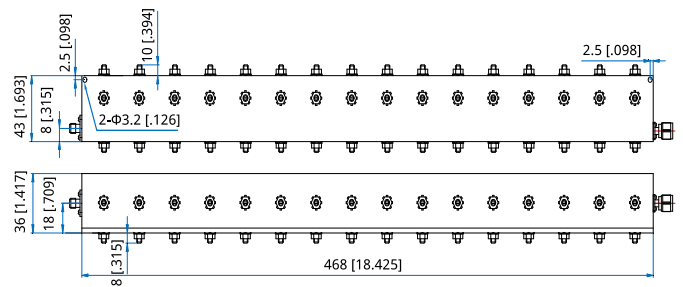

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-2575-2615-60

Customization is available upon request.