



Prosilica GC

660



- Compact
- High frame rate
- Rugged housing
- Video-type auto iris

Description

Fast CCD camera with EXview sensor - high sensitivity

Prosilica GC660 is a fast, VGA resolution, high performance machine vision camera with Gigabit Ethernet interface (GigE Vision). GC660 incorporates a Sony EXview HAD CCD sensor that has particularly high quantum efficiency and excellent NIR response for excellent image quality and sensitivity. Options

• IR cut filter, CS-Mount


Specifications

| Prosilica GC | 660 |
|-----------------------------------|-----------------------------|
| Interface | IEEE 802.3 1000baseT |
| Resolution | 659 × 493 |
| Sensor | Sony ICX618 |
| Sensor type | CCD Progressive |
| Sensor size | Type 1/4 |
| Cell size | 5.6 μm |
| Lens mount | C (adjustable) / CS |
| Max frame rate at full resolution | 119 fps |
| ADC | 12 bit |
| On-board FIFO | 16 Mbyte |
| Output | |
| Bit depth | 8/12 bit |
| Mono modes | Mono8, Mono12, Mono12Packed |
| Color modes RGB | RGB8Packed, BGR8Packed |





| Prosilica GC | 660 |
|--|--|
| Raw modes | BayerRG8, BayerRG12, BayerGR12Packed |
| General purpose inputs/outputs (GPIOs) | |
| TTL I/Os | 1 input, 1 output |
| Opto-isolated I/Os | 1 input, 1 output |
| RS-232 | 1 |
| Operating conditions/dimensions | |
| Operating temperature | 0°C +50°C |
| Power requirements (DC) | 5-25 VDC* |
| Power consumption (@12 V) | 3 W |
| Mass | 105 g |
| Body dimensions (L × W × H in mm) | 59 × 46 × 33 including connectors, w/o tripod and lens |
| Regulations | CE, FCC Class A, RoHS (2011/65/EU) |

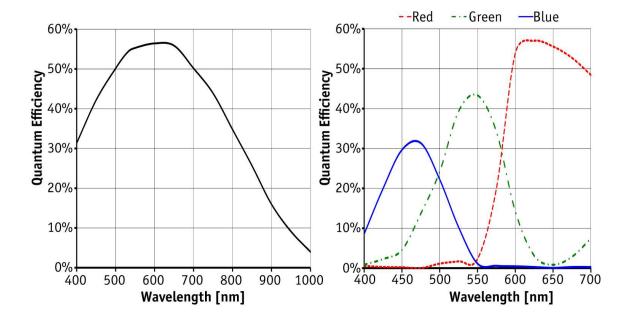

Features

Prosilica GC660 features include:

- Video-type auto iris
- ROI, DSP subregion (selectable ROI for auto features)
- Binning
- Auto gain (manual gain control: 0 to 34 dB)
- Auto exposure (manual exposure controls: 10 µs to 78.5 s)






- Auto white balance
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Global shutter (digital shutter)
- Recorder and Multiframe acquisition modes
- Event channel
- · Chunk data
- Storable user sets





Technical drawing

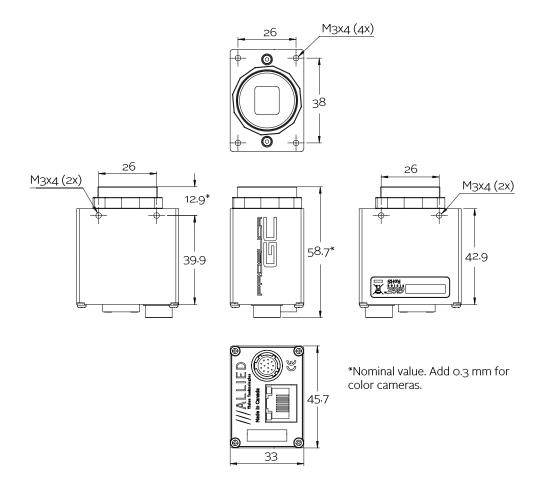





Applications

Prosilica GC660 is ideal for a wide range of applications including:

- Machine vision
- Industrial inspection
- Public security
- Traffic monitoring
- Robotics

