

# R&S® ZNH FULL TWO-PORT HANDHELD VECTOR NETWORK ANALYZER

## Specifications

3  
year  
warranty



Data Sheet  
Version 02.01

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Measurements.....	5
Measurement accuracy of the R&S®ZNH4/8/18 .....	7
Effective system data of the R&S®ZNH4/8/18 .....	8
Measurement accuracy of the R&S®ZNH26.....	9
Effective system data of the R&S®ZNH26 .....	10
Maximum rated input levels .....	10
General data.....	11
<b>Options .....</b>	<b>12</b>
R&S®ZNH-K10 DC bias option .....	12
R&S®ZNH-K29 pulse measurements with power sensor.....	12
R&S®ZNH-K45 vector voltmeter option .....	12
R&S®ZNH-K66 wave ratios and wave quantities option .....	12
<b>Ordering information .....</b>	<b>13</b>

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

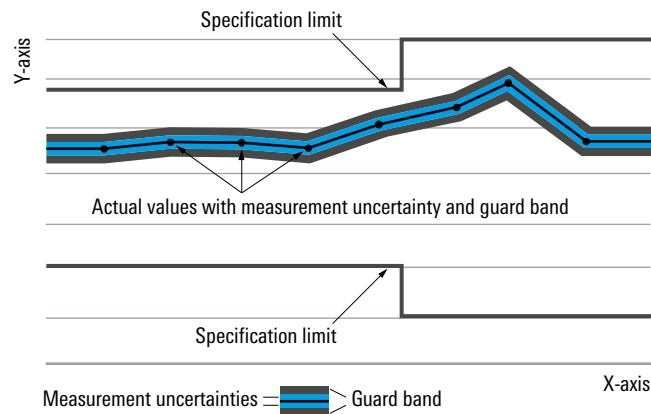

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bits per second (Gbps), million bits per second (Mbps), thousand bits per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency

Impedance		50 $\Omega$
Test port connector	R&S®ZNH4	type N, female
	R&S®ZNH8	type N, female
	R&S®ZNH18	type N, female
	R&S®ZNH26	3.5 mm, male
Number of test ports		2
Frequency range <sup>1</sup>	R&S®ZNH4	30 kHz to 4 GHz
	R&S®ZNH8	30 kHz to 8 GHz
	R&S®ZNH18	30 kHz to 18 GHz
	R&S®ZNH26	30 kHz to 26.5 GHz

<b>Reference frequency, internal</b>		
Total reference accuracy		$\pm$ (time since last adjustment $\times$ aging rate) + temperature drift + calibration accuracy
Aging per year		$\pm 1 \times 10^{-6}$
Temperature drift	0 °C to +50 °C	$\pm 1 \times 10^{-6}$
Achievable initial calibration accuracy		$\pm 5 \times 10^{-7}$

Frequency resolution		1 Hz
Number of measurement points	per trace	3 to 16001
Measurement bandwidth	1/3/10 steps	10 Hz to 100 kHz
Measurement speed	preset mode, TransNorm P1/P2, number of points: 201, IF bandwidth 100 kHz	761 $\mu$ s per point

<sup>1</sup> Specified and typical data given in this data sheet apply to the R&S®ZNH4/8/18/26; please note their respective frequency ranges.

## Measurements

<b>Individual measurements</b>		<ul style="list-style-type: none"> <li>• reflection (<math>S_{11}</math>, <math>S_{22}</math>)</li> <li>• transmission (<math>S_{21}</math>, <math>S_{12}</math>)</li> <li>• one-port cable loss</li> <li>• distance-to-fault</li> </ul>
<b>Measurement wizard</b>		
Guides the user through a sequence of individual measurements. Uses the R&S®InstrumentView PC software to configure the measurement sequence including hints displayed on the screen. R&S®InstrumentView is also used to combine the measurement results into user-configurable reports.		

<b>Test port output</b>		
Maximum port output power	$30 \text{ kHz} \leq f \leq 300 \text{ kHz}$	-10 dBm (meas.)
	$300 \text{ kHz} \leq f \leq 24 \text{ GHz}$	0 dBm (meas.)
	$24 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	-5 dBm (meas.)
Leveled port output power <sup>2</sup>	$30 \text{ kHz} \leq f \leq 300 \text{ kHz}$	-10 dBm to -25 dBm (nom.), in 1 dB steps
	$300 \text{ kHz} \leq f \leq 26.5 \text{ GHz}$	-5 dBm to -25 dBm (nom.), in 1 dB steps
Leveled port power accuracy	source power -10 dBm	
	$10 \text{ MHz} \leq f < 13 \text{ GHz}$	1.0 dB (typ.)
	$13 \text{ GHz} \leq f < 26.5 \text{ GHz}$	2.0 dB (typ.)
Leveled port power linearity	source power -10 dBm	
	$10 \text{ MHz} \leq f < 8 \text{ GHz}$	0.3 dB (meas.)
	$8 \text{ GHz} \leq f < 26.5 \text{ GHz}$	0.7 dB (meas.)

<b>Test port input</b>		
Measurement receiver linearity	referenced to -10 dBm, +10 dB	
	$10 \text{ MHz} \leq f < 26.5 \text{ GHz}$	0.05 dB (meas.)
Measurement receiver power	at -10 dBm, RF attenuation 0 dB	
Measurement accuracy	$10 \text{ MHz} \leq f < 26.5 \text{ GHz}$	0.5 dB (meas.)
Measurement receiver noise level	$10 \text{ MHz} \leq f < 8 \text{ GHz}$	-125 dBm/Hz (meas.)
	$8 \text{ GHz} \leq f < 24 \text{ GHz}$	-118 dBm/Hz (meas.)
	$24 \text{ GHz} \leq f < 26.5 \text{ GHz}$	-115 dBm/Hz (meas.)
Measurement receiver RF attenuation		0 dB to 15 dB, in 5 dB steps
Measurement receiver maximum linear input level	RF attenuation 0 dB	+10 dBm (nom.)

<b>Dynamic range <sup>3</sup></b>		
	$30 \text{ kHz} \leq f < 10 \text{ MHz}$	> 73 dB, 87 dB (typ.)
	$10 \text{ MHz} \leq f < 8 \text{ GHz}$	> 90 dB, 100 dB (typ.)
	$8 \text{ GHz} \leq f < 18 \text{ GHz}$	> 80 dB, 88 dB (typ.)
	$18 \text{ GHz} \leq f < 20 \text{ GHz}$	> 75 dB, 90 dB (typ.)
	$20 \text{ GHz} \leq f < 26 \text{ GHz}$	> 70 dB, 81 dB (typ.)
	$26 \text{ GHz} \leq f < 26.5 \text{ GHz}$	> 68 dB, 83 dB (typ.)

<sup>2</sup> For S-parameter measurements leveled port power range is recommended.

<sup>3</sup> The dynamic range is defined as the difference between maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 300 Hz IF bandwidth, without system error correction.

<b>Trace stability</b>		
Trace noise magnitude (RMS)	maximum port output power, IF bandwidth = 1 kHz, 0 dB reflection, port terminated with short standard	
	30 kHz ≤ f < 8 GHz	< 0.003 dB, 0.0015 dB (typ.)
	8 GHz ≤ f < 15 GHz	< 0.004 dB, 0.0020 dB (typ.)
	15 GHz ≤ f < 26.5 GHz	< 0.006 dB, 0.0040 dB (typ.)
Trace noise phase (RMS)	maximum port output power, IF bandwidth = 1 kHz, 0 dB reflection, port terminated with short standard	
	30 kHz ≤ f < 8 GHz	< 0.05°, 0.015° (typ.)
	8 GHz ≤ f < 26.5 GHz	< 0.06°, 0.025° (typ.)
Temperature dependence	at 0 dB reflection	
	30 kHz ≤ f < 26.5 GHz	
	magnitude	0.04 dB/K (meas.)
	phase	0.2°/K (meas.)

<b>Reflection and transmission measurements</b>		
Trace modes		clear/write, average, interference suppression
Result format		dB magnitude, phase, unwrapped phase, Smith, linear magnitude, real, imaginary, SWR, polar, group delay
Measurement range		-120 dB to +30 dB
db magnitude		
Range	selectable	1/2/3/5/10/20/30/50/100/120/130/150 dB
Resolution		0.01 dB
Linear magnitude		
Range	selectable	0 to 0.2, 0.5, 1, 2, 5, 10, 20, 50, 100, 200
Resolution		0.01
SWR		
Range	selectable	1 to 1.1, 1.5, 2, 3, 6, 11, 21 or 71
Resolution		0.01
Phase		
Range	selectable	90/180/360/1000° to 100000°, in 1/2/5 steps
Resolution		0.01°
Smith, polar		
Range		1
Resolution		0.01


<b>One-port cable loss measurement</b>		
Result format		magnitude
Range	selectable	1/2/5/10/20/50/100 dB
Resolution		0.01 dB

<b>Distance-to-fault analysis</b>		
Result formats		return loss, SWR, split screen DTF and SWR, split screen DTF and return loss
Return loss		
Range		1/2/3/5/10/20/30/50/100/120/130/150 dB
Resolution		0.01 dB
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 3, 6, 11, 21 or 71
Fault resolution		(1.5 m × 10 <sup>8</sup> × velocity factor / span)
Maximum cable length	depending on cable loss	1500 m (nom.)


<b>Trigger</b>		
Trigger source		free run, external
Input port		BNC
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
	maximum	3.0 V

## Measurement accuracy of the R&S<sup>®</sup>ZNH4/8/18

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S<sup>®</sup>ZN-Z170 calibration kit and TOSM/SOLT calibration. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

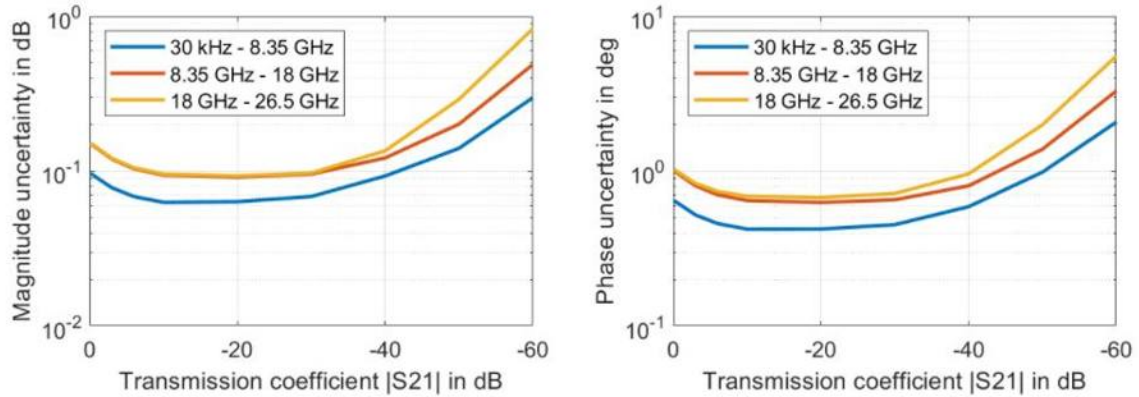

*Transmission uncertainty, measurement bandwidth of 100 Hz, nominal source power of -10 dBm and a coverage factor of  $k = 1$  (67 % confidence interval)*

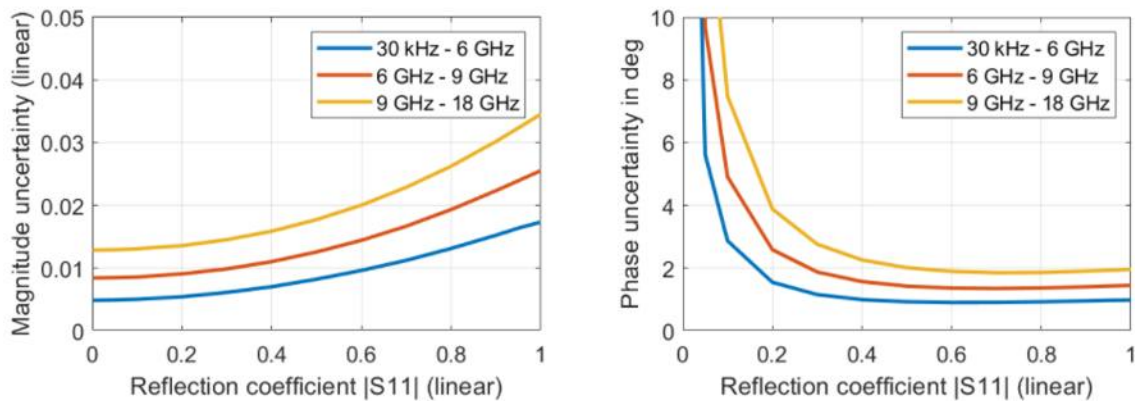

*Reflection uncertainty, measurement bandwidth of 10 Hz, nominal source power of -10 dBm and a coverage factor of  $k = 1$  (67 % confidence interval)*

## Effective system data of the R&S®ZNH4/8/18


This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZN-Z170 calibration kit and TOSM/SOLT calibration. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). This data is valid for a coverage factor of  $k = 1$  (67% confidence interval).

Effective system data in dB using R&S®ZN-Z170	to 6 GHz	to 9 GHz	to 18 GHz
Directivity	48	45	41
Source match	38	35	32
Reflection tracking	0.1	0.15	0.2
Load match	47	41	38
Transmission tracking	0.02	0.02	0.04




## Measurement accuracy of the R&S<sup>®</sup>ZNH26

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S<sup>®</sup>ZN-Z135 calibration kit and TOSM/SOLT calibration. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

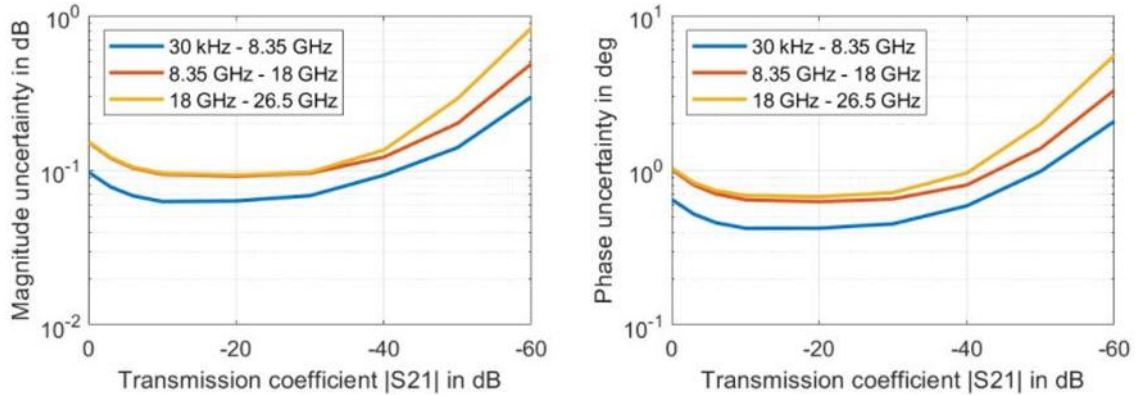

*Transmission uncertainty, measurement bandwidth of 100 Hz, nominal source power of -10 dBm and a coverage factor of  $k = 1$  (67 % confidence interval)*

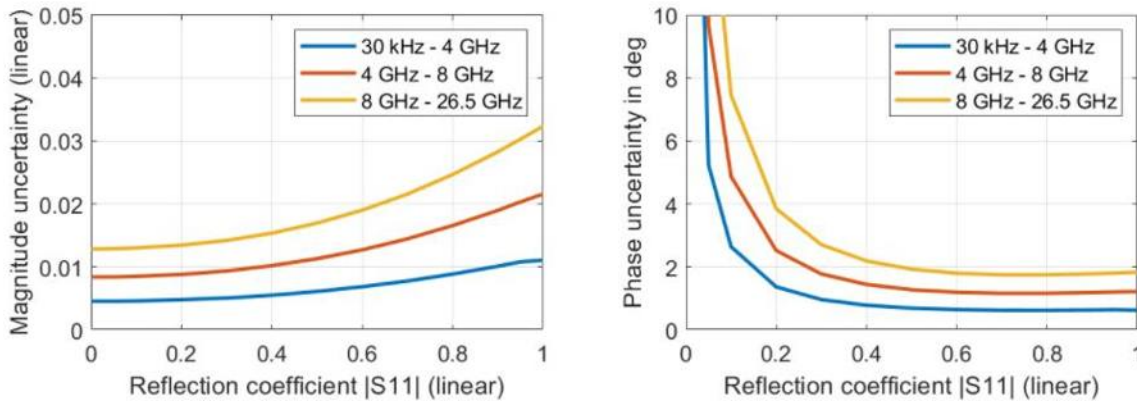

*Reflection uncertainty, measurement bandwidth of 10 Hz, nominal source power of -10 dBm and a coverage factor of  $k = 1$  (67 % confidence interval)*

## Effective system data of the R&S®ZNH26

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZN-Z135 calibration kit and TOSM/SOLT calibration. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). This data is valid for a coverage factor of  $k = 1$  (67% confidence interval).

Effective system data (dB) using R&S®ZN-Z135	to 4 GHz	to 8 GHz	to 26.5 GHz
Directivity	48	44	41
Source match	42	36	33
Reflection tracking	0.05	0.11	0.16
Load match	48	42	38
Transmission tracking	0.01	0.015	0.035

## Maximum rated input levels

DC voltage		50 V
CW RF power	port 1	23 dBm (= 0.2 W)
	port 2	23 dBm (= 0.2 W)

## General data

<b>Manual operation</b>		
Languages		Chinese, Chinese Traditional, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
<b>Remote control</b>		
Command set		SCPI 1997.0
LAN interface		10/100BASE-T, RJ-45
USB		mini B plug, version 2.0
<b>Display</b>	resolution	WVGA, 800 × 480 pixel
<b>Audio</b>	speaker	internal, external headphone supported
<b>USB interface</b>		2 × type A plug, version 2.0
<b>Mass memory</b>		USB flash drive/microSD card (not supplied) size ≤ 32 Gbyte, USB version 1.1 or 2.0
Data storage	internal	> 160 instrument settings and traces
	on USB flash drive or microSD card, ≥ 1 Gbyte	> 10000 instrument settings and traces
<b>Temperature</b>	operating temperature range	−10 °C to +55 °C
	storage temperature range	−40 °C to +70 °C
	battery charging mode	0 °C to +40 °C
<b>Climatic loading</b>	relative humidity	+25 °C/+55 °C at 95 % relative humidity, in line with EN 60068-2-30
	protection class	IP51
<b>Mechanical resistance</b>		
Vibration	sinusoidal	in line with EN 60068-2-6, MIL-PRF-28800F Class 2
	random	in line with EN 60068-2-64, MIL-PRF-28800F Class 2
Shock		40 g shock spectrum, in line with MIL-STD-810G, method 516.6, procedure I, MIL-PRF-28800F
<b>Power supply</b>		
R&S®HA-Z301 AC power supply	primary	100 V to 240 V AC, 50 Hz/60 Hz, 1.0 A to 0.5 A
	secondary	15 V, 2.67 A, max. 40 W
	operating temperature range	−30 °C to +60 °C
	storage temperature range	−40 °C to +85 °C
	test mark	CE, UL, PSE, TUV
External DC voltage		14.65 V to 15.45 V
<b>Battery</b>		
Capacity	R&S®HA-Z306 version E	72 Wh
	R&S®HA-Z306 version F and above	74.5 Wh
Voltage	R&S®HA-Z306 version E	11.25 V (nom.)
	R&S®HA-Z306 version F and above	10.8 V (nom.)
Operating time with new, fully charged battery	R&S®HA-Z306	4 h
Charging time	instrument switched off for charge with R&S®HA-Z303 battery charger	3 h
	instrument switched on	5 h
Life time	charging cycles	> 75 % or more of its initial capacity after 300 charge/discharge cycles
Power consumption		18.5 W (meas.)
<b>Safety</b>		
		IEC 61010-1, EN 61010-1, UL 61010-1 (third edition), CAN/CSA-C22.2 No. 61010-1-12
<b>Test mark</b>		
		VDE, cCSAus, KC
<b>EMC</b>	in line with EMC Directive 2014/30/EU including	<ul style="list-style-type: none"> <li>EN 61326-1</li> <li>EN 61326-1 table 2 (immunity, industrial)</li> <li>CISPR 11/EN 55011/Group 1 Class B (emission)</li> </ul>
<b>Dimensions</b>	W × H × D	202 mm × 294 mm × 76 mm (8.0 in × 11.6 in × 3 in)
<b>Weight</b>		3.1 kg (6.8 lb)
<b>Recommended calibration interval</b>		1 year

## Options

### R&S®ZNH-K10 DC bias option

DC bias		
Output port		BNC
Output voltage	mode: internal	+2 V to +32 V in 0.1 V steps (nom.)
Accuracy	< +3 V	< 1 V (nom.)
	≥ +3 V	< 0.5 V (nom.)
Maximum output power	mode: internal	
	operated with battery	7 W
	operated with AC mains	7 W
Maximum continuous output current	mode: internal	650 mA

### R&S®ZNH-K29 pulse measurements with power sensor

In combination with one of the power sensors R&S®NRP-Z81, R&S®NRP-Z85 or R&S®NRP-Z86, the R&S®ZNH4/-ZNH8/-ZNH18/-ZNH26 supports measurements on pulsed signals <sup>4</sup>. The achievable RF performance is documented in the data sheet specifications of the R&S®NRP-Z81/-Z85/-Z86 power sensors. The list below shows which measurements are supported by the R&S®ZNH-K29.

Measurements	R&S®ZNH-K29
Pulse power parameters	•
Peak power	•
Pulse top power	•
Average power	•
Base power	•
Minimum power	•
Positive overshoot	•
Negative overshoot	•
Pulse timing parameters	•
Pulse duration	•
Pulse period	•
Pulse start/stop time	•
Rise/fall time	•
Duty cycle	•

### R&S®ZNH-K45 vector voltmeter option

Reflection measurement		
Result formats	mode: vector voltmeter	magnitude + phase
Display range		approx. 1 dB to 150 dB
Transmission measurement		
Result formats	mode: vector voltmeter	magnitude + phase
Display range		approx. 1 dB to 150 dB

### R&S®ZNH-K66 wave ratios and wave quantities option

Wave quantity measurements	selectable	<ul style="list-style-type: none"> <li>transmitted wave measurement at port 1 (a<sub>1</sub>)</li> <li>received wave measurement at port 1 (b<sub>1</sub>)</li> <li>transmitted wave measurement at port 2 (a<sub>2</sub>)</li> <li>received wave measurement at port 2 (b<sub>2</sub>)</li> </ul>
Wave ratio measurements	selectable	<ul style="list-style-type: none"> <li>complex ratio of any transmitted or received wave quantities</li> <li>any ratio combination possible</li> </ul>
Source port	selectable	<ul style="list-style-type: none"> <li>port 1</li> <li>port 2</li> <li>source off</li> </ul>

<sup>4</sup> The R&S®NRP-Z8x power sensors are supported by instruments with serial number ≥ 105000.  
For instruments with serial number < 121000, the R&S®FSH-Z129 adapter cable is required in addition.

# Ordering information

Designation	Type	Frequency range	Order-No.
<b>Base kit</b>			
Handheld vector network analyzer, two ports, 4 GHz, type N	R&S®ZNH4		1321.1611.04
Handheld vector network analyzer, two ports, 8 GHz, type N	R&S®ZNH8		1321.1611.08
Handheld vector network analyzer, two ports, 18 GHz, type N	R&S®ZNH18		1321.1611.18
Handheld vector network analyzer, two ports, 26 GHz, PC 3.5mm	R&S®ZNH26		1321.1611.26
<b>Accessories supplied</b>			
Lithium-ion battery pack, USB cable, AC power supply with country specific adapters for EU, GB, US, AUS, CH, getting started manual, side strap			
<b>Software options</b>			
Power sensor support	R&S®ZNH-K9		1334.6800.02
DC bias variable voltage source	R&S®ZNH-K10		1334.6846.02
Pulse measurements with power sensor	R&S®ZNH-K29		1334.6823.02
Vector voltmeter	R&S®ZNH-K45		1334.6852.02
Wave ratios and wave quantities	R&S®ZNH-K66		1334.6869.02
<b>Calibration and verification</b>			
Calibration kit, 50 Ω	R&S®ZCAN	0 Hz to 3 GHz	0800.8515.52
Calibration kit, 75 Ω	R&S®ZCAN	0 Hz to 3 GHz	0800.8515.72
Calibration kit, 50 Ω (combined open/short)	R&S®FSH-Z28	0 Hz to 8 GHz	1300.7810.03
Calibration kit, 50 Ω (combined open/short)	R&S®ZFN-Z29	0 Hz to 3.6 GHz	1300.7510.03
Calibration kit, 3.5 mm (open/short/match/through male and female each)	R&S®ZN-Z235	0 Hz to 26.5 GHz	1336.8500.02
Calibration kit	R&S®ZN-Z103	2 MHz to 4 GHz	1321.1828.02
Calibration kit	R&S®ZN-Z103	1 MHz to 6 GHz	1321.1828.12
Calibration kit, 3.5 mm (m)	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.02
incl. DCV data on CD	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.12
incl. accredited calibration	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.22
Calibration kit, 3.5 mm (f)	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.03
incl. DCV data on CD	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.13
incl. accredited calibration	R&S®ZN-Z135	0 Hz to 26.5 GHz	1328.8157.23
Calibration kit, type N (m)	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.02
incl. DCV data on CD	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.12
incl. accredited calibration	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.22
Calibration kit, type N (f)	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.03
incl. DCV data on CD	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.13
incl. accredited calibration	R&S®ZN-Z170	0 Hz to 18 GHz	1328.8163.23
Test port cable, 3.5 mm (f) to 3.5 mm (m), length: 635 mm	R&S®ZV-Z93	0 Hz to 26.5 GHz	1301.7595.25
Test port cable, 3.5 mm (f) to 3.5 mm (m), length: 965 mm	R&S®ZV-Z93	0 Hz to 26.5 GHz	1301.7595.38
Test port cable, type N (m) to type N (m), length: 610 mm	R&S®ZV-Z191	0 Hz to 18 GHz	1306.4507.24
Test port cable, type N (m) to type N (m), length: 914 mm	R&S®ZV-Z191	0 Hz to 18 GHz	1306.4507.36
Test port cable, type N (m) to 3.5 mm (m), length: 610 mm	R&S®ZV-Z192	0 Hz to 18 GHz	1306.4513.24
Test port cable, type N (m) to 3.5 mm (m), length: 914 mm	R&S®ZV-Z192	0 Hz to 18 GHz	1306.4513.36
Test port cable, 3.5 mm (f) to 3.5 mm (m), length: 610 mm	R&S®ZV-Z193	0 Hz to 26.5 GHz	1306.4520.24
Test port cable, 3.5 mm (f) to 3.5 mm (m), length: 914 mm	R&S®ZV-Z193	0 Hz to 26.5 GHz	1306.4520.36
Test port cable, 3.5 mm (f) to 3.5 mm (m), length: 1524 mm	R&S®ZV-Z193	0 Hz to 26.5 GHz	1306.4520.60
Test port cable, 2.92 mm (f) to 2.92 mm (m), length: 635 mm	R&S®ZV-Z95	0 Hz to 40 GHz	1301.7608.25
Test port cable, 2.92 mm (f) to 2.92 mm (m), length: 965 mm	R&S®ZV-Z95	0 Hz to 40 GHz	1301.7608.38
Test port cable, 2.92 mm (f) to 2.92 mm (m), length: 610 mm	R&S®ZV-Z195	0 Hz to 40 GHz	1306.4536.24
Test port cable, 2.92 mm (f) to 2.92 mm (m), length: 914 mm	R&S®ZV-Z195	0 Hz to 40 GHz	1306.4536.36
<b>Power sensors supported by R&amp;S®ZNH-K9 (for average power measurement) and wideband power sensors supported by R&amp;S®ZNH-K29 (for pulse measurement)</b>			
Directional power sensor	R&S®FSH-Z14	25 MHz to 1 GHz	1120.6001.02
Directional power sensor	R&S®FSH-Z44	200 MHz to 4 GHz	1165.2305.02
Universal power sensor, 100 mW, two-path	R&S®NRP-Z211	10 MHz to 8 GHz	1417.0409.02
Universal power sensor, 100 mW, two-path	R&S®NRP-Z221	10 MHz to 18 GHz	1417.0309.02
Wideband power sensor, 100 mW	R&S®NRP-Z81	50 MHz to 18 GHz	1137.9009.02
Wideband power sensor, 100 mW (2.92 mm)	R&S®NRP-Z85	50 MHz to 40 GHz	1411.7501.02
Wideband power sensor, 100 mW (2.40 mm)	R&S®NRP-Z86	50 MHz to 40 GHz	1417.0109.40
Wideband power sensor, 100 mW (2.40 mm)	R&S®NRP-Z86	50 MHz to 44 GHz	1417.0109.44
Three-path diode power sensors, 100 pW to 200 mW	R&S®NRP8S	10 MHz to 8 GHz	1419.0006.02
Three-path diode power sensors, 100 pW to 200 mW	R&S®NRP18S	10 MHz to 18 GHz	1419.0029.02
Three-path diode power sensors, 100 pW to 200 mW	R&S®NRP33S	10 MHz to 33 GHz	1419.0064.02
Three-path diode power sensors, 100 pW to 200 mW	R&S®NRP40S	50 MHz to 40 GHz	1419.0041.02
Three-path diode power sensors, 100 pW to 200 mW	R&S®NRP50S	50 MHz to 50 GHz	1419.0087.02

Thermal power sensor, 300 nW to 100 mW	R&S®NRP18T	0 Hz to 18 GHz	1424.6115.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP33T	0 Hz to 33 GHz	1424.6138.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP40T	0 Hz to 40 GHz	1424.6150.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP50T	0 Hz to 50 GHz	1424.6173.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP67T	0 Hz to 67 GHz	1424.6196.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP90T	0 Hz to 90 GHz	1424.6473.02
Thermal power sensor, 300 nW to 100 mW	R&S®NRP110T	0 Hz to 110 GHz	1424.6215.02
Average power sensors, 100 pW to 200 mW	R&S®NRP6A	8 kHz to 6 GHz	1424.6796.02
Average power sensors, 100 pW to 200 mW	R&S®NRP18A	8 kHz to 18 GHz	1424.6815.02
<b>R&amp;S®FSH-Zxx power sensors require the following adapter cable for operation on the R&amp;S®ZNH</b>			
USB adapter cable to connect R&S®FSH-Z14/R&S®FSH-Z44 to the R&S®ZNH, length: 1.8 m	R&S®FSH-Z144		1145.5909.02
<b>R&amp;S®NRP-Zxx power sensors require the following adapter cable for operation on the R&amp;S®ZNH</b>			
USB adapter cable (passive), to connect R&S®NRP-Zxx to the R&S®ZNH, length: 2 m	R&S®NRP-Z4		1146.8001.02
<b>R&amp;S®NRP power sensors require the following adapter cable for operation on the R&amp;S®ZNH</b>			
USB interface cable, to connect R&S®NRP to the R&S®ZNH, length: 1.5 m	R&S®NRP-ZKU		1419.0658.03
<b>Optical power sensors and accessories</b>			
RF cable, armored, type N (m) to type N (f) connectors, length: 1 m	R&S®FSH-Z320	0 Hz to 8 GHz	1309.6600.00
RF cable, armored, type N (m) to type N (f) connectors, length: 3 m	R&S®FSH-Z321	0 Hz to 8 GHz	1309.6617.00
Attenuator, 50 W, 20 dB, 50 Ω, type N (f) to type N (m)	R&S®RDL50	0 Hz to 6 GHz	1035.1700.52
Attenuator, 100 W, 20 dB, 50 Ω, type N (f) to type N (m)	R&S®RBU100	0 Hz to 2 GHz	1073.8495.20
Attenuator, 100 W, 30 dB, 50 Ω, type N (f) to type N (m)	R&S®RBU100	0 Hz to 2 GHz	1073.8495.30
OEM USB optical power meter (Germanium)	R&S®HA-Z360		1334.5162.00
OEM USB optical power meter (filtered InGaAs)	R&S®HA-Z361		1334.5179.00
SC adapter for optical power meter	R&S®HA-Z362		1334.5185.00
LC adapter for optical power meter	R&S®HA-Z363		1334.5191.00
2.5 mm universal adapter for optical power meter	R&S®HA-Z364		1334.5204.00
1.25 mm universal adapter for optical power meter	R&S®HA-Z365		1334.5210.00
Patch cord SC-LC SM, SX, length: 1 m	R&S®HA-Z366		1334.5227.00
Patch cord SC-SC SM, SX, length: 1 m	R&S®HA-Z367		1334.5233.00
<b>Recommended extras</b>			
Battery charger for R&S®HA-Z306 <sup>5</sup>	R&S®HA-Z303		1321.1328.02
Lithium-ion battery pack, 6.4 Ah	R&S®HA-Z306		1321.1334.02
Spare power supply, incl. mains plug for EU, GB, US, AUS, CH	R&S®HA-Z301		1321.1386.02
Car adapter	R&S®HA-Z302		1321.1340.02
Carrying holster	R&S®HA-Z322		1321.1370.02
Rainproof carrying holster	R&S®HA-Z322		1321.1370.03
Soft carrying bag	R&S®HA-Z220		1309.6175.00
Hardcase	R&S®HA-Z321		1321.1357.02
Hard shell protective carrying case	R&S®RTH-Z4		1326.2774.02
Spare USB cable	R&S®HA-Z211		1309.6169.00
Spare Ethernet cable	R&S®HA-Z210		1309.6152.00
GPS receiver	R&S®HA-Z340		1321.1392.02
Matching pad, 50/75 Ω, L section	R&S®RAM		0358.5414.02
Matching pad, 50/75 Ω, series resistor 25 Ω	R&S®RAZ		0358.5714.02
Matching pad, 50/75 Ω, L section, type N to BNC	R&S®FSH-Z38		1300.7740.02
Adapter type N (m) to BNC (f)			0118.2812.00
Adapter type N (m) to type N (m)			0092.6581.00
Adapter type N (m) to SMA (f)			4012.5837.00
Adapter type N (m) to 7/16 (f)			3530.6646.00
Adapter type N (m) to 7/16 (m)			3530.6630.00
Adapter type N (m) to FME (f)			4048.9790.00
Adapter BNC (m) to banana (f)			0017.6742.00

<sup>5</sup> The battery charger is dedicated for charging an additional battery outside the instrument. The battery can be charged via the instrument as well.

<b>Warranty</b>		
Base unit		3 years
All other items <sup>6</sup>		1 year
<b>Options</b>		
Extended warranty, one year	R&S <sup>®</sup> WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S <sup>®</sup> WE2	
Extended warranty with calibration coverage, one year	R&S <sup>®</sup> CW1	
Extended warranty with calibration coverage, two years	R&S <sup>®</sup> CW2	
Extended warranty with accredited calibration coverage, one year	R&S <sup>®</sup> AW1	
Extended warranty with accredited calibration coverage, two years	R&S <sup>®</sup> AW2	

#### **Extended warranty with a term of one and two years (WE1 and WE2)**

Repairs carried out during the contract term are free of charge <sup>7</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

#### **Extended warranty with calibration coverage (CW1 and CW2)**

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>7</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

#### **Extended warranty with accredited calibration (AW1 and AW2)**

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>7</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

<sup>6</sup> For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>7</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

