

6½ Digit PXI Digital Multimeters (M9181A, M9182A, M9183A)

Overview

The Keysight Technologies, Inc. M9181A PXI digital multimeter provides the most popular measurement functions, including DCV, ACV, DCI, ACI, 2- and 4-wire resistance, at an affordable price. Keysight's M9182A and M9183A 6½ digit high performance PXI digital multimeters (DMMs) offer fast throughput, flexible measurements, and trustworthy results. The M9182A provides ten built-in measurement types with all the accuracy and stability you would expect from 6½ digit DMM. The M9183A provides the same capabilities as the M9182A, with market-leading measurement speed of up to 15,000 readings per second, additional ranges, and a DC source.

Key Features

- 6½ digit resolution
- High throughput: up to 15,000 rdgs/sec, 66 µs single reading interval
- DCV basic one year accuracy: up to 40 ppm
- DCV, ACV, DCI, ACI, 2- and 4-wire resistance measurements
- Various DMM measurement types and DC source function on higher-end models



Industries and Applications

- Aerospace and defense
- Automotive electronics test
- Industrial electronics test
- Medical device test
- Semiconductor and component test

Customer Values

- M9181A provides a low cost solution with the most common DMM measurements
- Measurements you can trust
- Higher test throughput due to the lowest latency
- Application development in the environment of your choice reduces development time
- Customer supportable calibration procedures as well as calibration services available from Keysight

PXI-DMM M918xA Feature Summary

All three products are 6½ digit PXI DMMs that take DCV, ACV, DCI, ACI, 2- and 4-wire resistance measurements.

DMM	Description	DCV basic 1 year accuracy	Maximum reading rate at 4½ digits	Other measurements	Triggering	DC source	Floating isolation	Connector compatibility
M9181A	Basic features PXI DMM	90 ppm	150 rdgs/sec, 6.7 ms single reading interval time	None	Immediate	n/a	CAT II 240 V	PXI-1 (J-1 only)
M9182A	High performance PXI DMM	40 ppm	4,500 rdgs/sec, 222 µs single reading interval time	Temperature, capacitance, frequency, period	Immediate, analog threshold, PXI trigger bus, external	n/a	CAT II 300 V	PXI-1 (J-1 only), PXIe hybrid slot
M9183A	Enhanced performance PXI DMM	40 ppm	15,000 rdgs/ sec, 66 µs single reading interval time	Temperature, capacitance, frequency, period, offset compensated Ω , pulse width, duty cycle, totalizer/ event counter	Immediate, analog threshold, PXI trigger bus, external	\pm 10 V \pm (1.2 µA to 12 mA)	CAT II 300 V	PXI-1 (J-1 only), PXIe hybrid slot

Easy Setup... Test... and Maintenance

Hardware Platform

Compliance

The M9181A, M9182A and M9183A 6½ digit DMMs are PXI compliant, using either a cPCI (J1) or PXI-1 (J1) slot. Additionally, the M9182A and M9183A are also compatible with the PXIe Hybrid slot. Designed to benefit from fast data interfaces, these PXI DMMs can be integrated with other test and automation modules in a PXI, Compact PCI, or Hybrid chassis. The PXI format offers high performance in a small, rugged package. It is an ideal deployment platform for many automated test systems. A wide array of complementary PXI products is currently available. Products from Keysight include switches, multiplexers, digitizers, waveform generators, and local oscillators.

Software Platform

IO Libraries Suite

Keysight IO Libraries Suite offers fast and easy instrument connections. IO Libraries Suite 16.1 supports PXI, helping you display all of the modules in your system, view information about installed software and allows you to more easily find the right driver and start module soft front panels directly with Keysight Connection Expert.

National Instruments IO libraries are also supported and may be used along with Keysight IO libraries.

Drivers

Keysight's digital multimeters come complete with software drivers for Windows Vista, and Windows 7 (32 and 64 bit). These software drivers work in the most popular test and measurement development environments including LabVIEW, Visual Studio (C, C++, C#, Visual Basic), MATLAB and VEE.

Easy Software Integration

Application code examples are included for LabVIEW, Visual Basic, C/C++, C#, and MATLAB – demonstrating DMM set up and basic functionality. These application code examples can be used to help you integrate the DMM module into your measurement system.

Soft Front Panel

The soft front panel provides easy to use instrument control. The graphical user interface guides developers through module setup so users can quickly configure the DMM.

One notable feature of the soft front panel is the Driver Call Log which allows the user to see the driver calls for each button pushed. The user can then incorporate the driver calls into their application program – enabling fast and easy program development.

Calibration

Each M9181A, M9182A and M9183A DMM is factory calibrated and shipped with an ISO-9002, NIST-traceable calibration certificate.

Calibration is required once per year. A documented calibration process allows you to do in-rack calibration using standard calibration sources. Alternatively, Keysight and 3rd party calibration labs offer calibration services for the PXI DMMs.

M9181A Technical Specifications and Characteristics

Function	Range	Frequency, test current or burden voltage	1 year 23 °C ± 5 °C
M9181A: Accuracy specifications \pm (% of reading + % of range) ^{1,2,3}			
DC voltage	200.0000 mV 2.000000 V 20.00000 V 200.0000 V		0.0100 + 0.0018 0.0090 + 0.0005 0.0120 + 0.0015 0.0100 + 0.0005
True RMS, AC voltage ^{4,5}	200.0000 mV	10 Hz - 20 Hz	3.60 + 0.35
		20 Hz - 47 Hz	0.50 + 0.35
		47 Hz - 10 kHz	0.16 + 0.35
		10 kHz - 50 kHz	0.40 + 0.35
		50 kHz - 100 kHz	2.20 + 0.50
	2.000000 V	10 Hz - 20 Hz	3.50 + 0.13
		20 Hz - 47 Hz	0.50 + 0.09
		47 Hz - 10 kHz	0.08 + 0.06
		10 kHz - 50 kHz	0.40 + 0.13
		50 kHz - 100 kHz	2.20 + 0.25
	20.00000 V	10 Hz - 20 Hz	4.50 + 0.18
		20 Hz - 47 Hz	0.65 + 0.15
		47 Hz - 10 kHz	0.09 + 0.12
		10 kHz - 50 kHz	0.30 + 0.18
		50 kHz - 100 kHz	1.70 + 0.25
	200.0000 V	10 Hz - 20 Hz	3.30 + 0.20
		20 Hz - 47 Hz	0.70 + 0.18
		47 Hz - 10 kHz	0.08 + 0.13
		10 kHz - 50 kHz	0.55 + 0.18
		50 kHz - 100 kHz	1.80 + 0.25
Resistance ⁶	200.0000 Ω 2.000000 kΩ 20.00000 kΩ 200.0000 kΩ 2.000000 MΩ 20.00000 MΩ	1 mA 1 mA 100 μA 10 μA 1 μA 100 nA	0.013 + 0.003 0.012 + 0.002 0.012 + 0.002 0.020 + 0.003 0.060 + 0.004 0.200 + 0.003
DC Current ⁷	2.000000 mA 20.00000 mA 200.0000 mA 2.000000 A	< 25 mV < 250 mV < 55 mV < 520 mV	0.050 + 0.050 0.050 + 0.005 0.050 + 0.040 0.200 + 0.005

True RMS, AC current ⁸	2.000000 mA	10 Hz - 20 Hz 20 Hz - 47 Hz 47 Hz - 1 kHz 1 kHz - 10 kHz	2.90 + 0.20 1.00 + 0.20 0.12 + 0.20 0.22 + 0.20
	20.00000 mA	10 Hz - 20 Hz 20 Hz - 47 Hz 47 Hz - 1 kHz 1 kHz - 10 kHz	2.80 + 0.15 1.00 + 0.15 0.16 + 0.15 0.40 + 0.20
	200.0000 mA	10 Hz - 20 Hz 20 Hz - 47 Hz 47 Hz - 1 kHz 1 kHz - 10 kHz	2.80 + 0.20 1.00 + 0.20 0.20 + 0.11 0.40 + 0.20
	2.000000 A	10 Hz - 20 Hz 20 Hz - 47 Hz 47 Hz - 1 kHz 1 kHz - 10 kHz	2.70 + 0.25 0.90 + 0.30 0.35 + 0.20 0.50 + 0.25

Function	Lowest Range	Sensitivity
M9181A Sensitivity (typ)		
DCV	200.0000 mV	100 nV
ACV	200.0000 mV	100 nV
Resistance	20.0000 Ω	100 μΩ
DCI	2.000000 mA	10 nA
ACI	2.000000 mA	1 nA

1. Specifications are for 1 hour warm up, within 1 hour self-cal, aperture ≥ 0.5 sec; null measurement for DCV, Ω, DCI.
2. For temperatures outside the range of $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$, but within 0 to 50°C , add $0.1 \times$ accuracy specification per $^{\circ}\text{C}$.
3. 20% overrange on all ranges.
4. Minimum input specified: 20 mV or 5% of range, whichever is larger.
5. Signal is limited to 8×10^6 volt Hz product. For example, at 100 kHz, the highest input is 80 V.
6. Specifications are for 4-wire resistance measurements, for 2-wire, add 1 mΩ.
7. For 2 mA and 200 mA DCI ranges, resolution is limited to 5½ digits.
8. Minimum input specified: 0.2 mA or 5% of range, whichever is greater.

M9182A / M9183A Technical Specifications and Characteristics

Function	Range ³	Frequency	24 hour 23 °C ± 1 °C	90 day 23 °C ± 5 °C	1 year 23 °C ± 5 °C
M9182A and M9183A: Accuracy specifications ±(% of reading + % of range)^{1,2}					
DC voltage ¹⁵	200.0000 mV		0.0030 + 0.0005	0.0040 + 0.0008	0.0050 + 0.0010
	2.000000 V		0.0020 + 0.0002	0.0030 + 0.0002	0.0040 + 0.0003
	20.00000 V		0.0040 + 0.0006	0.0050 + 0.0007	0.0070 + 0.0008
	200.0000 V		0.0030 + 0.0002	0.0040 + 0.0002	0.0050 + 0.0003
	300.0000 V		0.0130 + 0.0002	0.0230 + 0.0003	0.0250 + 0.0003
True RMS, AC voltage ^{4,5}	200.0000 mV ⁶	10 Hz -20 Hz	3.00 + 0.18	3.10 + 0.19	3.20 + 0.22
		20 Hz -47 Hz	0.37 + 0.08	0.38 + 0.09	0.40 + 0.10
		47 Hz - 10 kHz	0.13 + 0.05	0.14 + 0.06	0.15 + 0.06
		10 kHz - 50 kHz	0.25 + 0.08	0.26 + 0.10	0.27 + 0.12
		50 kHz - 100 kHz	1.90 + 0.18	1.95 + 0.19	2.00 + 0.20
	2.000000 V	10 Hz - 20 Hz	3.00 + 0.10	3.10 + 0.11	3.20 + 0.13
		20 Hz - 47 Hz	0.37 + 0.07	0.38 + 0.08	0.40 + 0.09
		47 Hz - 10 kHz	0.05 + 0.05	0.06 + 0.06	0.07 + 0.06
		10 kHz - 50 kHz	0.32 + 0.06	0.33 + 0.07	0.35 + 0.08
		50 kHz - 100 kHz	1.90 + 0.08	2.00 + 0.09	2.10 + 0.10
(Fast RMS off)	20.00000 V	10 Hz - 20 Hz	3.00 + 0.07	3.10 + 0.08	3.30 + 0.10
		20 Hz - 47 Hz	0.37 + 0.06	0.38 + 0.07	0.40 + 0.08
		47 Hz - 10 kHz	0.06 + 0.05	0.07 + 0.06	0.07 + 0.07
		10 kHz - 50 kHz	0.18 + 0.09	0.20 + 0.11	0.22 + 0.13
		50 kHz - 100 kHz	1.30 + 0.15	1.40 + 0.18	1.50 + 0.20
	200.0000 V & 300.0000 V	10 Hz - 20 Hz	3.00 + 0.07	3.10 + 0.08	3.30 + 0.08
		20 Hz - 47 Hz	0.43 + 0.06	0.44 + 0.07	0.45 + 0.08
		47 Hz - 10 kHz	0.07 + 0.05	0.08 + 0.07	0.09 + 0.08
		10 kHz - 50 kHz	0.28 + 0.07	0.30 + 0.08	0.32 + 0.10
		50 kHz - 100 kHz	1.30 + 0.09	1.60 + 0.12	2.40 + 0.13

M9182A / M9183A Technical Specifications and Characteristics (continued)

Function	Range ³	Frequency or Test Current	24 hour 23 °C ± 1 °C	90 day 23 °C ± 5 °C	1 year 23 °C ± 5 °C
M9182A and M9183A: Accuracy specifications ±(% of reading + % of range)^{1,2}					
True RMS, AC voltage ^{4,5}	200.0000 mV ⁶	350 Hz - 800 Hz	0.60 + 0.08	0.65 + 0.09	0.70 + 0.10
		800 Hz - 10 kHz	0.13 + 0.05	0.14 + 0.06	0.15 + 0.06
		10 kHz - 50 kHz	0.55 + 0.08	0.60 + 0.10	0.63 + 0.12
		50 kHz - 100 kHz	5.30 + 0.18	5.40 + 0.19	5.60 + 0.20
	2.000000 V	350 Hz - 800 Hz	0.93 + 0.07	0.96 + 0.08	1.00 + 0.09
		800 Hz - 10 kHz	0.07 + 0.05	0.08 + 0.06	0.08 + 0.06
		10 kHz - 50 kHz	0.62 + 0.06	0.65 + 0.07	0.70 + 0.08
		50 kHz - 100 kHz	5.10 + 0.08	5.20 + 0.09	5.30 + 0.10
	20.00000 V	350 Hz - 800 Hz	0.93 + 0.06	0.96 + 0.07	1.00 + 0.08
		800 Hz - 10 kHz	0.07 + 0.05	0.07 + 0.06	0.07 + 0.07
		10 kHz - 50 kHz	0.31 + 0.09	0.33 + 0.11	0.35 + 0.13
		50 kHz - 100 kHz	2.00 + 0.15	2.20 + 0.18	2.40 + 0.20
	200.0000 V & 300.0000 V	350 Hz - 800 Hz	1.00 + 0.06	1.10 + 0.07	1.10 + 0.08
		800 Hz - 10 kHz	0.07 + 0.05	0.07 + 0.07	0.08 + 0.08
		10 kHz - 50 kHz	0.34 + 0.07	0.45 + 0.08	0.50 + 0.10
		50 kHz - 100 kHz	2.50 + 0.09	2.80 + 0.12	3.20 + 0.13
Resistance ^{7,15}	20.00000 Ω (M9183A only)	10 mA	0.004 + 0.004	0.009 + 0.004	0.014 + 0.005
	200.0000 Ω	1 mA	0.004 + 0.002	0.010 + 0.002	0.013 + 0.003
	2.000000 kΩ	1 mA	0.003 + 0.002	0.008 + 0.002	0.012 + 0.002
	20.00000 kΩ	100 μA	0.003 + 0.002	0.008 + 0.002	0.012 + 0.002
	200.0000 kΩ	10 μA	0.006 + 0.002	0.010 + 0.002	0.016 + 0.003
	2.000000 MΩ	1 μA	0.018 + 0.002	0.030 + 0.003	0.040 + 0.004
	20.00000 MΩ	100 nA	0.120 + 0.002	0.130 + 0.003	0.200 + 0.003
	200.0000 MΩ (M9183A , 2-wire only)	4 nA	0.800 + 0.013	1.000 + 0.015	1.300 + 0.025

M9182A / M9183A Technical Specifications and Characteristics (continued)

Function	Range ³	Frequency or Burden Voltage	24 hour 23 °C ± 1 °C	90 day 23 °C ± 5 °C	1 year 23 °C ± 5 °C
M9182A and M9183A: Accuracy specifications ±(% of reading + % of range)^{1,2}					
DC Current ¹⁵	200.0000 nA (M9183A only)	< 100 µV	0.130 + 0.020	0.160 + 0.023	0.170 + 0.030
	2.000000 µA (M9183A only)	< 100 µV	0.050 + 0.004	0.080 + 0.003	0.210 + 0.008
	20.00000 µA (M9183A only)	< 100 µV	0.050 + 0.002	0.080 + 0.003	0.130 + 0.004
	200.0000 µA (M9183A only)	< 2.5 mV	0.052 + 0.100	0.070 + 0.150	0.100 + 0.200
	2.000000 mA	< 25 mV	0.020 + 0.015	0.030 + 0.020	0.040 + 0.028
	20.00000 mA	< 250 mV	0.020 + 0.002	0.035 + 0.003	0.045 + 0.003
	200.0000 mA	< 55 mV	0.020 + 0.025	0.030 + 0.030	0.040 + 0.040
	2.000000 A	< 520 mV	0.100 + 0.003	0.150 + 0.004	0.200 + 0.005
True RMS, AC current ⁸	2.000000 mA ⁹	10 Hz - 20 Hz	2.70 + 0.20	2.90 + 0.20	2.90 + 0.20
		20 Hz - 47 Hz	0.90 + 0.20	0.90 + 0.20	1.00 + 0.20
		47 Hz - 1 kHz	0.04 + 0.08	0.08 + 0.15	0.12 + 0.20
		1 kHz - 10 kHz	0.12 + 0.20	0.14 + 0.20	0.22 + 0.20
	20.00000 mA	10 Hz - 20 Hz	1.80 + 0.15	2.60 + 0.15	2.80 + 0.15
		20 Hz - 47 Hz	0.60 + 0.15	0.90 + 0.15	1.00 + 0.15
		47 Hz - 1 kHz	0.07 + 0.05	0.15 + 0.10	0.16 + 0.15
		1 kHz - 10 kHz	0.21 + 0.15	0.30 + 0.20	0.40 + 0.20
	200.0000 mA	10 Hz - 20 Hz	1.80 + 0.20	2.70 + 0.20	2.80 + 0.20
		20 Hz - 47 Hz	0.60 + 0.20	0.90 + 0.20	1.00 + 0.20
		47 Hz - 1 kHz	0.15 + 0.08	0.17 + 0.09	0.20 + 0.11
		1 kHz - 10 kHz	0.30 + 0.15	0.35 + 0.18	0.40 + 0.20
	2.000000 A	10 Hz - 20 Hz	1.80 + 0.20	2.50 + 0.23	2.70 + 0.25
		20 Hz - 47 Hz	0.66 + 0.30	0.80 + 0.30	0.90 + 0.30
		47 Hz - 1 kHz	0.30 + 0.19	0.33 + 0.19	0.35 + 0.20
		1 kHz - 10 kHz	0.40 + 0.20	0.45 + 0.23	0.50 + 0.25
Frequency or Period ^{10,} ¹⁴	200 mV to 300V	1Hz - 20 Hz	0.08 + 0.01	0.08 + 0.01	0.08 + 0.01
		20 Hz - 130 Hz	0.03 + 0.01	0.03 + 0.01	0.03 + 0.01
		130 Hz - 640 Hz	0.03 + 0.01	0.03 + 0.01	0.03 + 0.01
		640 Hz - 2.5 kHz	0.03 + 0.01	0.03 + 0.01	0.03 + 0.01
		2.5 kHz - 40 kHz	0.03 + 0.01	0.03 + 0.01	0.03 + 0.01
		40 kHz - 200 kHz	0.05 + 0.01	0.05 + 0.01	0.05 + 0.01
		200 kHz - 300 kHz	0.07 + 0.01	0.07 + 0.01	0.07 + 0.01

M9182A / M9183A Technical Specifications and Characteristics (continued)

Function	Range	Full scale reading or resolution	24 hour 23 °C ± 1 °C	90 day 23 °C ± 5 °C	1 year 23 °C ± 5 °C
M9182A and M9183A: Accuracy specifications ±(% of reading + % of range)^{1,2}					
Single shot duty cycle ¹¹ [M9183A only]	2 - 100 Hz 100 Hz - 1 kHz 1 - 10 kHz	0.02 % 0.20 % 2.00 %	0.03 ± 0.03 0.03 ± 0.30 0.03 ± 3.00	0.03 ± 0.03 0.03 ± 0.30 0.03 ± 3.00	0.03 ± 0.03 0.03 ± 0.30 0.03 ± 3.00
Single shot pulse width ^{12, 14} [M9183A only]	14 µs - 62.5 ms	1 µs	.01 ± 4 µs	.01 ± 4 µs	.01 ± 4 µs
Capacitance ¹³ [M9183A and M9182A]	1000.0 pF 10.000 nF 100.00 nF 1.0000 µF 10.000 µF 100.00 µF 1.0000 mF 10.000 mF	1199.9 pF 11.999 nF 119.99 nF 1.1999 µF 11.999 µF 119.99 µF 1.1999 mF 11.999 mF	1.00 + 0.10 1.20 + 0.05 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.20 + 0.10 2.00 + 0.10	1.00 + 0.10 1.20 + 0.05 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.20 + 0.10 2.00 + 0.10	1.00 + 0.10 1.20 + 0.05 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.00 + 0.10 1.20 + 0.10 2.00 + 0.10

1. Specifications are for 1 hour warm up, within 1 hour self-cal, aperture ≥ 0.5 sec. Slow AC filter for AC measurements only.
2. For temperatures outside the range of 23 °C ± 5 °C, but within 0 °C to 50 °C, add 0.1 × accuracy specification per °C.
3. 20% over range on all ranges except 300 V range, 10% over range for 300 V range.
4. Minimum input specified: 5 mV or 1% of range, whichever is larger.
5. Signal is limited to 8x106 Volt Hz product. For example, at 32 kHz, the highest input is 250 V.
6. For inputs from 5 mV to 15 mV, add 100 µV to the specification.
7. Specifications are for 4-wire resistance measurements, for 2-wire, add 1 mΩ additional error to the specification; for offset compensated ohms (M9183A only), add 0.02% of range.
8. Minimum input specified: 60 µA or 1.5% of range, whichever is larger; for inputs < 5% of full scale, add 0.02% of range.
9. For inputs from 60 to 120 µA, add 10 µA to the specification; for inputs < 5% of full scale, add 0.1% of range.
10. Minimum amplitude greater of: 100 mV, or 5 % of range for 1 Hz to 2.5 kHz, or 25 % of range for 2.5 kHz to 200 kHz, or 40% of range for 200 kHz to 300 kHz.
11. Specifications are % of reading (0.03) ± adder.
12. Specifications are % of reading + time.
13. Specifications apply to input signals ≥ 5% of range.
14. Maximum wait time for duty cycle and period is 5 seconds.
15. DCV, DCI & Resistance specifications only valid with the math NULL feature enabled.

Definitions for Specifications

Specification (spec)

Represents warranted performance of a calibrated instrument that has been stored for a minimum of two hours within the operating temperature range of 0 to 50 °C, unless otherwise stated, and after a one-hour warm-up period. The specifications include measurement uncertainty. Data represented in this document are specifications unless otherwise noted.

Typical (typ)

Represents characteristic performance, which 80% of the instruments manufactured will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 25 °C).

Nominal (nom)

The expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ω connector. This data is not warranted and is measured at room temperature (approximately 25 °C).

Measured (meas)

An attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

Note: All graphs contain measured data from several units at room temperature unless otherwise noted.

M9182A / M9183A Technical Specifications and Characteristics (continued)

Function	Lowest Range	Sensitivity
M9182A and M9183A Sensitivity (nom)		
DCV	200.0000 mV	0.1 µV
ACV	200.0000 mV	0.1 µV
Resistance (M9183A)	20.00000 Ω	10 µΩ
Resistance (M9182A)	200.0000 Ω	100 µΩ
DCI (M9183A)	200.0000 nA	0.1 pA
DCI (M9182A)	2.000000 mA	10 nA
ACI	2.000000 mA	1 nA
Capacitance	1000.0 pF	0.1 pF

Temperature Function	Type	R ₀ (Ω)	Sensitivity	Range/max temperature	1 year 23 °C ± 5 °C
M9182A and M9183A temperature accuracy (spec)¹					
RTD temperature measurement ^{2,3}	pt385	100 Ω, 200 Ω	0.01 °C	-150 to 650 °C	± 0.06 °C
		500 Ω, 1 kΩ	0.01 °C	-150 to 650 °C	± 0.03 °C
Thermocouple temperature measurement ^{4,5}	Cu (Copper)	Less than 12 Ω	0.01 °C	-100 to 200 °C	± 0.18 °C at ≤ 20 °C ± 0.05 °C otherwise
		Higher than 90 Ω	0.01 °C	-100 to 200 °C	± 0.10 °C at ≤ 20 °C ± 0.05 °C otherwise
Thermocouple temperature measurement ^{4,5}	B	NA	0.01 °C	2200 °C	± 0.38 °C
	E	NA	0.01 °C	1200 °C	± 0.035 °C
	J	NA	0.01 °C	2000 °C	± 0.06 °C
	K	NA	0.01 °C	3000 °C	± 0.07 °C
	N	NA	0.01 °C	3000 °C	± 0.10 °C

	R	NA	0.01 °C	2700 °C	± 0.25 °C
	S	NA	0.01 °C	3500 °C	± 0.35 °C
	T	NA	0.01 °C	550 °C	± 0.06 °C
Thermistor ³	2.25 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C
	5 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C
	10 kΩ	NA	0.01 °C	-80 to 150 °C	± 0.1 °C


1. Specifications are for one hour warm up, within one hour self-cal, aperture ≥ 0.5 sec.
2. 4-wire RTD measurement, R₀ variable 1 Ω to 7 k Ω.
3. For total measurement accuracy, add temperature probe error.
4. For total measurement accuracy, add thermocouple error and cold junction compensation.
5. DMM linearization temperature range may be greater than that of the thermocouple device.

Source-Measure [(spec) unless otherwise stated]

Parameter	Closed Loop	Open Loop
M9183A source DC voltage, measure DC voltage		
DC voltage source (output) range	+10 to -10 V	+10 to -10 V
DC source sink current at 5 V output	5 mA	5 mA
DAC resolution (nom)	18 bits /12 bits	12 bits
DC voltage source accuracy 1 Year, 23° \pm 5° C	0.015% \pm 0.0004	1.00% \pm 0.04
Settling time (typ)	100 ms/1 ms	1 ms
Source resistance (nom)	200 ohms	200 ohms

M9183A source DC voltage, measure DC voltage		
DC voltage source (output) range	-10.000 to +10.000 V	
DC current measurement range	0 to \pm 20 mA	

Voltage resolution (nom)	5 mV
Voltage source accuracy 1 Year, ($23^{\circ}\text{C} \pm 5^{\circ}\text{C}$) ^{1,2,3,4}	$2.0\% \pm 0.4\%$
Settling time (typ)	100 ms
DC current measurement accuracy	$0.1\% + 0.005\%$

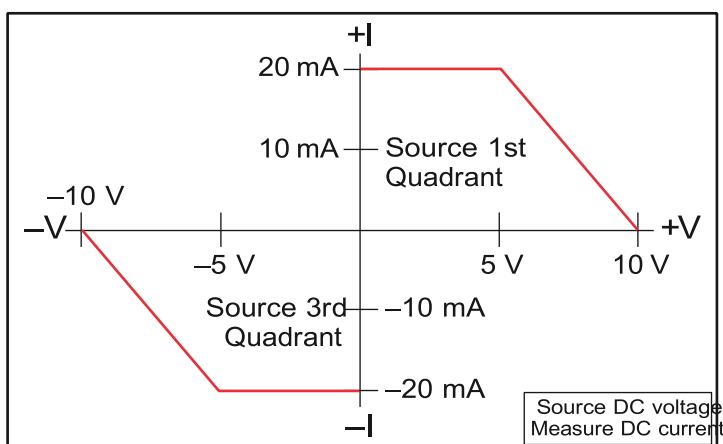

Current output	Compliance voltage	Minimum level	Source accuracy 1 year, ($23^{\circ}\text{C} \pm 5^{\circ}\text{C}$) ^{1,2,3}
M9183A source DC current, measure DC voltage			
DC voltage measurement range		0 to ± 2.0 V	
< 1.25 μA	4.2 V	10 nA	1% + 1%
< 12.5 μA	4.2 V	50 nA	1% + 1%
< 125 μA	4.2 V	100 nA	1% + 0.5%
< 1.25 mA	4.2 V	1 μA	1% + 0.5%
< 12.5 mA	1.2 V	10 μA	1% + 0.5%

1. Specifications are for one hour warm up, within one hour self-cal, slow AC filter.
2. For temperatures outside the range of $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$, but within 0°C to 50°C , add $0.1 \times$ accuracy specification per $^{\circ}\text{C}$.
3. Repetitive reading at an aperture of 133 ms or higher.
4. If DCV source > 6 V, then add current * 4 ohms; if DCV source > 8 V, then add current * 30 ohms.

Triggering Characteristics



The M9182A and M9183A have advanced triggering capabilities that exceed those found on other digital multimeters. Advanced triggering enables you to obtain the signal you need and accurately measure it, in a variety of applications.

External hardware trigger		
Trigger input voltage level range (at DIN 7 connector)		+3 to +15 V activates the trigger
Minimum trigger pulse width		Aperture + 50 µs
Trigger input impedance		3 kΩ
Edge		Selectable positive or negative edge
PXI bus trigger inputs		
Trigger input voltage level range (via PXI backplane)		CMOS level (see PXI standard)
Minimum trigger pulse width		Aperture + 50 µs
Edge		Selectable positive or negative edge
Trigger features		
Trigger sources		Immediate, PXI trigger , external DIN connector, analog threshold trigger source
Trigger delay [Auto delay (default delay) ensures 1st reading accuracy in most configurations]	Measurement delay	50 µs to 15 s
	Resolution	1µs to 65ms and 16µs above 65ms
Reading storage		Circular buffer - 80 readings
Multi Sample Mode (DCV and DCI functions only)	Aperture range	2.5 µs to 160 ms (M9183A)
		130 µs to 160 ms (M9182A)
	Maximum read interval range	1 sec for apertures \geq 625 µs, else 65 ms
	Reading per trigger	Up to 80 readings (maximum of 78 pre-triggers or a maximum of 80 post triggers)
	Trigger sources	PXI trigger, external DIN connector, and analog threshold (accuracy within 5% of range)

Measurement Characteristics

Measurement aperture	Maximum readings per second	Resolution
M9181A Resolution vs. Aperture and Reading Rate for DCV, DCI, Ω		
1.28 s	0.8	6½ digits (21 bits)
160 ms	6	6 digits (20 bits)
20 ms	45	5½ digits (18 bits)
10 ms	85	5 digits (17 bits)
5 ms	150	4½ digits (16 bits)
M9182A / M9183A Resolution vs. Aperture and Reading Rate for DCV, DCI, Ω		
10 ms	98	6½ digits (22 bits)
625 µs	1,200	5½ digits (18 bits)
130 µs	4,500	4½ digits (14 bits)
2.5 µs	15,000 (M9183A only) ¹	4½ digits (14 bits)

1. 15,000 readings/second represent a typical maximum with a measurement aperture of 2.5 µs. Results will vary, depending on what PC hardware, PXI hardware, and driver are used.

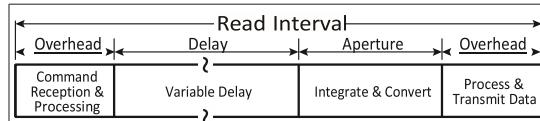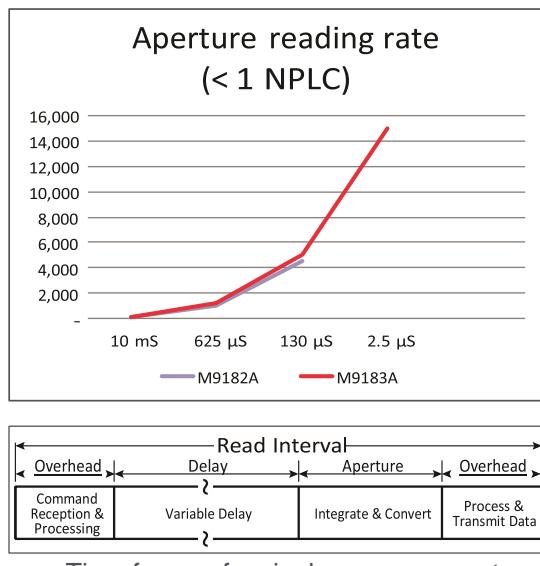

Time frame of a single measurement

Minimum read interval = 66 µs (M9183A)
Minimum read interval = 222 µs (M9182A)

Measurement Characteristics (continued)

Transaction Speed

Transactional I/O speed is a single reading measurement. This is important when you are taking many single measurements with the DMM. The M9183A delivers the highest transactional measurement speed in its class. These fast readings, up to 15,000 readings per second with a read interval rate of 66 μ s, provides the lowest latency, translating into higher test-system throughput and lower cost of test per unit tested. Variable delay can be programmed to allow fully settled readings in most configurations.

System Reading and Throughput Rates (M9182A/3A)

Switching ranges within a function	Aperture (A)	Range change time (ms)
DCV	A ≤ 20 ms	(A × 0.2) + 15
	A > 20 ms	A + 15.6
Resistance (2-wire or 4-wire)	A < 33 ms	(A × 0.05) + 15.5
	A ≥ 33 ms	A + 13
DCI (200 mA or 2 A to any other range)	A ≤ 40 ms	4.2
	A > 40 ms	15.7
DCI (all other ranges)	All apertures	1
Capacitance	All apertures	12

Switch between functions	Aperture (A)	Function change time (ms)
DCV	A < 16 ms	15.6
	A ≥ 16 ms	A + 25
Resistance to DCI	A < 16.66 ms	7.8
	16.66 ms ≤ A < 40 ms	A × 0.65
	40 ms < A < 66.66 ms	7.8
	A ≥ 66.66 ms	(A × 0.51) + 45
DCV to capacitance	A < 33.33 ms	23.4
	A ≥ 33.33 ms	(A × 0.65) + 50

Resistance to capacitance	$A \leq 33.33 \text{ ms}$	23.4
	$33.33 \text{ ms} < A < 80 \text{ ms}$	$(A \times 2) + 35$
	$80 \text{ ms} \leq A < 160 \text{ ms}$	23.4
	$A \geq 160 \text{ ms}$	160

DC Voltage	
Measurement method	Delta-sigma A/D conversion
Input resistance	200 mV, 2.0 V ranges: $>10 \text{ G}\Omega$ with typical leakage of $< 50 \text{ pA}$; M9181A: 20 V, 200 V ranges: $10.0 \text{ M}\Omega$ M9182A/3A: 20 V, 200 V, 300 V ranges: $10.0 \text{ M}\Omega$
Input isolation	M9181A: 240 V from Earth ground M9182A/3A: 330 VDC, 250 VAC from Earth ground
Input overvoltage protection	M9181A: 300 VDC on voltage inputs M9182A/3A: 330 VDC all ranges
DCV noise rejection	M9181A: Normal mode rejection at 50, 60, or 400 Hz $\pm 0.5\%$; $> 90 \text{ dB}$ (apertures $\geq 0.160 \text{ s}$); CMRR (1 k Ω lead imbalance) $\geq 100 \text{ dB}$ M9182A/3A: Normal mode rejection at 50, 60, or 400 Hz $\pm 0.5\%$; $> 95 \text{ dB}$ (apertures $\geq 0.160 \text{ s}$); CMRR (1 k Ω lead imbalance) $\geq 120 \text{ dB}$

True RMS AC Voltage	
Measurement method	M9181A: AC coupled (10 Hz to 100 kHz) true RMS — measures the AC component only. Analog RMS DC converter. M9182A/3A: AC coupled (10 Hz to 100 kHz) true RMS — measures the AC component of an input waveform that consists of AC and DC components.
Crest factor	Maximum crest factor of 4 at full scale, 7 at 10% of range
Input impedance	1 M Ω , in parallel with $< 300 \text{ pF}$
Settling time	< 0.5 sec to within 0.1% of final value Fast RMS (M9182A/3A): < 0.05 sec to within 0.1% of final value

Peak input	8×10^6 volt Hz product (example: 250 V @ 32 kHz)
Input overvoltage protection	M9181A: 250 VAC on voltage inputs
	M9182A/3A: 330 VAC all ranges
ACV noise rejection	Common mode rejection at 50 Hz or 60 Hz; 1 kΩ imbalance in either lead > 60 dB
Resistance	
Measurement method	Selectable 2-wire or 4-wire. Current source referenced to LO output
Offset compensation (M9183A only)	All ranges, use with apertures > 5 ms $V_{offset} + (I^*R) < 2.2$ V for ranges ≥ 2 kΩ $V_{offset} + (I^*R) < 0.22$ V for ranges < 2 kΩ
Maximum test voltage	M9181A: 240 mV for 200 Ω ranges; 2.4 V for 20 kΩ to 20 MΩ ranges
	M9182A/3A: 240 mV for 20 Ω and 200 Ω ranges; 2.4 V for 20 kΩ to 20 MΩ ranges
	M9183A only: 1.0 V for 200 MΩ range
Maximum lead resistance (4-wire)	50 kΩ for 200 kΩ, 2.0 MΩ, and 20 MΩ ranges; 5 kΩ for 20 kΩ range 500 Ω for 200 Ω and 2 kΩ ranges; 50 Ω for 20 Ω range
Input protection	M9181A: 300 V on all ranges M9182A/3A: 330 V on all ranges
DC Current	
Shunt resistance	10 Ω for 2 mA and 20 mA, 0.1 Ω for 200 mA and 2 A; Virtual zero shunt for 200 μA, 20 μA, 2 μA, and 200 nA range (M9183A only)
Input protection	Protected with 2.5 A, 250 V fast blow fuse
True RMS AC Current	
Measurement method	AC coupled true RMS measurement (measures the AC component only.) Analog RMS DC converter.
Shunt resistance	10 Ω for 2 mA and 20 mA, 0.1 Ω for 200 mA and 2 A
Input protection	Protected with 2.5 A, 250 V fast blow fuse

Frequency and period (M9182A and M9183A)	
Measurement method	Direct (conventional) counting
Input impedance	1 MΩ with < 300 pF
Sensitivity (130 Hz)	.001 Hz
Totalizer (M9183A only)	
Active edge polarity	Positive or negative transition
Maximum count	10,000,000,000
Allowed rate	1 to 30,000 events per second
Threshold	Set threshold DAC
Accuracy	±2 counts
Capacitance (M9182A and M9183A)	
Measurement method	Differential charge balance: variable currents used to stimulate dV/dt response.
Connection type	2-wire

Environmental and physical characteristics		
Temperature range	Operating -10° to 55 °C Non-operating -40 ° to +85 °C	
Relative humidity	Operating to 80% at 40 °C Full accuracy to 40% RH for 41 °C to 55 °C (non-condensing)	
Max operative altitude	2000m (10,000 feet)	
Connectors	V HI*, 2-wire Ω IN, DCV OUT V LO*, 2-wire Ω IN, DCV OUT I HI*, 4-wire Ω IN I LO*, 4-wire Ω IN Sync OUT** External Trigger IN** Trigger and Sync common**	Sheathed banana jack Sheathed banana jack Sheathed banana jack Sheathed banana jack DIN 7, pin 2 DIN 7, pin 7 DIN 7, pin 4
Safety & EMC	Refer to Declaration of Conformity for the latest revisions of regulatory compliance at: www.keysight.com/go/conformity	
Warm-up time	1 hour	

* Do not connect the V HI and V LO or I HI and I LO connectors to anything when the measurement function does not utilize those connectors.

** M9182A & M9183A only

Physical characteristics	
Dimensions	3U/1-slot PXI/CompactPCI standard
Weight	0.5 kg (1 lb.)
Power dissipation	
+5 V	Total power
300 mA	1.5 W max

Configuration

Model	Description
Hardware	
M9181A	PXI 6½ digit multimeter, basic features
M9182A	PXI 6½ digit multimeter, high performance
M9183A	PXI 6½ digit multimeter, enhanced performance
Software	
Supported Operating Systems	Microsoft Windows XP (32-bit), Microsoft Windows Vista (32/64-bit), Microsoft Windows 7 (32/64-bit)
Standard Compliant Drivers	IVI-C, IVI-COM, LabVIEW
Supported Application Development Environments (ADE)	VisualStudio (VB.NET, C#, C/C++), LabVIEW, MATLAB, VEE
Keysight IO Libraries	Includes: VISA Libraries, Keysight Connection Expert, IO Monitor
Accessories	
34138A	Test lead set

Related Products

Model	Description
M9018A	18-slot PXIe chassis
M9021A	PCIe cable interface to an external system controller
M9036A	Embedded controller
M9101A	PXI high-density multiplexer, 64 channels, reed relays
M9103A	PXI high-density multiplexer, 99 channels, armature relays
M9120A	PXI high-density matrix switch, 4x32, armature relays
M9121A	PXI high-density matrix switch, 4x64, reed relays

Visit www.keysight.com/find/pxi-dmm to find out more.

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

