

# N9042B UXA X-Series Signal Analyzer, Multi-touch

2 Hz to 26.5, 44, or 50 GHz

with V3050A Signal Analyzer Frequency Extender

50 GHz to 67, 90, or 110 GHz



## Table of Contents

Introduction.....	3
Data Sheet Definition and Terms .....	3
Frequency and Time Specifications .....	5
Phase Noise (SSB) .....	6
Triggers and Gating .....	7
Swept Spectrum Analysis .....	9
Amplitude Accuracy .....	10
Amplitude Range.....	13
DANL (Displayed Average Noise Level) .....	14
TOI .....	17
SHI .....	18
Gain Compression .....	18
Residuals, Images, and Spurious Responses .....	19
Wide-Bandwidth IQ Analysis (Demod).....	20
5GNR EVM Residuals (“Floor”) vs Power (“Bathtub Curves”).....	21
25 MHz Analysis Bandwidth (licensed as option B25).....	23
40 MHz Analysis Bandwidth (licensed as option B40).....	24
255 MHz Analysis Bandwidth (licensed as option B2X) .....	25
1 GHz Analysis Bandwidth (option R10).....	26
1.5 GHz Analysis Bandwidth (option R15).....	28
2 GHz Analysis Bandwidth (opt R20).....	29
4 GHz Analysis Bandwidth (opt R40).....	31
Inputs and Outputs.....	33
Front Panel.....	33
Rear Panel .....	34
General Specifications .....	37
V3050A Signal Analyzer Frequency Extender.....	38
Frequency .....	39
Phase Noise.....	40
Amplitude .....	40
DANL (Displayed Average Noise Level) .....	41
Insertion Loss of Pass-Thru Path.....	41
1 dB Gain Compression .....	41
V3050A General and Supplemental Information .....	42
Additional Resources .....	43

## Introduction

The N9042B Signal Analyzer sets a new level of performance for high frequency measurements. Frequency options up to 50 GHz cover the current 5G NR FR1 and FR2 bands, as well as most radar, EW, and satellite bands. Analysis bandwidth can be configured to 1 GHz; 1.5 GHz, 2 GHz, 4 GHz; and even up to 11 GHz bandwidth using an external digitizer. A completely new front end provides low-noise performance and high-dynamic range, addressing applications in Tx test, such as EVM and other modulation quality tests – while also excelling at measurements of low-level and unknown signals.

The V3050A Frequency Extender can be combined with the N9042B, to extend the maximum frequency up to 110 GHz. The V3050A features a low-noise design for outstanding sensitivity; a preselector filter-bank to eliminate image responses; fundamental mixing for high dynamic range; and a “remote head” form-factor that interfaces seamlessly to the N9042B.

The N9042B supports the X-series family of multi-touch applications, as well as the 89600 VSA software. A new CPU performs compute-intensive measurements, such as demodulation and EVM, up to 40% faster than prior analyzers.

Upgrades in both frequency and bandwidth are available.

## Data Sheet Definition and Terms

This data sheet provides preliminary performance information for Keysight N9042B Signal Analyzers and V3050A Frequency Extenders. Most performance information tagged here as “nominal” will be replaced by warranted (“hard”) specifications or typical specifications in the future.

**Specifications** describe the performance of parameters covered by the product warranty and apply to temperature ranges 20 to 30 °C, unless otherwise noted.

**95<sup>th</sup> percentile values** indicate the breadth of the population (approx.  $2\sigma$ ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

**Typical** values (typ) describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

**Nominal values (nom)** indicate expected performance or describe product performance that is useful in the application of the product but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Analyzer is used in environment that falls within allowed operating range; and has been in that environment at least 2 hours before being turned on.
- Analyzer has been turned on at least 30 minutes with AutoAlign set to Normal; or, if Auto Align is set to Off or Partial, alignments must have been run recently enough to prevent an Alert message. Note that factory default is with the AutoAlign set to Light, which (compared to Normal) allows wider temperature changes before causing Alignments to run automatically. The benefit is that Alignments interrupt less frequently. The user can change AutoAlign to Normal if desired, and this setting will persist after power cycle or PRESET. If the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user. In practice, the impact of such choices is primarily on Absolute Amplitude Accuracy.
- The term “mixer level” is used as a condition for many specifications in this document. This term is a conceptual quantity that is defined as follows: Mixer Level (dBm) = RF Input Power Level (dBm) - (Mechanical Attenuation) (dB) - (Electronic Attenuation) (dB).
- The term “attenuation” is used for many specifications in this document; this refers to the Mechanical Attenuator, unless otherwise stated.

Common abbreviations	
BW	bandwidth
FBP	full bypass path
FFT	fast Fourier transform
IQ	in-phase quadrature-phase (sample data)
IVL	Individual validated license (for export to restricted countries)
LNA	low-noise amplifier
LNP	low-noise path
LO	local oscillator
PA	pre-amplifier
MPB	microwave preselector bypass
RBW	resolution bandwidth (filter)
VBW	video bandwidth (filter)

## Frequency and Time Specifications

Frequency option	
526	2 Hz to 26.5 GHz
544	2 Hz to 44 GHz
550	2 Hz to 50 GHz
Minimum Frequency	
Preamp	DC Coupled
Off	2 Hz
On	9 kHz
Frequency reference	
Accuracy (total)	$\pm [(\text{Initial accuracy}) + (\text{aging rate} \times \text{time since last adjustment}) + (\text{temperature stability})]$
Initial calibration accuracy (immediately following calibration)	$\pm 3.1 \times 10^{-8}$
Aging rate	$\pm 3 \times 10^{-8}$ / year
Temperature stability	$\pm 4.5 \times 10^{-9}$ over full temperature range
Residual FM	
Center frequency = 1 GHz, 10 Hz RBW, 10 Hz VBW	$\leq (0.25 \text{ Hz} \times N)$ p-p in 20 ms nominal (N = LO multiple, see band table below)
Frequency readout accuracy (start, stop, center, marker) (nom)	
$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.10 \% \times \text{span} + 5 \% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution}^1)$	
Marker frequency counter (nom)	
Accuracy	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.100 \text{ Hz})$
Delta counter accuracy	$\pm (\text{delta frequency} \times \text{frequency reference accuracy} + 0.141 \text{ Hz})$
Counter resolution	0.001 Hz
Frequency span (FFT and swept mode)	
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument
Resolution	2 Hz
Accuracy (nom)	
Stepped/Swept	$\pm (0.1 \% \times \text{span} + \text{horizontal resolution}^1)$
FFT	$\pm (0.1 \% \times \text{span} + \text{horizontal resolution}^1)$
Sweep (trace) point range	
All spans	3 to 100,001

1. Horizontal resolution is  $\text{Span}/(\text{SweepPoints} - 1)$ .

## Phase Noise (SSB)

Phase noise	Offset	Specification
Noise sidebands (20 to 30 °C, CF = 1 GHz)	10 Hz Wide Ref Loop BW	-93 (nom)
	10 Hz Narrow Ref Loop BW	-88 (nom)
	100 Hz	-107 dBc/Hz (nom)
	1 kHz	-124 dBc/Hz (nom)
	10 kHz	-134 dBc/Hz (nom)
	100 kHz	-139 dBc/Hz (nom)
	1 MHz	-145 dBc/Hz (nom)
	10 MHz	-155 dBc/Hz (nom)

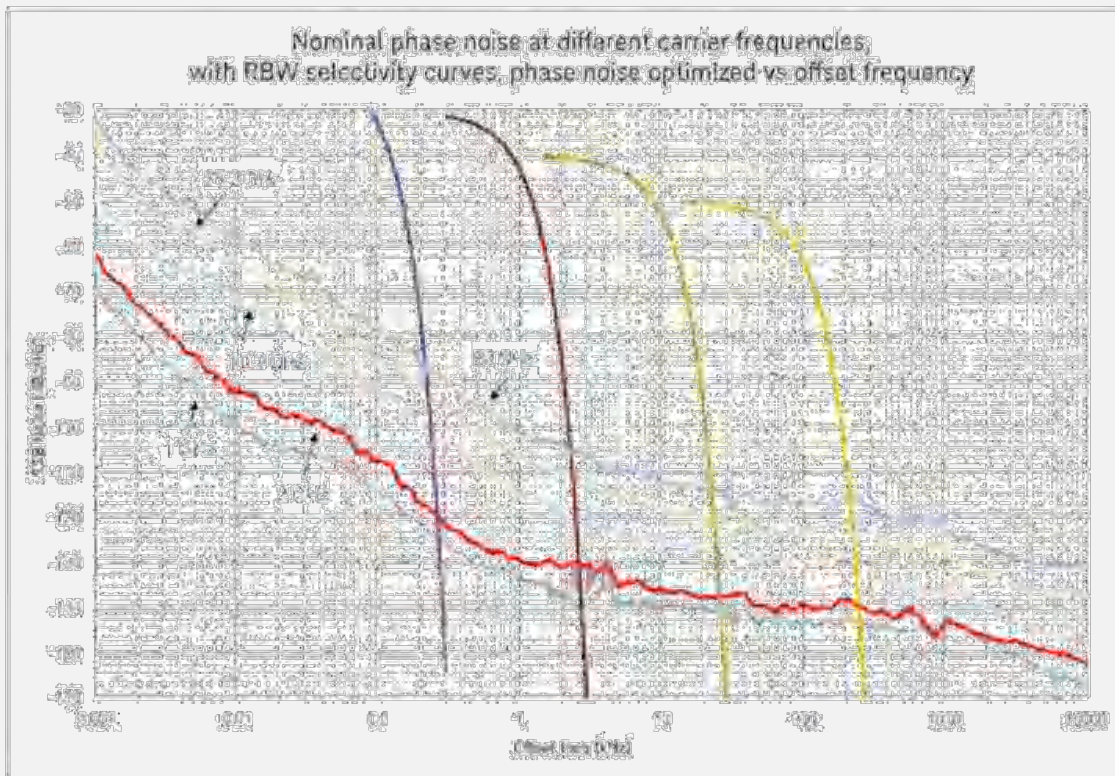


Figure 1. Nominal UXA phase noise at various center frequencies. 50 GHz curve is the predicted phase noise computed from the 25.2 GHz observation. RBW curves added to show impact of analyzer phase noise in resolving two closely spaced signals for various RBW filter choices. Per 6/10/21 spec summit, request to add 100 MHz center frequency to this chart. Wing Mar creates the chart, but Khairul works with Wing on the development of the chart.

## Triggers and Gating

Triggers are methods to begin acquisition at desired point in time. See trigger types below for overview, with “Y” to indicate each trigger is available for “swept SA”, as a gate source for gated SA, or wide-bandwidth IQ measurements. Note that specific applications can make triggers unavailable, modify their behavior, or add triggers not listed here.

Trigger/Gate sources				
	Swept trigger	Gate source	Wide bandwidth IQ trigger	Supplemental information
Free Run	Y		Y	
External 1	Y	Y	Y	Jitter up to ~33 ns p-p (nom)
External 2	Y	Y	Y	
External 3			Y	Jitter < 20 ps (nom)
RF Burst	Y	Y		
Video (IF Mag)	Y		Y <sup>1</sup>	
ADC			Y	Similar to Video, but operates digitally on mag[I,Q], prior to decimation, filtering, and corrections.
Line	Y	Y		
Periodic	Y	Y	Y	Repetitive “frame” trigger, at precise interval, following an External or RF Burst trigger
TV	Y	Y		

1. In 255 MHz IF Path only; at greater bandwidths, ADC trigger is similar.

Triggers		
Video (independent of Display Scaling and Reference Level)	Specifications	Supplemental information
Minimum settable level	-170 dBm	Useful range limited by noise
Maximum usable level		Highest allowed mixer level <sup>1</sup> + 2 dB (nominal)
Detector and Sweep Type relationships		
Sweep Type = Swept		
Detector = Normal, Peak, Sample or Negative Peak		Triggers on the signal before detection, which is similar to the displayed signal
Detector = Average		Triggers on the signal before detection, but with a single-pole filter added to give similar smoothing to that of the average detector
Sweep Type = FFT		Triggers on the signal envelope in a bandwidth wider than the FFT width
RF Burst	Specifications	Supplemental information
Level range	-40 to -10 dBm plus attenuation (nominal) <sup>2</sup>	
Level Accuracy <sup>3</sup>		
Absolute	± 2 dB + Absolute Amplitude Accuracy (nominal)	
Relative	± 2 dB (nominal)	
Bandwidth (-10 dB)		
Most cases <sup>4</sup>	> 80 MHz (nominal)	
Start Freq < 300 MHz, RF Burst Level Type = Absolute		
Sweep Type = Swept	16 MHz (nominal)	
Sweep Type = FFT		
FFT Width > 25 MHz	> 80 MHz (nominal)	
FFT Width 8 to 25 MHz	30 MHz (nominal)	
FFT Width < 8 MHz	16 MHz (nominal)	
Frequency Limitations		If the start or center frequency is too close to zero, LO feedthrough can degrade or prevent triggering. How close is too close depends on the bandwidth listed above.
Amplitude Requirements		-65 dBm minimum video carrier power at the input mixer, nominal

1. The highest allowed mixer level depends on the IF Gain. It is nominally -10 dBm for Preamp Off and IF Gain = Low.
2. Noise will limit trigger level range at high frequencies, such as above 15 GHz.
3. With positive slope trigger. Trigger level with negative slope is nominally 1 to 4 dB lower than positive slope.
4. Include RF Burst Level Type = Relative.



Sweep time and triggering		
Range	Span = 0 Hz	1 $\mu$ s to 6000 s
	Span $\geq$ 10 Hz	1 ms to 4000 s
Accuracy	Span $\geq$ 10 Hz, swept	$\pm$ 0.01% nominal
	Span $\geq$ 10 Hz, FFT	$\pm$ 40% nominal
	Span = 0 Hz	$\pm$ 0.01% nominal
Trigger Delay	Span = 0 Hz or FFT	-150 to +500 ms
	Span $\geq$ 10 Hz, swept	0 to 500 ms
	Resolution	0.1 $\mu$ s
Time gating		
Gate methods	Gated LO; gated video; gated FFT	
Gate length range (except method = FFT)	1 $\mu$ s to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p nominal	

## Swept Spectrum Analysis

These bands apply to swept spectrum analysis and are not applicable to wide-bandwidth IQ analysis.

Swept frequency band	LO multiple (N)	Frequency range	
0	1	2 Hz to 3.6 GHz	
1	1	3.5 to 8.4 GHz	
2	2	8.3 to 13.6 GHz	
3	2	13.5 to 17.1 GHz	
4	4	17.0 to 26.5 GHz	
5	4	26.4 to 34.5 GHz	
6	8	34.4 to 50 GHz	
Resolution bandwidth (RBW) filters (see also Wide Bandwidth IQ Analysis section)			
Range (with -3 dB bandwidth, standard)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz		
Bandwidth accuracy (-3 dB)	1 Hz to 1.3 MHz	$\pm$ 2% (nominal)	
Selectivity (-60 dB/-3 dB)	4.1: 1 (nominal)		
EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz		
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz		
Video bandwidth (VBW) filters			
Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)		
Accuracy	$\pm$ 6%, nominal		
Detector types			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average, quasi-eak, EMI average			

## Amplitude Accuracy

Amplitude characteristics vary by user-selectable front-end path. Swept SA measurements are normally made with preselector on (in circuit). These settings impact amplitude accuracy and range.

Front end settings			
1a	Standard path	Preselector	Default selection following power-on, boot-up, or PRESET. Settings provide best dynamic range and lowest internally-generated distortion. Suitable for harmonics, IMD, spurious in presence of large signals, etc. unless noise-limited.
1b		Preselector, LNA on	Requires P26, P44, P4L, P50, or P5L. Settings provide lower DANL, compared to 1a, while preserving very good dynamic range. Suitable for distortion measurements (harmonics, IMD, etc.) when a lower noise floor is needed. Operates down to 10-20 MHz
1c		Preselector, PA on	Requires P26, P44, P4L, P50, or P5L. Settings provide lower DANL, compared to 1b. Allows tuning down to 100 kHz.
1d		Preselector, LNA on, PA on	Requires P26, P44, P4L, P50, or P5L. Settings provide lowest possible DANL, compared to 1c. Best for finding low-level spurs, oscillations, etc. near the noise floor. Allows use of wider RBW setting to achieve equivalent noise floors, so can make spur searching faster.
2a	Low-noise path (LNP)	Preselector, LNP	Settings provide the lowest distortion and best dynamic range, yet with lower DANL at higher frequencies, when compared with 1a. Path not active below 3.6 GHz.
2b		Preselector, LNP, LNA on	Settings provide the lower DANL, compared to 2a, while preserving very good dynamic range. Path not active at below 3.6 GHz.
3a	Microwave Preselector Bypass path (MPB)	MPB	Settings provide very good EVM floor at mid-high input power region (using attenuation), including below 3.6 GHz. Good for wideband digitizer and FFT measurements. Recommend using path 4a if above 3.6 GHz.
3b		LNA on	Settings provide best EVM at low input power for below 3.6 GHz. Good for wideband digitizer and FFT measurements. Otherwise use path 4b if above 3.6 GHz.
3c		PA on	Requires P26, P44, P4L, P50, or P5L. Good for wideband digitizer and FFT measurements. Settings allowed only for very low power levels since preselector is bypassed.
3d		LNA on, PA on	Requires P26, P44, P4L, P50, or P5L. Good for wideband digitizer and FFT measurements. Settings provide best EVM at very low power, including below 3.6 GHz
4a	Full Bypass path (FBP)	LNP, MPB	Settings provide best EVM floor for mid-high input power region (using attenuation) for above 3.6 GHz. Best for wideband digitizer and FFT measurements. Otherwise use path 3a if below 3.6 GHz.
4b		LNP, MPB, LNA on	Settings provide best EVM floor for low input power region (using attenuation) for above 3.6 GHz. Best for wideband digitizer and FFT measurements. Otherwise use path 3b if below 3.6 GHz.

Absolute amplitude accuracy				
(10 dB attenuation, RBW < = 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any Reference Level, any vertical Scale)				
at 50 MHz	± 0.12 dB (nom)			
at any frequency, any path, any LNA or PA setting	± (0.12 dB + Frequency Response) (nom)			
EA3	± 0.12 dB (nom) (10 dB attenuation, RBW < = 1 MHz, input signal -7 to -25 dBm, all settings auto-coupled except Auto Swp Time = Accy, any Reference Level, any vertical Scale)			
Frequency response				
Standard path (10 dB attenuation, relative to reference conditions (50 MHz), preselector centering applied > 3.6 GHz), 20 to 30 °C				
Frequency	1a. Std	1b. Std, LNA on	1c. Std, PA on	1d. Std, LNA on, PA on
50 MHz to 3.6 GHz	± 0.52 dB ± 0.22 dB (typ)	± 0.54 dB ± 0.24 dB (typ)	± 0.50 dB ± 0.20 dB (typ)	n/a
> 3.6 to 5.2 GHz	± 1.90 dB ± 1.00 dB (typ)	± 2.28 dB ± 1.24 dB (typ)	± 2.30 dB ± 1.20 dB (typ)	± 0.75 dB (nom)
> 5.2 GHz to 8.4 GHz	± 1.40 dB ± 0.60 dB (typ)	± 2.06 dB ± 1.02 dB (typ)	± 1.64 dB ± 0.66 dB (typ)	± 0.75 dB (nom)
> 8.4 to 13.6 GHz	± 1.50 dB ± 0.52 dB (typ)	± 2.02 dB ± 1.04 dB (typ)	± 1.80 dB ± 0.58 dB (typ)	± 0.75 dB (nom)
> 13.6 to 17.1 GHz	± 1.70 dB ± 0.68 dB (typ)	± 2.16 dB ± 0.92 dB (typ)	± 2.00 dB ± 0.70 dB (typ)	± 0.75 dB (nom)
> 17.1 to 26.5 GHz	± 1.90 dB ± 0.76 dB (typ)	± 2.40 dB ± 1.10 dB (typ)	± 2.20 dB ± 0.74 dB (typ)	± 0.75 dB (nom)
> 26.5 to 34.5 GHz	± 2.30 dB ± 0.98 dB (typ)	± 2.60 dB ± 1.30 dB (typ)	± 2.44 dB ± 1.00 dB (typ)	± 0.80 dB (nom)
> 34.5 to 50 GHz	± 3.10 dB ± 1.26 dB (typ)	± 4.40 dB ± 2.38 dB (typ)	± 4.00 dB ± 1.82 dB (typ)	± 1.10 dB (nom)

Frequency response		
Low-noise path (10 dB attenuation, relative to reference conditions (50 MHz), preselector centered)		
Frequency	2a. LNP (nom)	2b. LNP, LNA on (nom)
< 3.6 GHz	(if tuning to < 3.6 GHz, then actually using Standard Path)	(if tuning to < 3.6 GHz, then actually using Standard Path with LNA on)
3.6 to 8.4 GHz	± 0.60 dB	± 0.80 dB
> 8.4 to 13.6 GHz	± 0.50 dB	± 0.70 dB
> 13.6 to 17.1 GHz	± 0.50 dB	± 0.70 dB
> 17.1 to 26.5 GHz	± 0.50 dB	± 0.70 dB
> 26.5 to 34.5 GHz	± 0.60 dB	± 1.0 dB
> 34.5 to 50 GHz	± 0.80 dB	± 1.4 dB

Frequency response	
Electronic attenuator path (EA3) (10 dB mechanical attenuation, relative to reference conditions (50 MHz))	
Frequency	
≤ 50 MHz	± 0.30 dB (nom)
> 50 MHz to 3.6 GHz	± 0.30 dB (nom)

Attenuator switching uncertainty (relative to 10 dB, LNA off, PA off; excludes 0 dB setting)	
50 MHz	± 0.05 dB (nom), EA3 ± 0.06 dB (nom)
< 8.4 GHz	± 0.5 dB (nom)
8.4 to 26.5 GHz	± 0.7 dB (nom)
> 26.5 to 50 GHz	± 1.0 dB (nom)

VSWR (voltage standing wave ratio) at RF Input (95 <sup>th</sup> percentile)	
1a Std, (10 dB input attenuation)	
10 MHz to 12 GHz	1.2
> 12 GHz to 22 GHz	1.3
> 22 to 28 GHz	1.4
> 28 to 43 GHz	1.5
> 43 to 50 GHz	1.6

RBW switching uncertainty (reference to 30 kHz RBW), 20 to 30 °C	
1 Hz to 1.5 MHz RBW	< ± 0.03 dB (nom)
1.6 MHz to 2.7 MHz RBW	< ± 0.05 dB (nom)
3 MHz RBW	± 0.1 dB (nom)
4, 5, 6, 8 MHz RBW	± 0.3 dB (nom)
Display scale switching uncertainty	
Switching between linear and log	0 dB <sup>1</sup>
Log scale/div switching	0 dB <sup>1</sup>
Display scale fidelity, 20 to 30 °C	
Between -10 and -18 dBm input mixer level	± 0.04 dB (nom)
Below -18 dBm input mixer level	± 0.02 dB (nom)

1. Only affects the display, not the measurement, so it causes no additional error in measurement results from trace data or markers.

## Amplitude Range

Describes factors which impact amplitude range over which a measurement can be made; at low levels, noise (DANL) and spurious responses; at high levels, distortion.

Maximum safe input level (max applied to RF input connector)		
RF power, max	+30 dBm (1 W) max	Damage level; includes LNA on and PA on conditions
	+20 dBm max in full bypass path	
DC Bias at RF Input	0 VDC max (DC coupled)	Use external DC block as needed
	0.2 VDC max in full bypass path	
Amplitude range		
Measurement range	DANL to +30 dBm, LNA off, PA off	
Input attenuator		
Mechanical (2 Hz to 50 GHz)	0 to 70 dB in 2 dB steps	
Electronic (2 Hz to 3.6 GHz)	0 to 24 dB in 1 dB steps	
Full attenuation range	0 to 94 dB, 1 dB steps	(Mechanical + Electronic)
Preamplifiers (2 stages: Low-Noise Amplifier LNA, Pre-Amplifier PA)		
	Low-Noise Amplifier (LNA)	Pre-Amplifier (PA)
Option P26	20 MHz to 26.5 GHz	9 kHz to 26.5 GHz
Option P44, P4L	20 MHz to 44 GHz	9 kHz to 44 GHz
Option P50, P5L	20 MHz to 50 GHz	9 kHz to 50 GHz
Noise figure	4 to 8 dB (nom) (see DANL)	10 dB (nom)
Gain	20 dB (nom)	30 dB (nom)

## DANL (Displayed Average Noise Level)

DANL defined as average indicated power, using RMS detection, with input terminated in 50 Ohm, and Attenuation set to 0 dB; normalized to a 1 Hz bandwidth, 20 to 30 °C.

1a. Standard path DANL (swept, preselector on, LNA off, PA off)		
Noise Floor Extension (Option NF2) improves DANL by 8 to 11 dB, for standard path.		
Frequency	DANL, 20 to 30 °C	Typical, unless otherwise stated
2 to 10 Hz	-	-90 dBm (nom)
> 10 to 100 Hz	-	-115 dBm (nom)
> 100 Hz to 1 kHz	-	-130 dBm (nom)
> 1 to 9 kHz	-	-137 dBm (nom)
> 9 to 100 kHz	-140 dBm	-146 dBm
> 100 kHz to 1 MHz	-152 dBm	-155 dBm
> 1 to 10 MHz	-153 dBm	-156 dBm
> 10 MHz to 1.2 GHz	-152 dBm	-156 dBm
> 1.2 to 2.1 GHz	-150 dBm	-154 dBm
> 2.1 to 3.0 GHz	-148 dBm	-152 dBm
> 3.0 to 3.6 GHz	-148 dBm	-152 dBm
> 3.6 to 6.6 GHz	-146 dBm	-150 dBm
> 6.6 to 8.4 GHz	-146 dBm	-151 dBm
> 8.4 to 13.6 GHz	-146 dBm	-150 dBm
> 13.6 to 17 GHz	-145 dBm	-149 dBm
> 17.0 to 22.5 GHz	-141 dBm	-146 dBm
> 22.5 to 26.5 GHz	-138 dBm	-143 dBm
> 26.5 to 30 GHz	-136 dBm	-141 dBm
> 30 to 34 GHz	-134 dBm	-139 dBm
> 34 to 37 GHz	-129 dBm	-135 dBm
> 37 to 40 GHz	-127 dBm	-133 dBm
> 40 to 45 GHz	-127 dBm	-132 dBm
> 45 to 50 GHz	-122 dBm	-129 dBm

**1b. Standard path, LNA on DANL (swept, preselector on, LNA on, PA off)**

Noise Floor Extension (Option NF2) improves DANL by 9 to 10 dB, for standard path, LNA on

Frequency	DANL, 20 to 30 °C	Typical
> 10 to 40 MHz	-153 dBm	-158 dBm
> 40 to 500 MHz	-163 dBm	-166 dBm
> 500 MHz to 2.5 GHz	-164 dBm	-168 dBm
> 2.5 to 3.6 GHz	-163 dBm	-167 dBm
> 3.6 to 4.7 GHz	-162 dBm	-166 dBm
> 4.7 to 17 GHz	-161 dBm	-165 dBm
> 17 to 22 GHz	-157 dBm	-162 dBm
> 22 to 26.5 GHz	-154 dBm	-159 dBm
> 26.5 to 27 GHz	-154 dBm	-158 dBm
> 27 to 34.5 GHz	-149 dBm	-154 dBm
> 34.5 to 42.5 GHz	-141 dBm	-148 dBm
> 42.5 to 47 GHz	-138 dBm	-144 dBm
> 47 to 50 GHz	-134 dBm	-141 dBm

**1c. Standard path, PA on DANL (swept, preselector on, LNA off, PA on)**

Noise Floor Extension (Option NF2) improves DANL by 7 to 9 dB, for standard path, PA on.

Frequency	DANL, 20 to 30 °C	Typical
>100 to 200 kHz	-156 dBm	-160 dBm
> 200 to 500 kHz	-158 dBm	-162 dBm
> 500 kHz to 1 MHz	-161 dBm	-165 dBm
> 1 MHz to 2.1 GHz	-163 dBm	-166 dBm
> 2.1 to 3.6 GHz	-161 dBm	-164 dBm
> 3.6 to 17 GHz	-162 dBm	-166 dBm
> 17 to 20 GHz	-162 dBm	-165 dBm
> 20 to 26.5 GHz	-160 dBm	-163 dBm
> 26.5 to 30 GHz	-158 dBm	-162 dBm
> 30 to 34 GHz	-157 dBm	-161 dBm
> 34 to 37 GHz	-155 dBm	-159 dBm
> 37 to 41 GHz	-153 dBm	-158 dBm
> 41 to 46 GHz	-150 dBm	-155 dBm
> 46 to 50 GHz	-148 dBm	-153 dBm

1d. Standard path, LNA on, PA on DANL (swept, preselector on, LNA on, PA on)	
Noise Floor Extension (Option NF2) improves DANL by 9 to 10 dB, for standard path, LNA on, PA on.	
Frequency	DANL (nom)
< 10 MHz	Not permitted with LNA on
> 10 to 40 MHz	-158 dBm <sup>1</sup>
> 40 to 500 MHz	-166 dBm <sup>1</sup>
> 500 MHz to 2.5 GHz	-168 dBm <sup>1</sup>
> 2.5 to 3.6 GHz	-167 dBm <sup>1</sup>
> 3.6 to 8.4 GHz	-168 dBm
> 8.4 to 13.5 GHz	-169 dBm
> 13.5 to 17.1 GHz	-168 dBm
> 17.1 to 23 GHz	-167 dBm
> 23 to 27 GHz	-166 dBm
> 27 to 36.5 GHz	-164 dBm
> 36.5 to 43.5 GHz	-162 dBm
> 43.5 to 47 GHz	-160 dBm <sup>2</sup>
> 47 to 50 GHz	-159 dBm <sup>2</sup>

1. In the range 10 MHz to 3.6 GHz, when both LNA and PA are set to on, only the LNA is actually in circuit. Therefore, DANL is similar to 1b in this frequency range.
2. Option P5L and P4L are variants of Option P50 and P44. P50, P44, P5L and P4L provide use of both LNA and PreAmp (PA) to 50 GHz. However, only P50 and P44 allow use of LNA and PA *together* (simultaneously) to 50 GHz; while P5L actually by-passes the PA (uses LNA only) in the tuning range > 43.5 to 50 GHz. See DANL for path 1b for LNA-only DANL in this range. Likewise, P44 and P4L to 44 GHz.

2a. Low-noise path (low-noise path enable, preselector on, LNA off, PA off)	
Noise Floor Extension (Option NF2) improves DANL by 9 to 11 dB, for low-noise path.	
Frequency	DANL (nom)
< 3.6 GHz	Not permitted with low noise path
3.6 to 17.1 GHz	-154 dBm
> 17.1 to 23 GHz	-152 dBm
> 23 to 26.5 GHz	-149 dBm
> 26.5 to 29 GHz	-148 dBm
> 29 to 34.5 GHz	-146 dBm
> 34.5 to 45 GHz	-142 dBm
> 45 to 50 GHz	-138 dBm

It is possible, but not common, to make swept SA measurements with preselector by-passed. The impact to DANL and TOI is estimated here, relative to comparable paths with preselector.

- DANL for MPB is ~6 dB better than Standard (1a in table on page 15).
- DANL for MPB, PA on is ~3 dB worse than Standard, PA on (1c in table on page 16).



## TOI

Third-Order Intercept (TOI) is a figure of merit for the 3rd-order intermodulation distortion in the RF front end.

1a. Standard path (swept, preselector on, LNA off, PA off)	
State following power-on, boot-up, or PRESET.	
Frequency	TOI (nom)
10 to 350 MHz	+18 dBm
> 350 MHz to 2.2 GHz	+20 dBm
> 2.2 Gz to 2.8 GHz	+19 dBm
> 2.8 GHz to 3.0 GHz	+20 dBm
> 3.0 to 3.6 GHz	+22 dBm
> 3.6 to 8.4 GHz	+19 dBm
> 8.4 to 13.6 GHz	+22 dBm
> 13.6 to 21 GHz	+15 dBm
> 21 to 26.5 GHz	+22 dBm
> 26.4 to 34.5 GHz	+20 dBm
> 34.5 to 50 GHz	+17 dBm
1b. Standard path, (swept, preselector on, LNA on, PA off)	
Frequency	TOI (nom)
10 to 500 MHz	-2 dBm
> 500 MHz to 2 GHz	0 dBm
> 2 to 3.6 GHz	+3 dBm
> 3.6 to 13.6 GHz	0 dBm
> 13.6 to 21 GHz	-4 dBm
> 21 to 26.5 GHz	+2 dBm
> 26.5 to 34 GHz	+3 dBm
> 34 to 50 GHz	-3 dBm
1c. Standard path (swept, preselector on, LNA off, PA on)	
Frequency	TOI (nom)
10 to 400 MHz	0 dBm
> 400 to 800 MHz	+1 dBm
> 800 MHz to 3 GHz	+2 dBm
> 3 to 3.6 GHz	+3 dBm

## SHI

Second-Harmonic Intercept (SHI) is a figure of merit for analyzer distortion at the 2<sup>nd</sup> harmonic of input signal. Frequency refers to the fundamental signal and extends to ½ the maximum measurable frequency; the 2<sup>nd</sup> harmonic is at 2\*{Freq}.

1a. Standard path: SHI (swept, preselector on, LNA off, PA off)	
Frequency of the fundamental	SHI (nom)
10 MHz to 1.8 GHz	+47 dBm
> 1.8 to 3 GHz	+62 dBm
> 3 to 6.5 GHz	+66 dBm
> 6.5 to 10 GHz	+72 dBm
> 10 to 13.5 GHz	+67 dBm
> 13.5 to 25 GHz	+60 dBm
1b. Standard path: SHI (swept, preselector on, LNA on, PA off)	
Frequency of the fundamental	SHI (nom)
10 MHz to 1.8 GHz	+12 dBm
> 1.8 to 13.5 GHz	+15 dBm
1c. Standard path: SHI (swept, preselector on, LNA off, PA on)	
Frequency of the fundamental	SHI (nom)
10 MHz to 1.8 GHz	+28 dBm
> 1.8 to 13.5 GHz	+5 dBm
2a. Low-noise path: SHI (swept, Low-noise path enable, preselector on, LNA off, PA off)	
Frequency of the fundamental	SHI (nom)
1.75 to 2.5 GHz	+87 dBm
> 2.5 to < 5 GHz	+92 dBm
5 to 13.5 GHz	+96 dBm
> 13.5 to 25 GHz	+85 dBm

## Gain Compression

Standard path: 1 dB gain compression (swept, standard, preselector on, LNA off)		
Frequency	Gain Comp (nom)	Gain Comp (nom)
	PA Off (1a)	PA On (1c)
20 to 40 MHz	+2 dBm	-14 dBm
40 MHz to ,3.6 GHz	+5 dBm	-14 dBm
3.6 to 13.5 GHz	+8 dBm	--
13.5 to 26.5 GHz	+3 dBm	--

## Residuals, Images, and Spurious Responses

Residual responses (input terminated, 0 dB attenuation)			
200 kHz to 8.4 GHz (swept)	-100 dBm (nom)		
Zero span or FFT or other frequencies	-100 dBm (nom)		
Image responses	Tuned freq (f)	Excitation freq	Response
Mixer level at -10 dBm	10 MHz to 26.5 GHz	f+45 MHz	-80 dBc (nom)
	10 MHz to 3.6 GHz	f+10,245 MHz	-80 dBc (nom)
	10 MHz to 3.6 GHz	f+645 MHz	-80 dBc (nom)
	> 3.6 to 13.6 GHz	f+645 MHz	-80 dBc (nom)
	> 13.6 to 17.1 GHz	f+645 MHz	-80 dBc (nom)
	> 17.1 to 22 GHz	f+645 MHz	-80 dBc (nom)
	> 22 to 26.5 GHz	f+645 MHz	-70 dBc (nom)
Mixer level at -30 dBm	> 26.5 to 50 GHz	f+45 MHz	-90 dBc (nom)
	> 26.5 to 34.5 GHz	f+645 MHz	-70 dBc (nom)
	> 34.5 to 42 GHz	f+645 MHz	-60 dBc (nom)
	> 42 GHz to 50 GHz	f+645 MHz	-75 dBc (nom)
Other spurious responses (input-related, standard path, LNA off, PA off)	Mixer level	Response	
Carrier frequency $\leq 26.5$ Hz			
First RF order			
f $\geq 10$ MHz from carrier	-10 dBm	-80 dBc + 20log(N) including IF feedthrough, LO harmonic mixing responses (nom)	
Higher order			
f $\geq 10$ MHz from carrier	-40 dBm	-80 dBc + 20log(N) including higher order mixer responses (nom)	
Carrier frequency $> 26.5$ Hz			
f $\geq 10$ MHz from carrier	-30 dBm	-90 dBc (nom)	
LO-related spurious responses	-10 dBm	-68 dBc + 20log(N) (nom)	
		Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.	
200 Hz $\leq$ f < 10 MHz from carrier Line-related spurious responses		-73 dBc + 20log(N) (nom)	
		Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.	

Note: N is the LO multiplication factor. Refer to earlier table for the N value versus frequency ranges.

Performance is nominally the same, with PA on, and in low-noise path (LNP).

## Wide-Bandwidth IQ Analysis (Demod)

Several wide-bandwidth IF paths and digitizers are available to acquire IQ data, with LO tuning fixed (not swept), typically to characterize the modulation quality of intentional transmitters (e.g. EVM).

All specifications based on preselector by-passed (RF Path either Microwave Preselector Bypass or Full Bypass) (except < 3.6 GHz), unless otherwise noted.

Bandwidth			
Bandwidth option <sup>1</sup>	IF path name	Analysis bandwidth or span range, max	Comments
Standard	10 MHz	10 MHz	
Standard	25 MHz	25 MHz	Licensed as B25
Standard	40 MHz	40 MHz	Licensed as B40
Standard	255 MHz	255 MHz	Licensed as B2X
R10	1.0 GHz	1.0 GHz	
R15	1.5 GHz	1.5 GHz	
R20	2.0 GHz	2.0 GHz	
R40	4.0 GHz	4.0 GHz	
	External	Up to 11.0 GHz	Requires Options EDC and CRW. Requires M8131A Digitizer.

1. IF Paths at 10, 25, 40, and 255 MHz are enabled by any of R10, R15, R20, or R40. Each bandwidth option includes and enables all others with lesser bandwidth (except External Digitizer); e.g. instruments with R20 also have R15 and R10 licenses, plus B2X, B40, and B25 paths.

## 5GNR EVM Residuals (“Floor”) vs Power (“Bathtub Curves”)

Example measurement results are demonstrations of performance (not specifications). EVM residual plots include contributions from the signal generator; the N9042B signal analyzer alone would have lower residuals (by ~3 dB, if assume equal contributions).

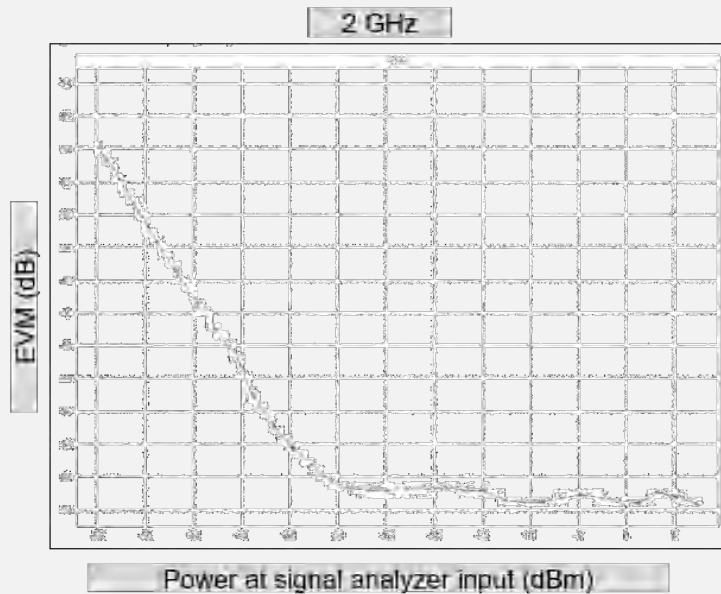


Figure 2. 5GNR FR1, 2.0 GHz carrier, 100 MHz single carrier, 256 QAM, 30 kHz SCS, DC Punc off

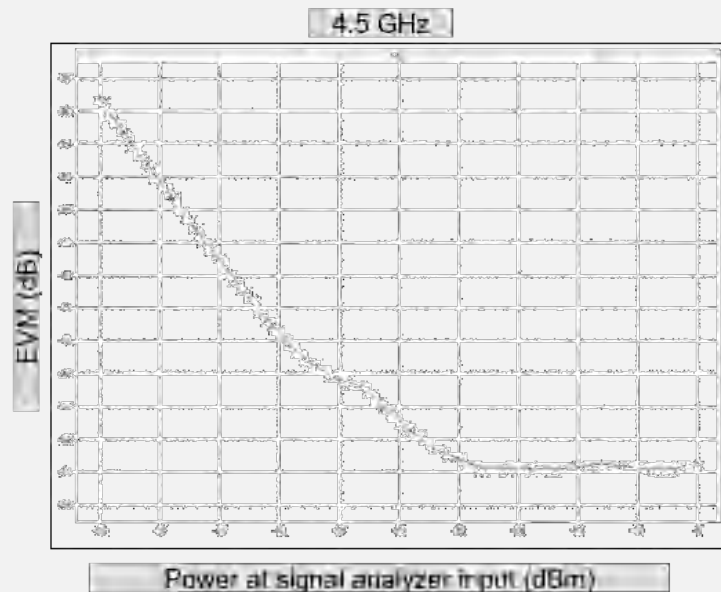


Figure 3. 5GNR FR1, 4.5 GHz carrier, 100 MHz single carrier, 256 QAM, 30 kHz SCS, DC Punc off

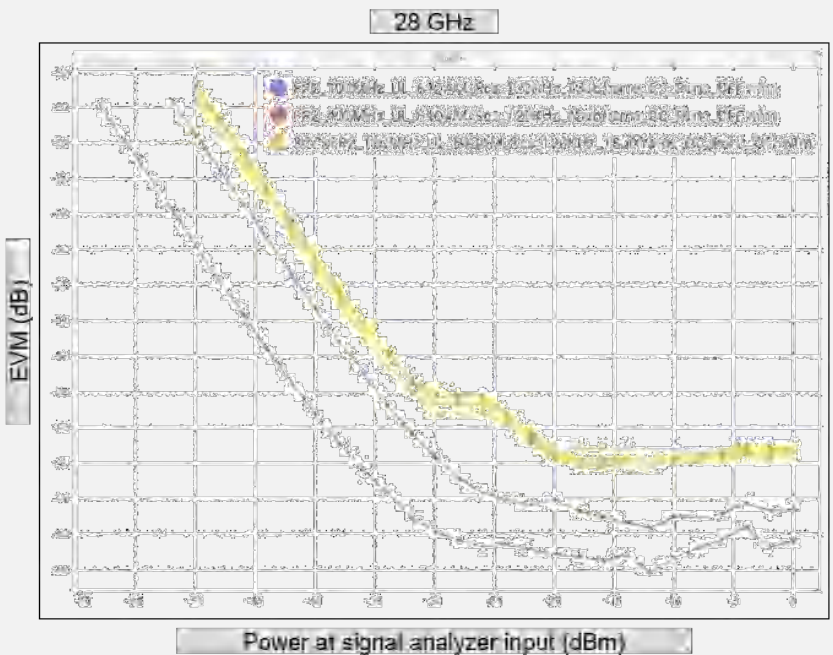


Figure 4. 5G NR FR2, 28 GHz carrier, CP-OFDM Uplink, 1x100 MHz (blue) and 1x400 MHz (red) and 8x100 MHz (yellow), 64 QAM, 120 kHz SCS

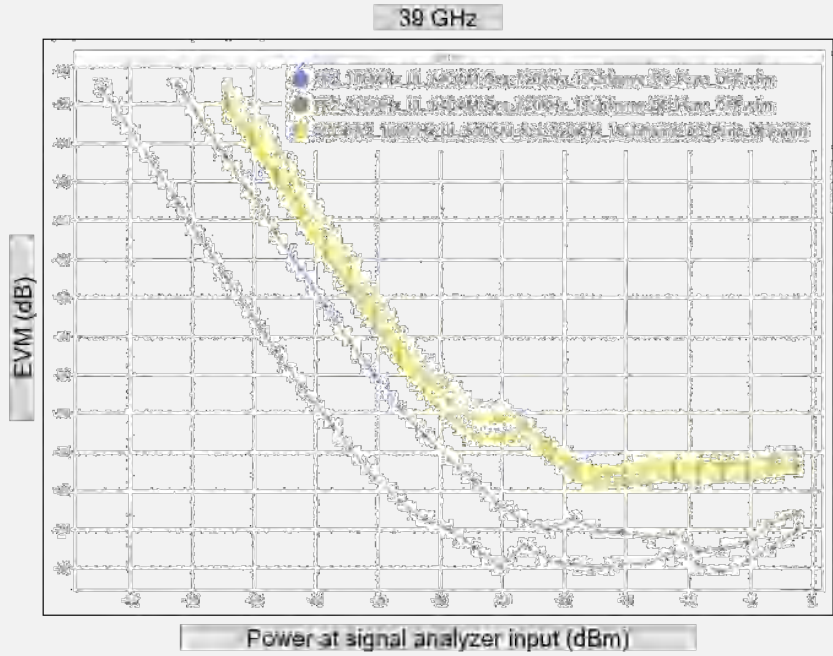


Figure 5. FR2, 39 GHz carrier, CP-OFDM Uplink, 1x100 MHz (blue) and 1x400 MHz (red) and 8x100 MHz (yellow), 64 QAM, 120 kHz SCS

## 25 MHz Analysis Bandwidth (licensed as option B25)

25 MHz analysis bandwidth (licensed as option B25)			
Analysis bandwidth range	10 Hz to 25 MHz		
Tuning range	2 Hz to 50.0 GHz	In practice, low end of tuning range limited to $< (\frac{1}{2} * BW)$ , by image folding and LO feedthrough.	
	50.0 to 110 GHz w/ V3050A	Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified	
IF frequency (center)	322.5 MHz		
IF frequency response and phase linearity, demodulation and FFT response relative to the center frequency			
Center Frequency	Preselector	IF Freq response RMS (nom)	IF phase linearity RMS (nom)
20 MHz to 50 GHz	Off	0.03 dB	0.27
Full scale (ADC clipping)			
Description		Supplemental information	
2 Hz to 50 GHz		-7 dBm mixer level (nom)	
Data acquisition			
Description	Data packing		Supplemental information
	32-bit	64-bit	
Length (IQ sample pairs)	536 MSa ( $2^{29}$ Sa)	268 MSa ( $2^{28}$ Sa)	2 GB total memory
Maximum IQ Capture Time			Calculated by: Length of IQ sample pairs/Sample Rate (IQ Pairs)
10 MHz IFBW	42.94 s	21.47 s	
25 MHz IFBW	17.17 s	8.58 s	
Sample Rate (IQ Pairs)	1.25 x IFBW		
ADC Resolution	16 bits		

## 40 MHz Analysis Bandwidth (licensed as option B40)

Specifications on this bandwidth apply with center frequencies of 30 MHz and higher.

40 MHz analysis bandwidth (licensed as option B40)			
Analysis bandwidth range	10 Hz to 40 MHz		
Tuning range	2 Hz to 50.0 GHz	In practice, low end of tuning range limited to $< (\frac{1}{2} * BW)$ , by image folding and LO feedthrough.	
	50.0 to 110 GHz w/ V3050A	Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified	
IF frequency (center)	322.5 MHz		
IF frequency response and phase linearity, demodulation and FFT response relative to the center frequency			
Center Frequency	Preselector	IF Freq response RMS (nom)	IF phase linearity RMS (nom)
30 MHz to 50 GHz	Off	0.07 dB	0.24
Full scale (ADC clipping)			
Description		Supplemental information	
2 Hz to 50 GHz		-7 dBm mixer level (nom)	
Data acquisition			
Description	Data packing		Supplemental information
	32-bit	64-bit	
Length (IQ sample pairs)	536 MSa ( $2^{29}$ Sa)	268 MSa ( $2^{28}$ Sa)	2 GB total memory
Maximum IQ Capture Time			Calculated by: Length of IQ sample pairs/Sample Rate (IQ Pairs)
10 MHz IFBW	42.94 s	21.47 s	
25 MHz IFBW	17.17 s	8.58 s	
40 MHz IFBW	10.73 s	5.36 s	
Sample Rate (IQ Pairs)	1.25 x IFBW		
ADC Resolution	12 bits		
IF dynamic range			
SFDR (spurious-free dynamic range) (ADC related spurious)	-77 dBc (nom)	Signal at -27 dBFS, anywhere in full IF width	



## 255 MHz Analysis Bandwidth (licensed as option B2X)

Specifications on this bandwidth apply with center frequencies of 400 MHz and higher.

255 MHz analysis bandwidth (licensed as option B2X)			
Analysis bandwidth range	10 Hz to 255 MHz		
Tuning range	2 Hz to 50.0 GHz	In practice, low end of tuning range limited to $< (\frac{1}{2} * BW)$ , by image folding and LO feedthrough.	
	50.0 to 110 GHz w/ V3050A	Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified	
IF frequency (center)	322.5 MHz		
IF frequency response and phase linearity, demodulation and FFT response relative to the center frequency			
Center Frequency	Preselector	IF Freq response RMS (nom)	IF phase linearity RMS (nom)
400 MHz to 50 GHz	Off	0.2 dB	0.8
Full scale (ADC clipping)			
Description		Supplemental information	
2 Hz to 50 GHz			
Data acquisition			
Description	Data packing		Supplemental information
	32-bit	64-bit	
Length (IQ sample pairs)	1073 MSa ( $2^{29}$ Sa)	536 MSa ( $2^{28}$ Sa)	4 GB total memory
Maximum IQ Capture Time			Calculated by: Length of IQ sample pairs/Sample Rate (IQ Pairs)
10 MHz IFBW	85.89 s	42.94 s	
25 MHz IFBW	34.34 s	17.17 s	
40 MHz IFBW	21.47 s	10.73 s	
240 MHz IFBW	3.57 s	1.78 s	
255 MHz IFBW	3.57 s	1.78 s	
Sample Rate (IQ Pairs)	Minimum of (1.25 x IFBW, 300 MSa/s)		
ADC Resolution	14 bits		
IF dynamic range			
SFDR (spurious-free dynamic range) (ADC related spurious)	-78 dBc (nom)	Signal at -21 dBFS, anywhere in full IF width	

## 1 GHz Analysis Bandwidth (option R10)

Specifications on this bandwidth apply with center frequencies of 700 MHz and higher.

1 GHz analysis bandwidth (option R10)		
Analysis bandwidth range	10 Hz to 1.0 GHz	
Tuning range	2 Hz to 50.0 GHz	In practice, low end of tuning range limited to $< (\frac{1}{2} * BW)$ , by image folding and LO feedthrough.
	50.0 to 110 GHz w/ V3050A	Over-range tuning to 50.5 GHz allowed, but without corrections, performance not specified
IF frequency (center)	690 MHz	
ADC sample rate	4.8 GSa/sec	
ADC resolution	14 bits	
Final data format	I & Q pairs, 32 bits ea, 64 bits/Sa	
IQ-pair sample rate	1.25*BW	
Capture memory	16 GB	
Capture time (time record length)	1660 msec at full 1.0 GHz BW	Capture time increases with each full power-of-2 decrease in BW
IF frequency response		
< 3.5 GHz	$\pm 0.75$ dB (nom)	
$\geq 3.5$ GHz	Similar to 2 GHz analysis bandwidth see section below	

IF dynamic range		
SFDR (spurious-free dynamic range) (ADC related spurious)	-65 dBc (nom)	Signal at -27 dBFS, anywhere in full IF width
Full scale (ADC clipping); preselector bypassed, LNA off, PA off) (nom) <sup>1</sup>		
	Mixer level for IF gain low	Mixer level for IF gain high
< 3.3 GHz	-6 dBm	-7 dBm
3.3 to 13.3 GHz	-6 dBm	-12 dBm
> 13.3 to 50 GHz	-7 dBm	-13 dBm
TOI (3 <sup>rd</sup> -order intermodulation distortion, in the IF; 2 tones of equal level, -27dBFS, 10 MHz tone separation; preselector bypass, IF Gain high) (nom)		
< 3.3 GHz	-74 dBc	
3.3 to 13.3 GHz	-74 dBc	
> 13.3 to 50 GHz	-69 dBc	
IF residual responses (relative to Full Scale; input terminated; IF Gain = High) (nom)		
< 13.3 GHz	-99 dBFS	
13.3 to 50 GHz	-95 dBFS	
RF residual responses (input terminated, but varies with tuning, generally LO-related) (nom)		
	-88 dBm	
Noise density in IF (characterized at center of RF band, and center of IF <sup>2</sup> ) (nom)		
Center frequency	IF gain low	IF gain high
< 3.3 GHz	-151 dBm/Hz	-151 dBm/Hz
3.3 to 8.6 GHz	-155 dBm/Hz	-155 dBm/Hz
> 8.6 to 13.3 GHz	-153 dBm/Hz	-153 dBm/Hz
> 13.3 to 24.5 GHz	-150 dBm/Hz	-150 dBm/Hz
> 24.5 to 50 GHz	-144 dBm/Hz	-144 dBm/Hz

1. Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF Input level less attenuation setting.
2. IF noise up to 5.5 dB worse to either side of IF center.

Amplitude accuracy, absolute, 1 GHz IF path (nom) Microwave preselector bypass path (10 dB attenuation)				
Frequency	3a. MPB	3b. LNA on	3c. PA on	3d. LNA on, PA on
< 3.3 GHz	± 0.8 dB	± 0.5 dB <sup>1</sup>	± 0.5 dB <sup>1</sup>	
3.3 to 8.6 GHz	± 0.6 dB	± 0.6 dB	± 0.5 dB	± 0.6 dB
> 8.6 to 13.3 GHz	± 0.8 dB	± 0.6 dB	± 0.7 dB	± 0.6 dB
> 13.3 to 24.5 GHz	± 1.0 dB	± 1.0 dB	± 1.0 dB	± 1.0 dB
> 24.5 to 50 GHz	± 1.0 dB	± 1.3 dB	± 1.2 dB	± 1.3 dB

1. Degraded by factor of ~2 in region < 600 MHz.

Amplitude accuracy, absolute, 1 GHz IF path (nom) Full bypass path (10 dB attenuation)		
Frequency	4a. FBP	4b. FBP, LNA on
3.3 to 8.6 GHz	± 0.8 dB	± 0.8 dB
> 8.6 to 13.3 GHz	± 1.0 dB	± 0.7 dB
> 13.3 to 24 GHz	± 1.0 dB	± 1.0 dB
> 24.5 to 50 GHz	± 1.0 dB	± 1.2 dB

## 1.5 GHz Analysis Bandwidth (option R15)

Specifications on this bandwidth apply with center frequencies of 900 MHz and higher.

1.5 GHz analysis bandwidth (option R15)		
Analysis bandwidth range	10 Hz to 1.5 GHz	
Tuning range	2 Hz to 50.0 GHz	In practice, low end of tuning range limited to $< (\frac{1}{2} * BW)$ , by image folding and LO feedthrough.
	50.0 to 110 GHz w/ V3050A	
IF frequency (center)	950 (Band-0) or 1200 MHz for	
ADC sample rate	4.8 GSa/sec	
ADC resolution	14 bits	
Final data format	I & Q pairs, 32 bits ea, 64 bits/Sa	
IQ-pair sample rate	1.25*BW	
Capture memory	16 GB	
Capture time (time record length)	830 msec at full 1.0 GHz BW	Capture time increases with each full power-of-2 decrease in bandwidth
IF dynamic range	Similar to 2 GHz analysis bandwidth see section below	
IF frequency response		
< 3.5 GHz	± 0.75 dB (nom)	
≥ 3.5 GHz	Similar to 2 GHz analysis bandwidth see section below	

Amplitude accuracy, absolute, 1.5 GHz IF path (nom) Microwave preselector bypass path (10 dB attenuation)				
Frequency	3a. MPB	3b. LNA on	3c. PA on	3d. LNA on, PA on
< 3.5 GHz	± 0.8 dB	± 0.6 dB <sup>1</sup>	± 0.7 dB <sup>1</sup>	
3.5 to 8.9 GHz	± 0.7 dB	± 0.6 dB	± 0.6 dB	± 0.7 dB
> 8.9 to 24 GHz	± 1.0 dB	± 1.1 dB	± 1.1 dB	± 1.1 dB
> 24 to 50 GHz	± 1.2 dB	± 1.4 dB	± 1.2 dB	± 1.3 dB

1. Degraded by factor of ~2 in region < 600 MHz.

Amplitude accuracy, absolute, 1.5 GHz IF path (nom) Full bypass path (10 dB attenuation)		
Frequency	4a. FBP	4b. FBP, LNA on
3.5 to 8.9 GHz	± 0.8 dB	± 0.8 dB
> 8.9 to 24 GHz	± 1.0 dB	± 1.1 dB
> 24 to 50 GHz	± 1.2 dB	± 1.5 dB

## 2 GHz Analysis Bandwidth (opt R20)

Assumes Microwave Preselector Bypass Path, unless otherwise stated.

2 GHz Analysis Bandwidth (option R20)		
Analysis bandwidth range	10 Hz to 2.0 GHz	
Tuning range	3.3 to 50 GHz	
	50.0 to 110 GHz with V3050A	
IF frequency (center)	1200 MHz	
ADC sample rate	4.8 GSa/sec	
ADC resolution	14 bits	
Final data format	I & Q pairs, 32 bits ea, 64 bits/Sa	
IQ-pair sample rate	1.25*bandwidth	
Capture memory	16 GB	
Capture time (time record length)	830 msec at full 2.0 GHz BW	Capture time increases with each full power-of-2 decrease in bandwidth

IF frequency response		
IF frequency response (amplitude flatness); across 2.0 GHz span; relative to amplitude at center of span; for microwave preselector bypass and full bypass paths, with LNA off or LNA on		
	Microwave preselector bypass	Full bypass
3.5 to 8.9 GHz	± 0.5 dB (nom), LNA off	± 0.4 dB (nom), LNA off <sup>1</sup>
	± 0.5 dB (nom), LNA on <sup>1,2</sup>	± 0.4 dB (nom), LNA on <sup>1,2</sup>
> 8.9 to 24 GHz	± 0.4 dB (nom), LNA off	± 0.4 dB (nom), LNA off <sup>3</sup>
	± 0.45 dB (nom), LNA on <sup>3,4</sup>	± 0.5 dB (nom), LNA on <sup>3,4</sup>
> 24 to 50 GHz	± 0.6 dB (nom), LNA off	± 0.6 dB (nom), LNA off
	± 0.6 dB (nom), LNA on <sup>5</sup>	± 0.6 dB (nom), LNA on <sup>5</sup>

1. ± 2.5 dB at 3.75 GHz ± 250 MHz.

2. ± 0.6 dB at 8.4 GHz ± 500 MHz.

3. ± 1.2 dB at 23.7 GHz ± 300 MHz.

4. ± 1.5 dB at 9.2 GHz ± 300 MHz.

5. ± 1.5 dB at 24.05 GHz ± 50 MHz.

IF dynamic range		
SFDR (spurious-free dynamic range) (ADC related spurious)	-60 dBc (nom)	Signal at -22 dBFS, anywhere in full IF width
Full scale (ADC clipping, signal at center frequency); preselector bypassed, LNA off, PA off) (nom) <sup>1</sup>		
Center frequency	Mixer level for IF gain low	Mixer level for IF gain high
< 3.5 GHz	+7 dBm	-4 dBm
3.5 to 8.9 GHz	-4 dBm	-15 dBm
> 8.9 to 24 GHz	-7 dBm	-17 dBm
> 24 to 50 GHz	-7 dBm	-13 dBm
TOI (3 <sup>rd</sup> -order intermodulation distortion, in the IF; 2 tones of equal level, -19dBFS, 10 MHz tone separation; preselector bypass, IF gain high) (nom)		
< 3.5 GHz	-83 dBc	
3.5 to 8.9 GHz	-75 dBc	
> 8.9 to 50 GHz	-69 dBc	
IF residual responses (input terminated; IF Gain = High) (nom)		
< 3.5 GHz	-97 dBFS	
3.5 to 50 GHz	-91 dBFS	
RF residual responses (input terminated, but varies with tuning, generally LO-related) (nom)		
	-88 dBm	
Noise density in IF (characterized at center of RF band, and center of IF <sup>2</sup> ) (nom)		
Center frequency	IF gain low	IF gain high
< 3.5 GHz	-151 dBm/Hz	-151 dBm/Hz
3.5 to 8.9 GHz	-153 dBm/Hz	-155 dBm/Hz
> 8.9 to 24 GHz	-152 dBm/Hz	-153 dBm/Hz
> 24 to 50 GHz	-144 dBm/Hz	-144 dBm/Hz

1. Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF Input level less attenuation setting.
2. IF noise up to 5.5 dB worse to either side of IF center.

Amplitude accuracy, absolute, 2 GHz IF path (nom) Microwave preselector bypass path (10 dB attenuation)				
Frequency	3a. MPB	3b. LNA on	3c. PA on	3d. LNA on, PA on
3.5 to 8.9 GHz	± 0.5 dB	± 0.5 dB	± 0.5 dB	± 0.5 dB
> 8.9 to 24 GHz	± 0.8 dB	± 1.0 dB	± 0.9 dB	± 0.6 dB
> 24 to 50 GHz	± 1.1 dB	± 1.2 dB	± 1.3 dB	± 1.5 dB

Amplitude accuracy, absolute, 2 GHz IF path (nom) Full bypass path (10 dB attenuation)		
Frequency	4a. FBP	4b. FBP, LNA on
3.5 to 8.9 GHz	± 0.5 dB	± 0.5 dB
> 8.9 to 24 GHz	± 0.8 dB	± 0.8 dB
> 24 to 50 GHz	± 1.1 dB	± 1.5 dB

## 4 GHz Analysis Bandwidth (opt R40)

Assumes Microwave Preselector Bypass Path, unless otherwise stated.

4 GHz Analysis Bandwidth (option R40)		
Analysis bandwidth range	40 MHz to 4.0 GHz	
Tuning range	10 to 50 GHz	
	50.0 to 108 GHz with V3050A	
IF frequency (center)	2.55 GHz	
ADC sample rate	10.2 GSa/sec	
ADC resolution	12 bits	
Final data format	I & Q pairs, 32 bits ea, 64 bits/Sa	
IQ-pair sample rate	1.2*BW	
Capture memory	16 GB	
Capture time (time record length)	429 msec at full 4.0 GHz BW	Capture time increases with each full power-of-2 decrease in bandwidth

IF frequency response		
IF frequency response (amplitude flatness); across 4.0 GHz span; relative to amplitude at center of span; for microwave preselector bypass and full bypass paths, with LNA off or LNA on		
	Microwave preselector bypass	Full bypass
10 to 22.7 GHz	± 0.5 dB (nom), LNA off	± 0.5 dB (nom), LNA off <sup>2</sup>
	± 0.5 dB (nom), LNA on <sup>1,2</sup>	± 0.5 dB (nom), LNA on <sup>1,2</sup>
> 22.7 to 47 GHz	± 0.7 dB (nom), LNA off	± 0.7 dB (nom), LNA off <sup>3</sup>
	± 0.7 dB (nom), LNA on <sup>3</sup>	± 0.7 dB (nom), LNA on <sup>3</sup>
> 47 to 50 GHz	± 1.0 dB (nom), LNA off	± 1.5 dB (nom), LNA off
	± 2.0 dB (nom), LNA on <sup>3</sup>	± 2.5 dB (nom), LNA on <sup>3</sup>

1. ± 1 dB at center frequency of 22.05 GHz ± 650 MHz.
2. ± 1 dB at center frequency of 11 GHz ± 1 GHz.
3. ± 1 dB at center frequency of 23.75 GHz ± 1 GHz.

IF dynamic range		
SFDR (spurious-free dynamic range) (ADC related spurious)	-62 dBc (nom)	Signal at -16 dBFS, anywhere in full IF width
Full scale (ADC clipping); preselector bypassed, LNA off, PA off) (nom) <sup>1</sup>		
Center frequency	Mixer level for IF gain low	Mixer level for IF gain high
10.0 to 22.7 GHz	-6 dBm	-16 dBm
> 22.7 to 50 GHz	-7 dBm	-13 dBm
TOI (3 <sup>rd</sup> -order intermodulation distortion, in the IF; 2 tones of equal level, -19 dBFS, 10 MHz tone separation; preselector bypass, IF gain high) (nom)		
10.0 to 50 GHz	-66 dBc	
IF residual responses (input terminated; IF gain high) (nom)		
10.0 to 50 GHz	-80 dBFS	There are no actual discernable/observable IF Residuals in this IF path.
RF residual responses (input terminated, but varies with tuning, generally LO-related) (nom)		
10.0 to 20.0 GHz	-75 dBm	
> 20.0 to 22.7 GHz	-60 dBm	
> 22.7 to 50 GHz	-83 dBm	
Noise density in IF (characterized at center of RF band, and center of IF <sup>2</sup> ) (nom)		
Center frequency	IF gain low	IF gain high
10.0 to 22.7 GHz	-148 dBm/Hz	-150 dBm/Hz
22.7 to 50 GHz	-142 dBm/Hz	-143 dBm/Hz

1. Full scale (ADC clipping level) is a rough estimate of the signal level at which ADC overload occurs. Actual clipping levels vary significantly; this is only a guide. Mixer level is RF Input level less attenuation setting.  
2. IF noise up to 5.5 dB worse to either side of IF center.

Amplitude accuracy, absolute, 4 GHz IF path (nom) Microwave preselector bypass path (10 dB attenuation)				
Frequency	3a. MPB	3b. LNA on	3c. PA on	3d. LNA on, PA on
10 to 22.7 GHz	± 0.5 dB	± 0.7 dB	± 0.6 dB	± 0.8 dB
> 22.7 to 50 GHz	± 1.1 dB	± 1.2 dB	± 1.3 dB	± 1.3 dB

Amplitude accuracy, absolute, 4 GHz IF path (nom) Full bypass path (10 dB attenuation)		
Frequency	4a. FBP	4b. FBP, LNA on
10 to 22.7 GHz	± 0.5 dB	± 0.8 dB
> 22.7 to 50 GHz	± 1.1 dB	± 1.3 dB



# Inputs and Outputs

## Front Panel

RF input			
Option 526, 544, 550	2.4 mm male, 50 Ω (nominal) (standard)		
	Adapter 2.4 mm to 3.5 mm included with Option 526		
External frequency extender, wide-bandwidth (option EXW), interface for use with V3050A			
High LO Out	2.4 mm female; option EXW connection to V3050A signal analyzer frequency extender		
High IF In	SMA, female; option EXW connection to V3050A signal analyzer frequency extender		
External mixing (option EXM)			
Connector	SMA, female, 50 Ω, nominal		
Functions	Triplexed for LO output, IF input, and mixer bias		
Mixer bias range	± 10 mA in 10 µA step		
IF frequency	322.5 MHz, for IF bandwidth path < = 25 MHz		
	250.0 MHz (center), for IF bandwidth path = 40 MHz		
LO output frequency range	3.75 to 14.0 GHz		
Internal calibrator output			
Cal Out	2.4 mm female, 10 MHz to 50 GHz internal calibrator output		
USB ports			
Type	Description	Connector	Output Current
Standard (2)	Compatible with USB 2.0	USB Type-A female	0.5 A (nom) for ports not marked
USB 3.0 (2)	Compatible with USB 3.0	USB Type-A female (blue)	1.2 A (nom) for ports
USB C (1)	Compatible with USB Type-C	USB Type-C female	3.0 A at 15 V
Wide IF out (enabled by option CRW)			
Connector	SMA, female, 50 Ω nominal		

## Rear Panel

10 MHz out	
Connector	BNC female, 50 Ω (nominal)
Output amplitude	≥ 0 dBm (nominal)
Frequency	10 MHz × (1+ frequency reference accuracy)
Ext ref in	
Connector	BNC female, 50 Ω (nominal)
Input amplitude range	–5 to 10 dBm (nominal)
Input frequency	1 to 50 MHz (nominal)
Frequency lock range	± 2 × 10 <sup>-6</sup> of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female, 10 kΩ (nominal)
Trigger level range	–5 to 5 V
Trigger 3 input (precision, for wide-bandwidth measurements only)	
Connector	SMA, female, 50 Ω (nominal)
Trigger level range	–5 to 5 V
Trigger 1 and 2 outputs	
Connector	BNC female, 50 Ω (nominal)
Trigger level range	0 to 5 V (CMOS) (nominal)
VGA (monitor output 1)	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1280 x 800
DisplayPort (monitor output 2)	
Connector	Mini DisplayPort
Resolution	1280 x 800
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS series noise source	For use with Keysight Technologies' SNS series noise sources
Connector	12 pin circular
Analog out	
Connector	BNC female
USB ports	
USB 3.0 (2 ports)	
Standard	Compatible with USB 3.0
Connector	USB Type-A female
Output current	1.2 A (nominal)
USB 2.0 (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)

GPIB interface	
Connector	IEEE-488 bus connector
GPIB codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIB mode	Controller or device
PCIe X4 interface	
Connector	PCIe X4, female
Digital Bus interface	
Connector	MDR-80
LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 Ethertwist
AUX IF output	
Connector	SMA female, shared by CR3, CRP and ALV
Impedance	50 $\Omega$ nominal
AUX IF output, second IF output, licensed as option CR3 (included as standard)	
SA mode	322.5 MHz center frequency
IQ analyzer with IF bandwidth $\leq$ 25 MHz	322.5 MHz center frequency
IQ analyzer with IF path 40 MHz	250 MHz center frequency
IQ analyzer with IF path 255 MHz/1 GHz	690 MHz center frequency
Conversion gain (SA mode and up to 40 MHz bandwidth)	-1 to +4 dB (nominal) plus RF frequency response
Conversion gain (with IF path 255 MHz/1 GHz)	TBD (nominal) plus RF frequency response
Bandwidth	
< 3.6 GHz	Up to 1 GHz nominal
> 3.6 GHz, with preselector	Depends on RF center frequency
> 3.6 GHz, with preselector bypass	100 - 800 MHz $\pm$ 3 dB (nominal)
AUX IF output, programmable, licensed as option CRP (included as standard); only available in swept spectrum analysis	
Range	10 to 75 MHz (user selectable)
Resolution	0.5 MHz
Conversion gain at RF center frequency with 0 dB attenuation	-1 to +4 dB (nominal) plus RF frequency response
Lower output frequencies	Subject to folding
Bandwidth	
Highpass corner frequency	5 MHz (nominal) at -3 dB
Lowpass corner frequency	120 MHz (nominal) at -3 dB
Output at 70 MHz	
< 3.6 GHz or > 3.6 GHz with preselector bypassed	100 MHz nominal
Preselected band	Depends on RF center frequency

AUX IF output, Fast Log Video, licensed as option ALV		
<b>General port specifications</b>		
Connector	SMA female	Shared with other options
Impedance	50 $\Omega$ nominal	
<b>Fast Log video output</b>		
Output voltage	Open-circuit voltages shown	
Maximum	1.6 V at $-10$ dBm nominal	
Slope	$25 \pm 1$ mV/dB nominal	
Rise Time	15 ns nominal	
Fall Time	40 ns nominal (for frequencies between 3.6-26.5 GHz, with MPB path) Other cases, depends on bandwidth.	
<b>Option YAV Y-axis video output</b>		
<b>General port specifications</b>		
Connector	BNC female	Shared with other options
Impedance	50 $\Omega$ nominal	
<b>Screen video</b>		
<b>Operating conditions</b>		
Display scale types	Log or Lin	“Lin” is linear in voltage
Log scales	All (0.1 to 20 dB/div)	
Modes	Spectrum analyzer only	
Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
Offset	$\pm 1\%$ of full scale nominal	
Gain accuracy	$\pm 1\%$ of output voltage nominal	
<b>Log video (Log envelope) output</b>		
<b>Amplitude range (terminated with 50 <math>\Omega</math>)</b>		
Maximum	1.0 V nominal for $-10$ dBm at the mixer	
Scale factor	Output changes 1 V per 192.66 dB change in the signal envelope	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
<b>Linear video (AM demod) output</b>		
<b>Amplitude range (terminated with 50 <math>\Omega</math>)</b>		
Maximum	1.0 V nominal for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	

## General Specifications

Temperature range		
Operating	0 to 40 °C	
Altitude	4,600 m (approx. 15,000 feet)	
Maximum relative humidity	95% non-condensing	
Environment		
	Indoor use	
Power requirements		
Voltage and frequency (nominal)	100/120 V, 50/60/400 Hz	The instruments can operate with mains supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage
	220/240 V, 50/60 Hz	
Rated output power	850W	
Display		
Resolution	1280 x 800	
Size	357 mm (14.1 in.) diagonal (nominal) capacitive multi-touch screen	
Data storage		
Internal	Removable solid-state drive ( $\geq 256$ GB)	
External	Supports USB 3.0/2.0 compatible memory devices	
Weight (without options)		
Net	38.6 kg (nominal)	
Shipping	53.9 kg (119 lbs) (nominal)	
Dimensions		
Height	281 mm (11 in)	
Width	459 mm (18 in)	
Length	575 mm (22.6 in)	
CPU	Modular, upgradeable; Intel i7, 6-core, 1.9 GHz clock, 8 GB DDR4 DRAM; includes secure memory for instrument cal data	
SSD (solid-state drive)	256 GB, removeable	
Operating system	Windows-10, Enterprise	
Calibration cycle		
The recommended calibration cycle is one year; calibration services are available through Keysight service centers.		

## V3050A Signal Analyzer Frequency Extender

The V3050A Frequency Extender is usable with the N9042B X-Series Signal Analyzer only and extends its frequency range. N9042B-EXW is required to enable V3050A support. Specifications apply with standard 1-meter cable supplied.

All specifications assume use of included cable bundle with use of V3050A Signal Analyzer Frequency Extender with N9042B UXA.

V3050A can be connected to N9042B in two ways.

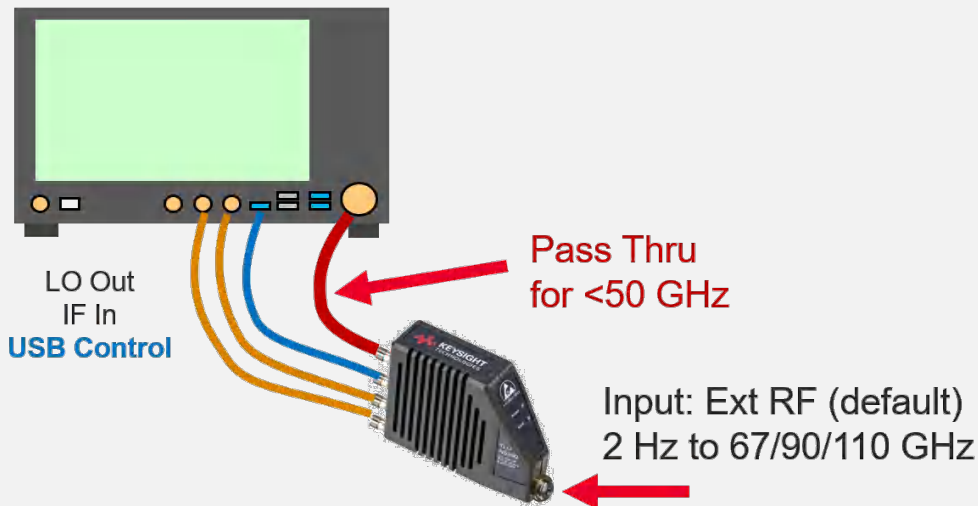


Figure 6. Configuration 1, single input.

Configuration 1 requires N9042B-550 and N9042B-EXW. Pass Thru output from V3050A is connected to N9042B RF Input. All signals to be measured are connected to a single port - the V3050A input. Frequencies < 50 GHz are routed to Pass Thru; frequencies > 50 GHz are down-converted inside V3050A and routed as an IF to the N9042B. The user can freely sweep frequency anywhere from 2 Hz up to 110 GHz, including sweeps through 50 GHz. The losses of the Pass Thru path impact performance (see Insertion Loss of Thru-Path); however, absolute amplitude readings are corrected using stored calibration factors.

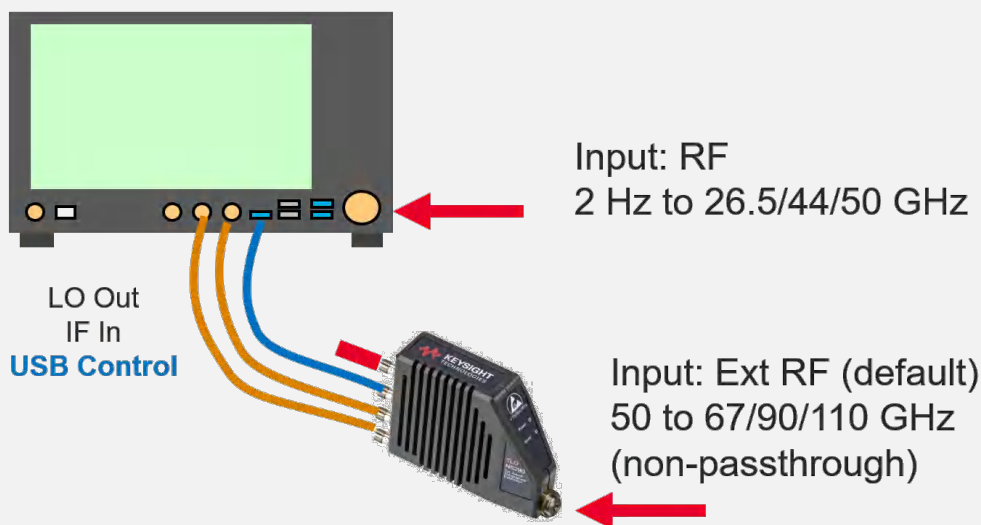


Figure 7. Configuration 2, dual inputs

Configuration 2 requires N9042B-EXW only. Pass Thru output from V3050A is terminated by 50 Ohm load (provided) and not connected to N9042B. The signal analyzer measurement system now has two inputs, operated one at a time.

1. Signals at N9042B RF Input can be measured 2 Hz up to 50 GHz
2. Signals at the V3050A Input are measured from 50 GHz to the maximum frequency of the V3050A signal analyzer frequency extender.

## Frequency

V3050A frequency range (applies to config 2; for config 1, lower frequency extends down to 2 Hz) (input terminated, RMS detection, normalized to 1 Hz)	
Option	Frequency range
F06	50 to 67 GHz
F09	50 to 90 GHz <sup>1</sup>
F11	50 to 110 GHz <sup>2</sup>

1. Option F09 conforms to limitations governing export to restricted countries (does not require IVL). When used for wide-bandwidth analysis (IQ), the highest allowed frequency (at center of bandwidth) is reduced by ½ of the maximum bandwidth that is configured (optional licenses) for a given instrument. For example, with option R20 licensed (2 GHz analysis bandwidth), the maximum center frequency allowed is 89 GHz.
2. IVL required for export to restricted countries.

Frequency accuracy, marker accuracy, resolution, etc. based on N9042B frequency and time-base specifications, times the LO multiplier factor in table below.

V3050A bands (simplified)			
Band	Frequency range (approx.)	LO multiplier	Pre-Selection filter, 1 dB BW (nom)
A	50 to 58 GHz	8	48.7 to 59 GHz
B	58 to 65 GHz	12	56.5 to 66.7 GHz
C	65 to 72 GHz	12	64.2 to 74.2 GHz
D	72 to 80 GHz	16	71.7 to 81.6 GHz
E	80 to 87.5 GHz	12,16	79.1 to 90.0 GHz
F	87.5 to 110 GHz	16,18	n/a <sup>1</sup>

1. "Software preselection" methods (multiple acquisitions) used for image suppression in this band.

## Phase Noise

V3050A Phase noise, when combined with N9042B (SSB, normalized to 1 Hz) (nom)				
Frequency	Offset			
	10 kHz	100 kHz	1 MHz	10 MHz
55 GHz	-104 dBc/Hz	-108 dBc/Hz	-120 dBc/Hz	-125 dBc/Hz
67 GHz	-104 dBc/Hz	-108 dBc/Hz	-120 dBc/Hz	-125 dBc/Hz
80 GHz	-105 dBc/Hz	-109 dBc/Hz	-120 dBc/Hz	-125 dBc/Hz
85 GHz	-101 dBc/Hz	-106 dBc/Hz	-118 dBc/Hz	-121 dBc/Hz

## Amplitude

Power / Amplitude	
Input power, max	+18 dBm (63 mW), CW or pulsed 0 VDC
Attenuator	0 to 26 dB, in 2 dB steps, electronic switching <sup>1</sup>
Amplitude accuracy	± 3 dB (nom), 50 to 110 GHz <sup>2</sup>
Measurement range	Nominally from [DANL + Attenuator + 10logRBW] to [(1 dB Gain Compression) + Attenuator]

1. The V3050A attenuator acts on signals > 50 GHz; the attenuation for signals < 50 GHz resides inside N9042B, and can be set independently, for both Config-1 and Config-2.
2. Nominal system absolute amplitude uncertainty, including contributions from V3050A calibration accuracy (cal data), EXW port amplitude accuracy, IF cables loss, and IF mismatch uncertainty. Note: V3050A supports use of U9361 RCal calibrator.



## DANL (Displayed Average Noise Level)

V3050A DANL (applies to config 1 and config 2) (input terminated, 0 dB attenuation, RMS detection, normalized to 1 Hz) (nom)	
Frequency	DANL (nom)
50 to 80 GHz	-150 dBm/Hz
> 80 to 90 GHz	-145 dBm/Hz
> 90 to 100 GHz	-143 dBm/Hz
> 100 to 105 GHz	-140 dBm/Hz
> 105 to 108 GHz	-130 dBm/Hz
> 108 GHz	-125 dBm/Hz

## Insertion Loss of Pass-Thru Path

Config 1 will route signals < 50 GHz thru the V3050A and Pass Thru cable to N9042A RF Input. The insertion loss will impact performance for frequencies < 50 GHz, *when referenced to the V3050A Input connector*.

- DANL will be increased (degraded) by factors in this table
- TOI and 1dB compression will be increased (improved) by these factors
- Dynamic range stays the same
- Absolute amplitude accuracy stays the same (uses correction factors to compensate)

V3050A throughpath insertion loss (mismatch not included) (nom) ("Spot" frequency points are given; approximate other frequencies with straight-line interpolation)			
Frequency point	Insertion loss, V3050A input to pass-thru output	Insertion loss, 1-meter Pass Thru cable + 2.4 mm adapter	Insertion loss, combined
100 MHz	3.1 dB	0.2 dB	3.3 dB
1 GHz	3.5 dB	0.7 dB	4.2 dB
5 GHz	4.0 dB	1.0 dB	5.0 dB
10 GHz	4.5 dB	1.5 dB	6.0 dB
20 GHz	5.5 dB	2.1 dB	7.6 dB
30 GHz	7.0 dB	2.6 dB	9.6 dB
40 GHz	7.5 dB	3.1 dB	10.6 dB
50 GHz	12.0 dB	3.5 dB	15.5 dB

## 1 dB Gain Compression

Gain Compression (RF input to IF output, with 0 dB attenuation, absolute power level where converter linearity deviates by more than 1 dB from straight line) (another figure-of-merit for analyzer distortion is TOI; it can be estimated as 10 dB higher than values below)	
Freq range	1 dB compression level (nom)
50 to 60 GHz	> -15 dBm
> 60 to 80 GHz	> -20 dBm
> 80 to 105 GHz	> -25 dBm
> 105 to 110 GHz	> -15 dBm

## V3050A General and Supplemental Information

Power / Amplitude ranges	
LO input level	> = 0 dBm (nom), to achieve nom. conversion loss and cal accuracy (not user controllable)
	(-10 dBm leads to changes of 1 to 2.5 dB in conversion loss) (nom)
	+18 dBm max (damage level)
Preselector type	5-band, electronically switched, band-pass filter; see table above
Image rejection	> 60 dB (nom), 50 to 88 GHz
	> 30 dB (nom), 88 to 110 GHz; supplemented with software pre-selection
Spurious responses	< -60 dBm (nom), for input signals at -20 dBm, anywhere in 50 to 110 GHz
Input Connector	1.0 mm (m), ruggedized
Input match (nom)	< -10 dB return loss (1.9 VSWR), at 50 to 90 GHz, Attenuation 10 dB
	< -5 dB return loss (3.5 VSWR), at 90 to 110 GHz, Attenuation 10 dB
Rear connectors (listed top to bottom)	LO Out: 2.4 mm (f) <reserved for future use>
	LO In: 2.4 mm (f)
	IF Out: 3.5 mm (f)
	Pass Thru < 50 GHz: 1.85 mm (f) (can be mated with 2.4 mm)
USB connector	USB C PD: USB Type-C with Power Delivery (requires 15 V, 1.75 A, 27 W minimum)
IF frequency out	7.5225 GHz (in swept)
Data storage	Factory cal data stored in non-volatile memory, read by N9042B (not user-accessible)
Dimensions	Length: 93 mm (3.66 in), without connectors; 128 mm (5.04 in), with connector
	Height: 81 mm (3.19 in)
	Width (Thickness): 36 mm (1.42 in)
Weight	0.42 kg (0.19 lbs)
Mounting points	4 each threaded holes for M3 x 0.5
Accessories included	Adapter, 1.0 mm to 1.0 mm (connector saver) with Opt F09 and F11
	Adapter, 1.0 mm to 1.85 mm with Opt F06
	Adapter locking collar (V3050-60006)
	Adapter, 2.4 mm (33311-82005) (for Pass-Thru at N9042B Input)
	Torque wrench, 14 mm, torque 10 in-lb and 4 in-lb
	Interface cable bundle, 4 cables, ~1 meter long (V3050-60004)
	Base plate (press fit, weighted for stabilization) (V3050-60005)
Environmental and certifications	
Temperature range	Operating: 20 to 30 °C
	Storage: 0 to 40 °C
Cooling	Active forced-air fan cooling; must maintain 5 cm (2 in) of clearance around faces of V3050A with vents

## Additional Resources

The N9042B UXA X-Series signal analyzer isn't the only thing that will bring you to RF breakthroughs. Powerful software drives your measurements while finely-tuned hardware takes them to new heights. In order to move the measurement plane to your device under test, reach even higher levels of measurement accuracy, and achieve 4 GHz of signal analysis and generation, the N9042B UXA partners with the:

- [N9042B UXA X-Series signal analyzer](#)
- [PathWave X-Series measurement applications](#) and [PathWave Vector Signal Analysis \(VSA\)](#)
- [V3050A frequency extender](#) for an unbanded, preselected frequency range to 110 GHz
- [U9361 RCal](#) receiver calibrator for improved receiver test system accuracy by 10X
- [M9383B VXG](#) signal generator for wideband stimulus and response testing
- [N9042B UXA Signal Analyzer Configuration Guide \(3121-1036.EN\)](#)

[www.keysight.com/find/N9042B](http://www.keysight.com/find/N9042B)

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications, or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

