

QCHA890

84.8~116GHz, C890

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 84.8~116GHz
Center Frequency: 100GHz
Gain: 18, 20, 22, 25dB
VSWR: 1.25 max.
3dB Beam Width: 23°, 17°, 12°, 9°

Mechanical

Interface: C890

How To Order

QCHA890-X


X: Gain in dB

Examples:

To order an Antenna, 84.8-116GHz, 18dB, C890, specify QCHA890-18.

Customization is available upon request.

Outline Drawings

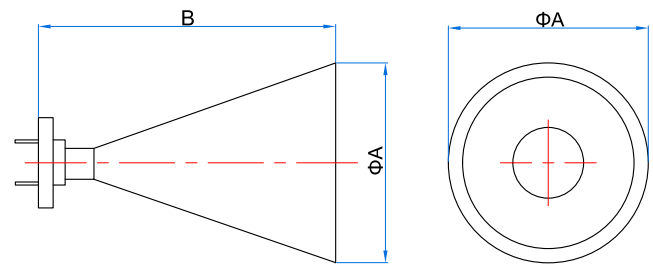

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Gain	A	B
18dB	11 [.433]	11 [.433]
20dB	15 [.591]	20 [.787]
22dB	20 [.787]	30 [1.181]
25dB	36 [1.417]	60 [2.362]